



# Efficient Illumination, Enduring Safety

INDUSTRIAL LIGHTING

# Go beyond illumination

More than

**MILLION**

light points across india  
for industrial workspaces

More than

**4 DECADES**

of presence  
in Industrial Lighting

Lighting solutions

**DESIGNED**

to meet varied industrial  
segments & environments



**9** Legacy  
of  
Decades



Inhouse R&D  
Facilities  
along with  
Manufacturing  
Facilities



Concept  
to Care

## ENSURING THE BEST FIT INDUSTRIAL LIGHTING SYSTEM

Creating a good Industrial Lighting system involves careful consideration of various parameters. Lighting Designer should take into account the operating conditions of the site, application and the visual tasks for which illumination is required. Selecting the appropriate luminaire for an industrial space involves considering several factors to ensure optimal lighting performance.

Important aspects that a lighting designer considers to arrive at Best Fit lighting solutions include -



### LIGHTING NEEDS OF THE VISUAL TASK

Understand the specific lighting needs of the industrial space. Type of tasks performed and importance of the visual task decides required light levels. One should also consider any specific lighting regulations or standards required for the given application area.



### SPACE LAYOUT AND DESIGN

Consider the layout and dimensions of the industrial space. This includes ceiling height, the presence of obstacles or machineries, and the arrangement of work areas. These factors determine the placement and type of luminaires needed. One should also consider the passage ways and emergency exits while selecting the luminaire.



### LUMEN OUTPUT AND DISTRIBUTION


Determine the required lumen output of luminaire to achieve the desired light levels in the industrial space. Consider the beam angle and light distribution pattern of the luminaire to ensure uniform lighting across the area.



### DURABILITY AND PROTECTION

Industrial environments can be harsh, with factors like dust, moisture, and vibrations. Select luminaires that are designed to withstand these conditions and have appropriate IP (Ingress Protection) ratings to ensure necessary protection.

By carefully considering these factors, you can select the most suitable luminaires for your industrial space, providing optimal lighting conditions for productivity, safety, and energy efficiency. It is recommended to consult with lighting professionals or manufacturers for expert guidance in luminaire selection.



### ENERGY EFFICIENCY

Opt for luminaires with high energy efficiency ratings to reduce electricity consumption and operating costs.



### EASE OF MAINTENANCE

Luminaire designs that ensure ease of maintenance are very important for users as it reduces downtime in case of failures.



### COMPLIANCE AND SAFETY

Ensure that the selected luminaires comply with relevant safety standards and regulations for industrial spaces. This includes factors like electrical safety, fire codes, and hazardous area requirements.



### SMART LIGHTING OPTIONS


Industrial workspaces are now adopting smart controls in managing the lighting systems. Efficient use of day light harvesting, motion sensors and monitoring systems are being used in sync with the luminaires installed in the work area.

Important specifications that an industrial user needs to check while deciding the best-fit luminaire for the application area.



	Features :	Designer's Checklist :
	<b>Applications</b>	Standard Industrial Workspace, Hazardous or Non-hazardous area, Clean Room area, High temp zones, areas with high dust or water splashing, semi outdoor
	<b>Type of Luminaire</b>	Highbay – Midbay, Wellglass, Cleanroom, IP65 Batten.
	<b>Height of the Installation</b>	Depending on the height of light point installation, we decide to use suitable luminaire like Wellglass, Midbay/Highbay and Wattages.
	<b>Type of Mounting</b>	Eye Bolt, Trunk Mounting, Mounting Bracket, Recess, Surface.
	<b>Lumens Required</b>	Depending on the visual task, designer ascertains the required Lux levels and required lumen output of luminaires.
	<b>Efficacy</b>	System lumen/watt required.
	<b>IP Rating</b>	IP20 / IP65 / IP66 depending on application area environment IP rating is decided.
	<b>CCT</b>	Warm White / Neutral White / Cool Day White (3000/4000/ 5700/6500). Standard colour temperature used in industrial workspace is 5700K. In few dusty areas , users prefer warm white options.
	<b>CRI</b>	70 is standard for most industrial applications. When color of the visual task is more important customers go for CRI 80.
	<b>Surge Protection</b>	Most industrial luminaires have built in surge protection of 3 kv/4kv . In specific cases , we can also provide external surge protection of 10kV SPD.
	<b>Beam Angle</b>	600 or Narrow Beam for high ceiling areas and 900 or wide beam for low height areas.

# INDUSTRIAL LIGHTING SEGMENTS

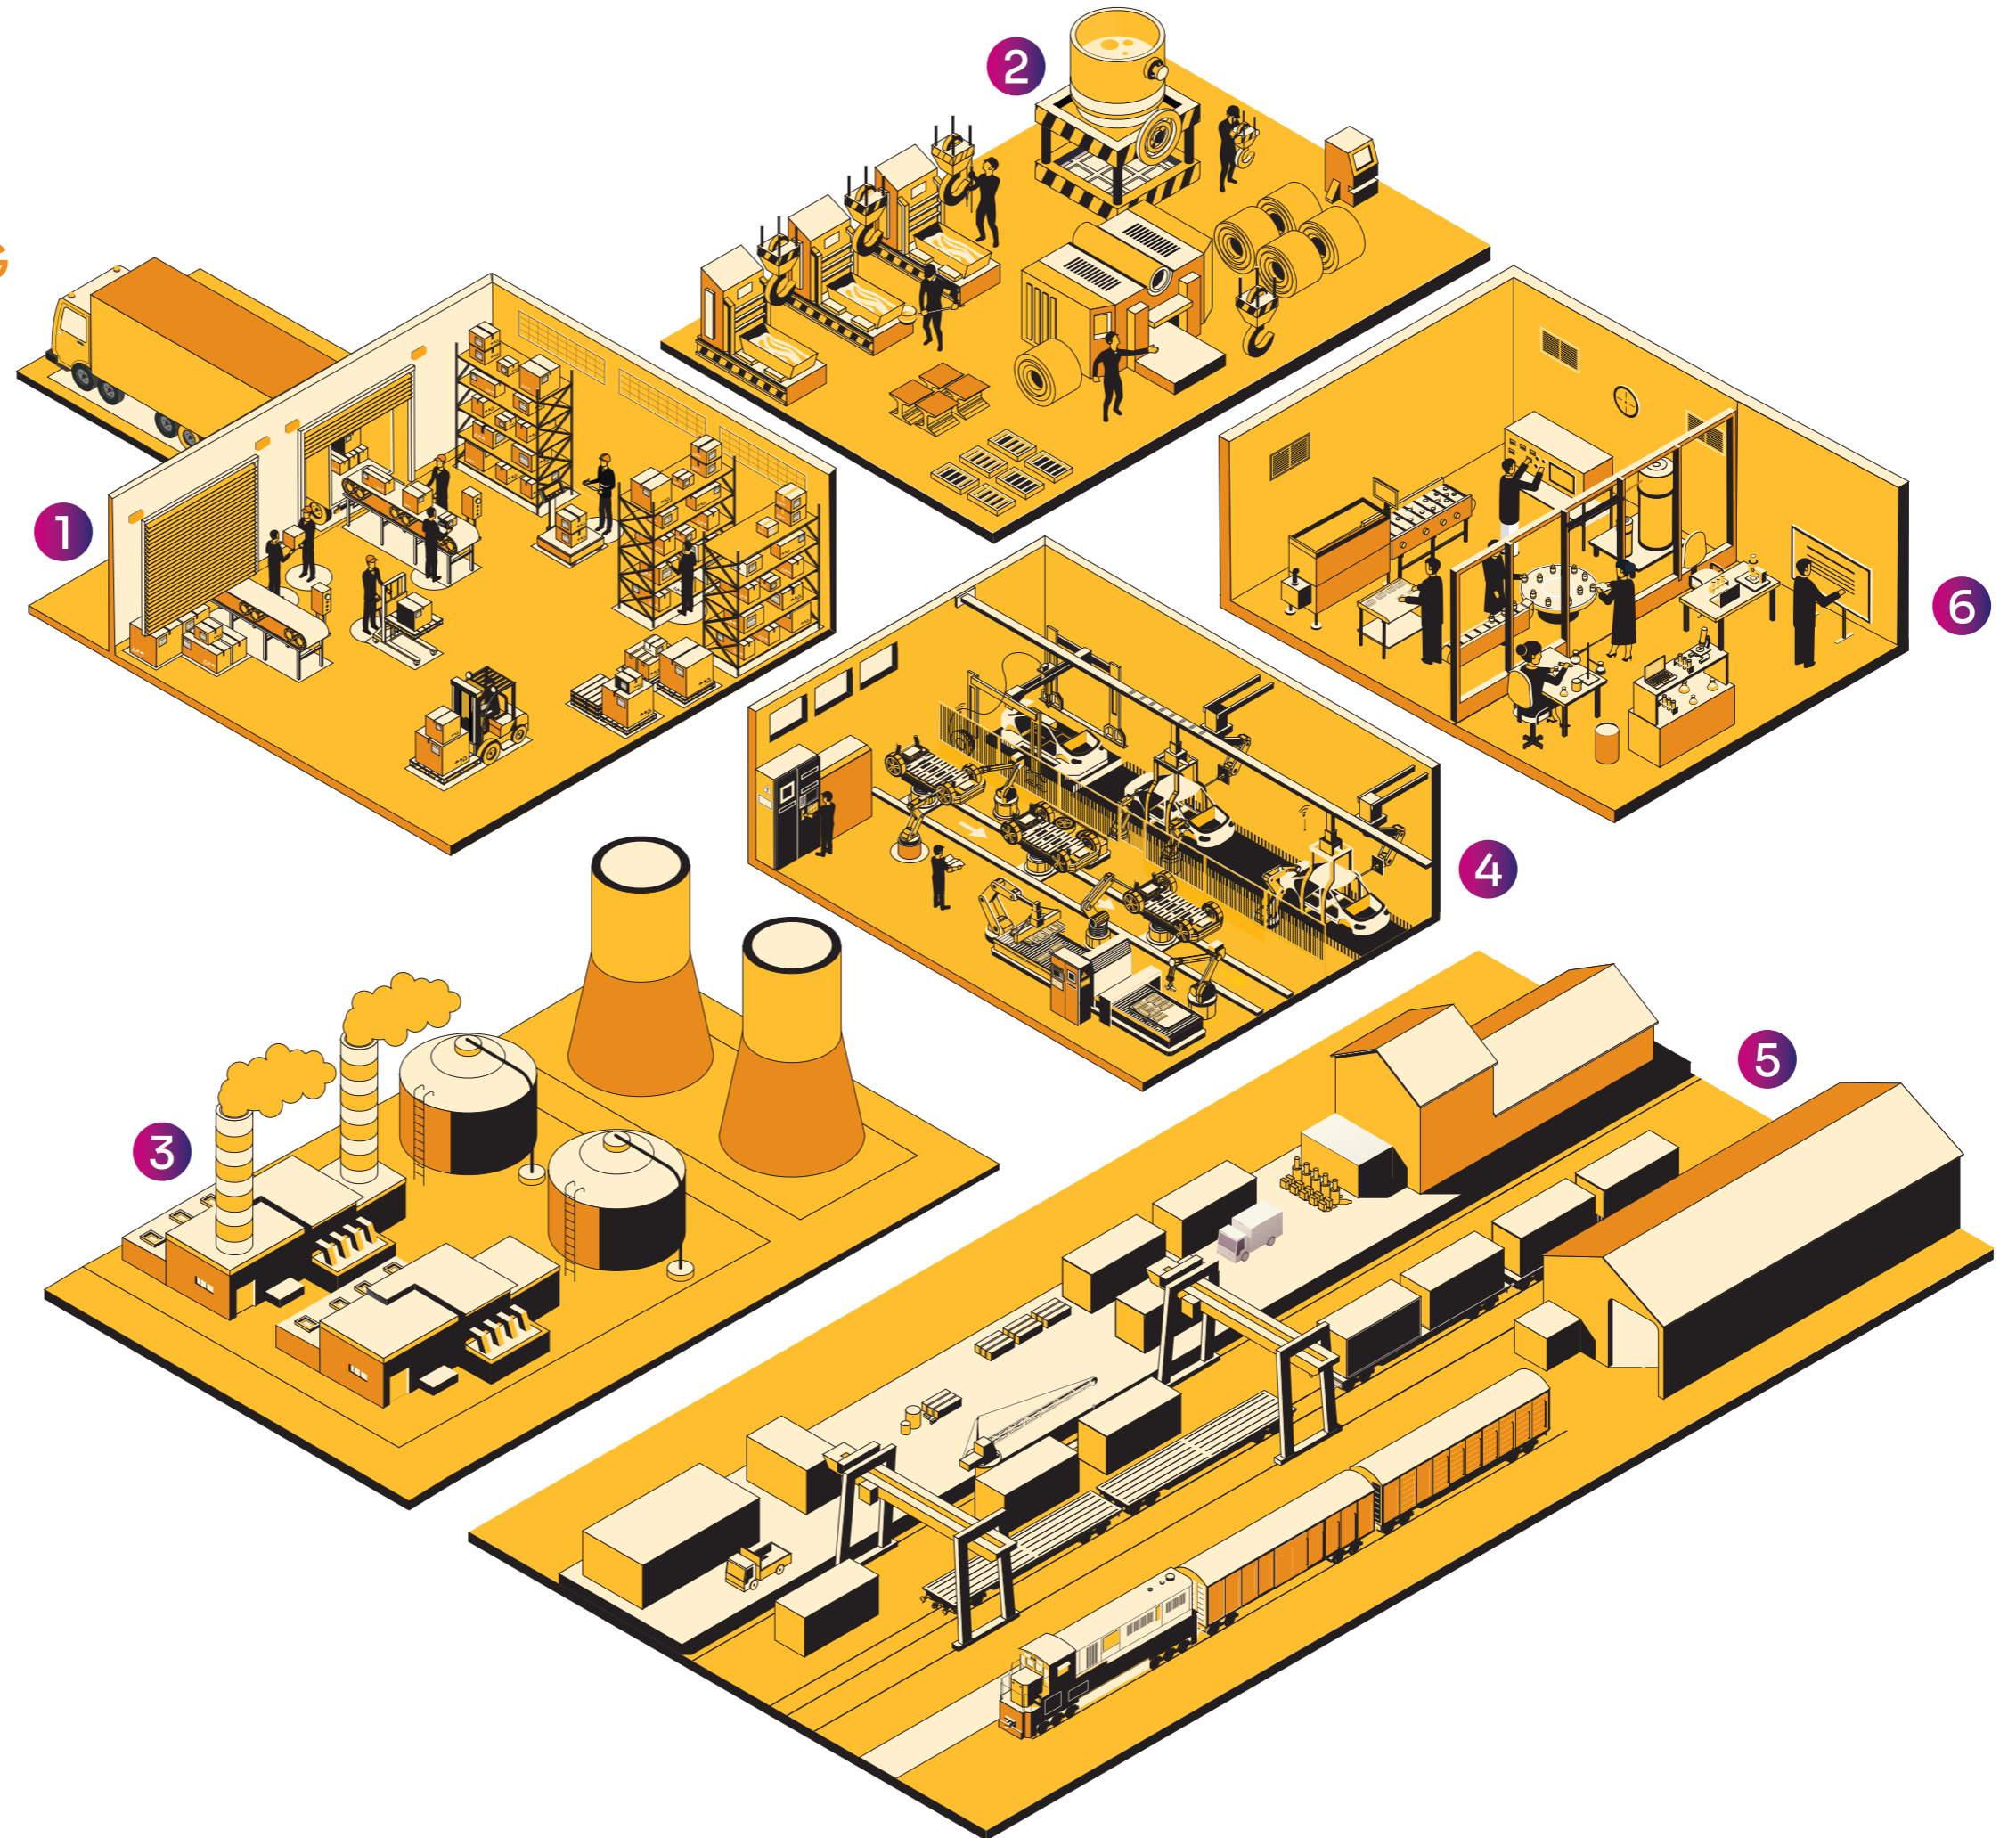

1  Warehouse & Logistics

2  Steel & Metal Manufacturer

3  Power & Infrastructure

4  Auto & Ancillary

5  METROS & Railway

6  Pharma & Healthcare

# THE FOURTH INDUSTRIAL REVOLUTION

At Bajaj Electricals, we are continuously innovating to help our clients successfully deliver Industry 4.0 goals. Our products are now Industry 4.0 Ready and our Bajaj SynChronus platform helps customer improve productivity and energy savings



## INDUSTRIAL Revolution

The First Industrial Revolution 1.0, which began in the 18th century with the use of steam power and mechanization. This saw the rise of large-scale industries such as textiles, iron, and coal mining. The Technological Revolution, also known as the second industrial revolution, began in the 19th century with the discovery of electricity and assembly line production. This brought about mass production in industries such as automobiles. The third industrial revolution was the advent of the Digital Revolution, which began in the 1970s with partial automation using memory-programmable controls and computers. This introduced automation in industries such as electronics. The journey further continues to connected solutions.



## INDUSTRY 4.0 Connected Industry

In the era of Industry 4.0, also known as the fourth industrial revolution, the fusion of human expertise with digitally-driven machinery and advanced connectivity revolutionizes manufacturing. People play a central role, empowered by software systems that streamline their tasks to unprecedented levels.

This seamless integration extends across the entire value chain, where every object in production or use boasts unique identification and autonomous communication capabilities. Vertical information flows span from individual components to the company's IT platform, while horizontal communication links machines within production and the broader manufacturing ecosystem.

# Introducing **SYNCHRONOUS**

## ACHIEVING INDUSTRY 4.0 GOALS WITH SMART LIGHTING SOLUTIONS

With the Bajaj Synchronous system, your evolving needs always find the perfect solution. It's three-layered offering offers flexibility, easily upgradable with new hardware or software. As your system expands, rest assured—every previously installed light point remains an integral part of the seamless progression. Your smart lighting journey is not just a path; it's a continuum of possibilities.

Bajaj Synchronous shall help customers embark on the journey to achieve their Industry 4.0 goals efficiently.



### **SYNCHRONOUS** ...PREMIUM



Occupancy Analytics



Multiple Sites Access



Workspace Quality Analytics



BMS Integration



### **SYNCHRONOUS** ...PRO



Cloud Integration



Scene Manager



Remote Site Management



Data Rich Dashboard



Predictive Maintenance



### **SYNCHRONOUS** ...FOUNDATION



Sensor Integration



Seamless Connectivity on BLE



Greenfield & Retrofit Ready




Simple Setup




Energy Savings

## SYSTEM ARCHITECTURE

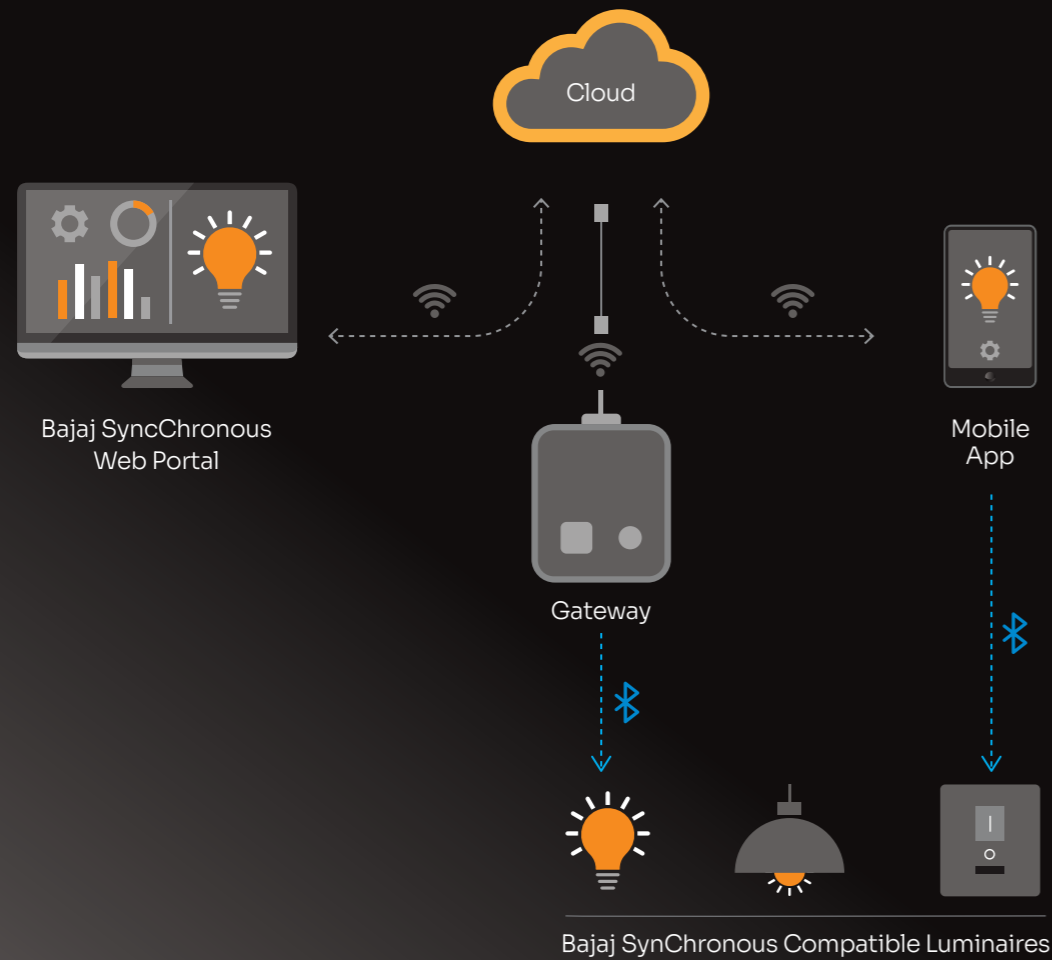


## INSTALL IN A SNAP!

### PLANNING

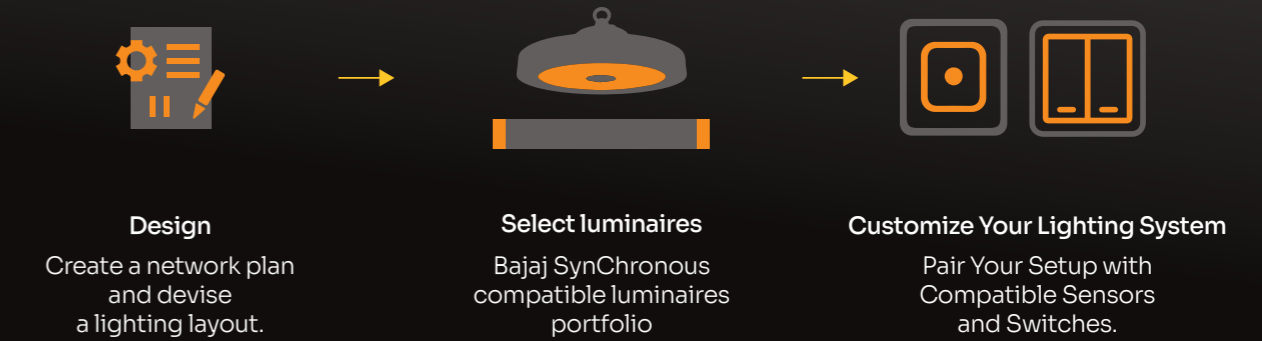

### SETUP

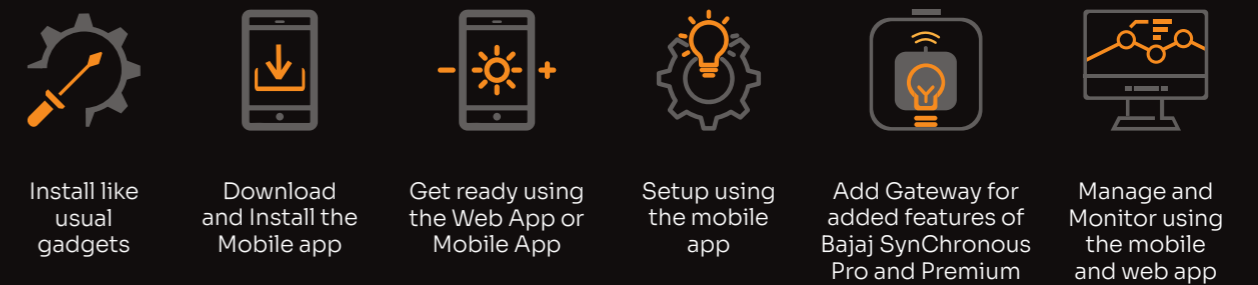

## FEATURES AND BENEFITS



**Motion Sensing**  
activates lights only when in use, saving energy.



**Daylight Harvesting**  
automatically dims lights based on sunlight levels.



**Wireless switches**  
enable easy lighting control from anywhere they're installed.



**Remote Maintenance**  
Monitor device lifetimes, potential failures, and burning hours for improved building upkeep.



**Energy Usage Analysis**  
Access detailed energy consumption reports for up to 12 months, exportable in .csv format for further analysis.



**Automatic Upgrades**  
Seamlessly receive background updates for features and security with minimal disruption to building operations.



**Scene Scheduler**  
create and recall custom scenes effortlessly using wireless switches or an app.



**Organise your lights**  
by grouping them into networks and further subdividing into groups and zones for precise control.



**App Control**  
Customize nearby lights according to user preferences.



**Light Scheduler**  
Schedule scenes to suit your needs.



**Remote Light Control**  
Remote control all lights using the web app.



## HIGHBAY LIGHTING

Creates an ideal and safe workspace with high level of accuracy and performance.

Right Illumination of Production bay is critical for productivity. Hence, well-designed and energy-efficient lighting plays an important role in ensuring uniform illumination so that operations take place safely and smoothly.

# NOVABAY

Blend of beauty and performance

Bajaj Novabay- The most energy efficient highbay lighting system, specially designed to deliver high lumens blended with aesthetic design of the luminaire



**160**  
lm/W

- Superior & appealing aesthetics**  
 Pressure die-cast aluminum housing with Aesthetically designed LED layout
- Best in Class System Efficacy**  
 160lm/w, ensures highest energy saving with quicker payback
- Uniform Distribution**  
 Round Form Factor Luminaire
- High Performance Driver**  
 Constant current driver is provided with built in surge protection, open & short circuit protection, IP67 protection & EMI/EMC compliance

**IP66**  
Ingress Protection

**4KV**  
Internal Surge Protection -  
10kV External SPD

**THD<10%**  
**PF>0.95**


**SYNCHRONUS**  
ENABLED



## Applications



## Product Diagram

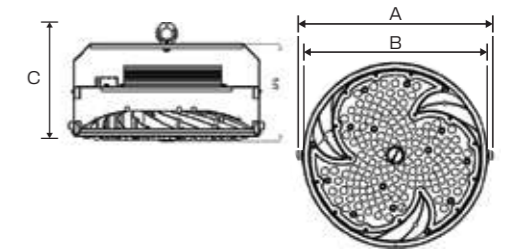

Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to 50°C
Input Voltage Range	140 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
80W	Novabay 80W WH NB PC SD XE	240	12800	0.35A	236	221	141
100W	Novabay 100W WH NB PC SD XE	240	16000	0.43A	236	221	141
120W	Novabay 120W WH NB PC SD XE	240	19200	0.52A	296	280	153
150W	Novabay 150W WH NB PC SD XE	240	24000	0.65A	296	280	153
200W	Novabay 200W WH NB PC SD XE	240	32000	0.87A	344	325	171

Also available with 130lm/W option.  
NB = 60° beam angle


# NUKE


Robust product designed to work in harsh weather conditions

Nuke highbay is with high grade aluminium die-cast heat sink that guarantees commendable thermal management. Furthermore, it is prewired with accessories up to the terminal block and eyebolt for hassle-free installation.



- 

**Superior & appealing aesthetics**  
High resistance toughened glass to cater to high temperature harsh environments
- 

**Best in Class System Efficacy**  
130lm/w, ensures highest energy saving
- 

**Narrow & Wide Beam Optics**  
For more flexibility that caters to various applications & mounting height requirements
- 

**High Performance Driver**  
Separate driver box for better thermal management


- 

**IP66**  
Ingress Protection
- 

**4KV**  
Internal Surge Protection -  
10kV External SPD
- 

THD<10%  
PF>0.95



**SYNCHRONOUS**  
ENABLED

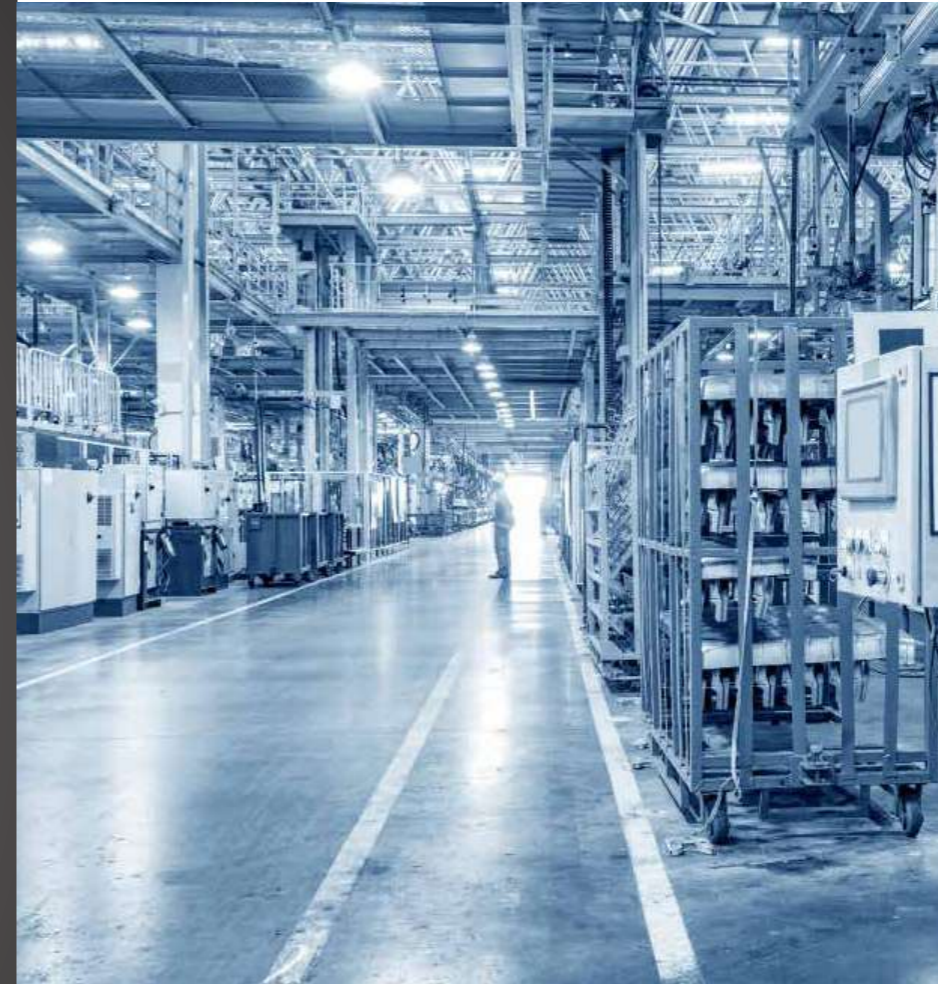

## Applications



## Product Diagram



Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to +50°C
Input Voltage Range	140 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions			
					A	B	C	D
100W	BIHNK 100W WH NB TG SD	240	13000	0.43A	245	180	145	182
120W	BIHNK 120W WH NB TG SD	240	15600	0.52A	280	260	130	155
150W	BIHNK 150W WH NB TG SD	240	19500	0.65A	300	260	130	155
200W	BIHNK 200W WH NB TG SD	240	26000	0.87A	305	290	130	155
240W	BIHNK 240W WH NB TG SD	240	31200	1.05A	305	290	130	155

PC lens diffuser version with 150 lm/W efficacy is available  
NB = 60° beam angle, WB = 90° beam angle optional

# OPTIBAY

For Optimum Lighting Solutions for Industrial Bays

Optibay is a new range of highbay lighting solution that gives optimum life cycle cost—combining superior illumination experience with optimised total system investment to our Industrial Customers



**Superior & appealing aesthetics**  
Epoxy powder coated pressure die-cast aluminium PDC housing with modular lens




**Best in Class System Efficacy**  
≥120 lumens per watt



**Uniform Distribution**  
Round Form Factor Luminaire



**High Performance Driver**  
Dedicated driver box housing containing Potted CC Driver for better thermal isolation



**IP66**  
Ingress Protection



**4KV**  
Internal Surge Protection and 10kv external SPD



THD<10%  
PF>0.95

**SYNCHRONOUS**  
ENABLED



## Applications



Warehouse





Industry



Factory

## Product Diagram



Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to 50°C
Input Voltage Range	140 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
80W	Optibay 80W WH NB PC SD	240	9600	0.38A	270	130
100W	Optibay 100W WH NB PC SD	240	12000	0.48A	270	130
120W	Optibay 120W WH NB PC SD	240	14400	0.57A	270	130
150W	Optibay 150W WH NB PC SD	240	18000	0.72A	303	130

\* CRI>80 version available for special applications  
NB = 60° beam angle, WB = 90° beam angle optional

# BLAZE LINEAR

## Designed to Illuminate Large Spaces

Linear Highbay is designed for lighting of special application areas like warehouses, and passageways.



### Slick & Thermally Efficient Design

For longer life and reliable operations with matt grey powder coated aluminium extruded housing




### Best in Class System Efficacy

130lm/w, ensures highest energy saving




### Ideal for horizontal lighting spread

LEDs are provided with lens optics to get optimum optical performance



### High Performance Driver

Specially designed to have built-in surge voltage, open/short circuit protections



**IP66**  
Ingress Protection




**4KV**  
Internal Surge Protection




THD<10%  
PF>0.95

**SYNCHRONOUS**  
ENABLED

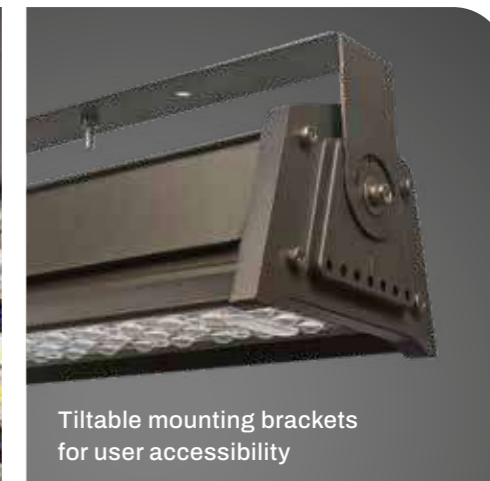

Tiltable mounting brackets for user accessibility

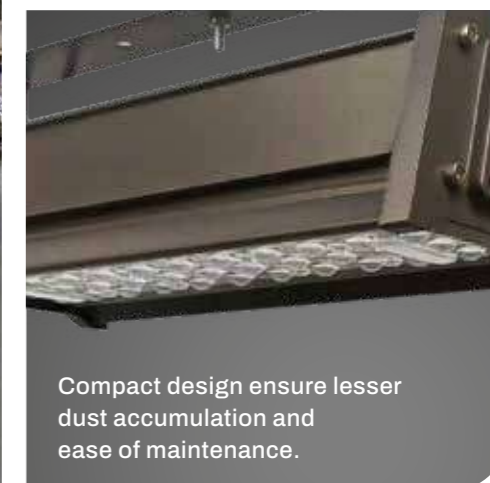

Compact design ensure lesser dust accumulation and ease of maintenance.

## Applications



Warehouse




Industry



Factory

## Product Diagram

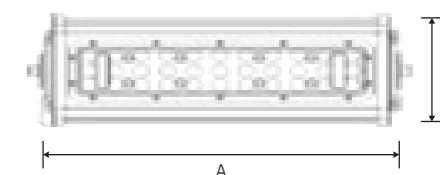

Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to +50°C
Input Voltage Range	140 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
60W	BGHBM .nxt BL 78L WH SY SD	240	7800	0.26A	358	150
80W	BGHBM .nxt BL 104L WH SY SD	240	10400	0.35A	358	150
100W	BGHBM .nxt BL 130L WH SY SD	240	13000	0.42A	358	150
120W	BGHBM .nxt BL 156 L WH SY SD	240	15600	0.52A	358	150
150W	BGHBM .nxt BL 195L WH SY SD	240	19500	0.65A	688	150



# INDUSTRIAL WELLGLASS

LED Industrial Well Glass Luminaires, where precision meets durability. Designed for optimal performance in industrial settings, these luminaires illuminate workspaces with unparalleled efficiency. Discover the perfect synergy of innovation and rugged design with our LED Industrial Well Glass Luminaires.

# VERDANT

## LED Wellglass Designed to work in industrial environments

Dicast AL housing LED wellglass luminaires with PC clear/opal diffuser. Equipped with 4 kV in-built surge protection, IP66 Protection rating. Eye bolt and cradle is provided for mounting.



### Slick & Thermally Efficient Design

For longer life and reliable operations with matt grey powder coated pressure die-cast aluminum housing




### Best in Class System Efficacy

100lm/W, ensures highest energy saving




### Uniform Distribution of light



### Built-in High Performance Driver

Potted Driver used for long life and thermal performance



**IP66**  
Ingress Protection



**4kV**  
Internal Surge Protection -  
10kV External SPD optional



THD<10%  
PF>0.95



Eyebolt-Cradle is given for ease of mounting



Compact design ensure lesser dust accumulation and ease of maintenance.

## Applications



Coal




Cement  
Factory



Conveyor  
Belts

## Product Diagram

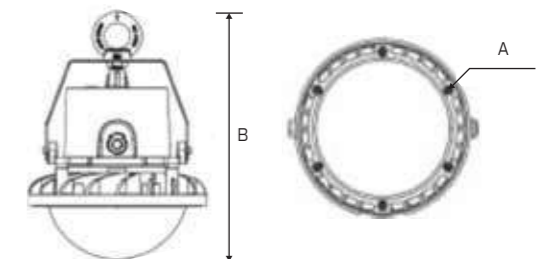

Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +50°C
Input Voltage Range	140 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
30W	BIWDN 30W LED WH EC OD P	240	3000	0.14A	Ø135	188
35W	BIWDN 35W LED WH EC OD P	240	3500	0.16A	Ø135	188
40W	BIWDN 40W LED WH EC OD P	240	4000	0.19A	Ø135	188
45W	BIWDN 45L LED WH EC CDP	240	4500	0.20A	Ø135	188

Also available with clear diffuser

# VERDANT PRO

LED Wellglass Designed to work in industrial environments

Dicast AL housing LED wellglass luminaires with PC opal diffuser. Equipped with 4 kV in-built surge protection, IP66 Protection rating. Eye bolt and cradle is provided for mounting.



- 


**Slick & Thermally Efficient Design**  
For longer life and reliable operations with matt grey powder coated pressure die-cast aluminum housing
- 

**Best in Class System Efficacy**  
100lm/W, ensures highest energy saving
- 

**Uniform Distribution of light**
- 

**Built-in High Performance Driver**  
Potted Driver used for long life and thermal performance

 **IP66**  
Ingress Protection

 **4kV**  
Internal Surge Protection -  
10kV External SPD optional

 **THD<10%**  
**PF>0.95**




Cradle is given for ease of mounting




Compact design ensure lesser dust accumulation and ease of maintenance.

## Applications



## Product Diagram



Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +50°C
Input Voltage Range	140 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
65W	BIWDN 65L LED WH P	240	6500	0.30A	Ø164	187
70W	BIWDN 70W LED WH EC OD	240	7000	0.30A	Ø164	187

Also available with clear diffuser



# INDUSTRIAL BATTENS

Cost-Effective Lighting  
for Industrial Spaces

Durable and versatile, industrial LED batten lights are ideal for warehouses and factories. They offer powerful indoor and outdoor illumination, all while being cost-effective with low energy consumption.

# LINEA

## Surface/Pendent mounted Industrial Batten

Brightness well defined

Aluminium extrusion Housing LED batten luminaire with 120 lm/W efficacy. Suitable for surface/ suspended mounting applications.



### Superior & Apealing Aesthetics

White powder coated extruded aluminium housing with polycarbonate diffuser



### Best in Class System Efficacy

120lm/w, ensures highest energy saving




### Uniform Distribution

Opal diffuser is supported by a pair of engineering plastic end caps.



### High Performance Driver

Luminaire is provided with constant current LED driver with Open/Short circuit protection



IP20  
Ingress Protection



4KV  
Internal Surge Protection



THD<10%  
PF>0.95



Engineering plastic end caps which facilitate easy removal for maintenance.




### Applications




Warehouse



Textile Factory



Indoor Car Park



Assembly Line




Metro Station



Supermarket

### Product Diagram



Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +45°C
Input Voltage Range	140 to 270 V AC

### Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
20W	BLIR 24L WH PC SD	240	2400	0.09A	1220	40	47
40W	BLIR 48L WH PC SD	240	4800	0.19A	1220	40	47

# LINEA PLUS

Industrial Weatherproof Batten  
IP65 protection

Light that shines in every weather  
Industrial LED batten which is waterproof & corrosion resistant for all industrial applications.



**Superior & Appealing Aesthetics**  
White co-extruded PC housing with extruded aluminum base

**Best in Class System Efficacy**  
120lm/w, ensures highest energy saving

**Uniform Distribution**  
Opal diffuser is supported by a pair of engineering plastic end caps.

**High Performance Driver**  
Luminaire is provided with constant current LED driver with Open/Short circuit protection


**IP65**  
Ingress Protection

**4KV**  
Internal Surge Protection


THD<10%  
PF>0.95



## Applications

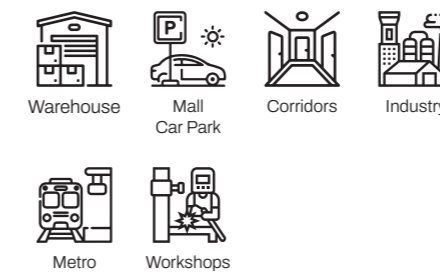

## Product Diagram

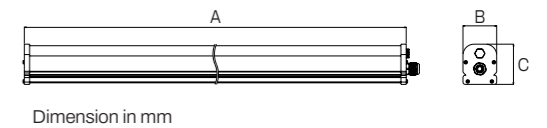

## Electrical Parameters

Correlated Color Temperature	6500K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +45°C
Input Voltage Range	140 to 270V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
20W	BEPC 20W CW LED XE	240	2400	0.096A	600	54.5	65
40W	BEPC 40W CW LED XE	240	4800	0.19A	1200	54.5	65

# LINEA BB

Industrial Weatherproof batten with emergency battery back-up

Polycarbonate housing with IP65 protection & Built-in emergency battery backup.



### Superior & Appealing Aesthetics

Corrosion proof Polycarbonate housing suitable for surface and suspension mounting



### Best in Class System Efficacy

120lm/w, ensures highest energy saving




### Power Back-up

Up to 2 hrs. (20% of rated lumen) at full charge battery full charging time up to 8-10 hours



### High Performance Driver

Constant current output driver with built-in surge protection



**IP66**  
Ingress Protection



**3KV**  
Internal Surge Protection



THD<10%  
PF>0.90



Universal mounting  
(surface plus suspended)



Slim Profile -  
Ease of maintenance

## Applications



Warehouse




Industry



Factory

## Product Diagram

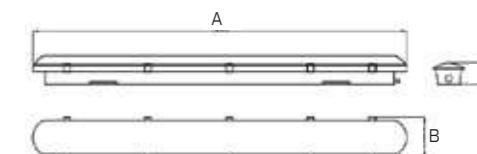

Dimension in mm

## Emergency Mode

- System wattage during battery charging up to 41.5W
- Battery type Li-FePo4
- Battery capacity 14.8V, 2Ah.
- Indicator - Red LED ON during battery charging mode
- Auto stop of battery charging on full charge

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +50°C
Input Voltage Range	140 to 270V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
36W	BIPC 40L LED XE WH WBB	270	4000	0.16A	1205	110.5	90

# LUXBLADE

## Industrial Weatherproof Batten

Light that shines in every weather  
Industrial LED batten which is waterproof & corrosion resistant for all industrial applications.



### Superior & Apealing Aesthetics

White powder coated extruded aluminium  
PC housing



### Best in Class System Efficacy

110lm/w, ensures highest energy saving




### Uniform Distribution

Opal diffuser for uniform light distribution



### High Performance Driver

Luminaire is provided with Built-in constant current LED driver with Open/Short circuit protection





**IP66**  
Ingress Protection



**4KV**  
Internal Surge Protection



THD<10%  
PF>0.95

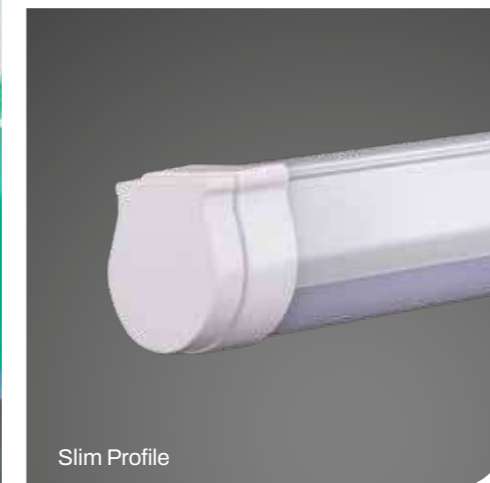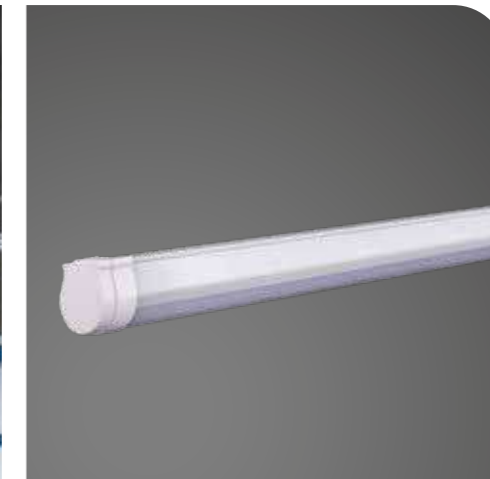

Slim Profile

### Applications



Warehouse



Mall  
Car Park



Corridors



Industry

### Product Diagram



Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +45°C
Input Voltage Range	180 to 270V AC

### Specifications & Dimensions





Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
36W	BIBLB 40L WH PC SD	240	4000	0.18A	1200	45	45

# WEE

## Industrial Bulkhead

A robust but aesthetically designed bulkhead  
WEE bulkhead is an energy efficient, robust & maintenance-free luminaire.



- 
**Superior & Apealing Aesthetics**  
 Combination of die-cast aluminum housing with polycarbonate diffuser gives robust design
- 
**Environment friendly**  
 Contains no mercury or lead
- 
**Uniform Distribution**  
 Polycarbonate opal diffuser for durable long life
- 
**High Performance Driver**  
 Constant current output driver with built-in surge protection

 **IP65**  
Ingress Protection

 **2.5KV**  
Internal Surge Protection


 **THD<10%**  
**PF>0.90**



### Applications



### Product Diagram



Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to +45°C
Input Voltage Range	180 to 270V AC

### Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
10W	BIBWP 10W LED	240	1000	0.044A	182	103	112



## LED CANOPY LUMINAIRE

Elevate your customers experience with our state of art canopy lighting solutions. Designed to captivate motorist, our lights create a welcoming atmosphere, guiding them to safety. Brighten up your station with vibrant illumination, ensuring a sense of security for every visitor. Our canopy lights not only enhance visibility but also elevate the aesthetics of your petrol station. Drive in with confidence, knowing you're under the radiance of safety and comfort.

# LUCID

## LED Canopy Luminaire

Highly energy efficient and exceptionally tough Canopy Luminaire Bajaj Lucid Canopy Luminaire is equipped with powder coated pressure die-cast aluminium housing. It has a heat resistance clear toughened glass and silicon gasket fixed with SS screws to maximise durability and safety.



### Superior & appealing aesthetics

Powder coated pressure die-cast aluminium housing with a heat resistance clear toughened glass



### Best in Class System Efficacy

with upto 120 lumens per watt



### Highest Mounting Flexibility

Full cradle is attached and alternative of eyebolt is also provided to give highest mounting flexibility to end users



### High Performance Driver

Dedicated driver box housing containing Potted CC Driver for better thermal isolation



**IP66**  
Ingress Protection



**4KV**  
Internal Surge Protection



THD<10%  
PF>0.95


**SYNCHRONOUS**  
ENABLED



Curve shaped luminaire to increase aesthetics and improve cut-out design



Only 4 screws –  
For ease of maintenance

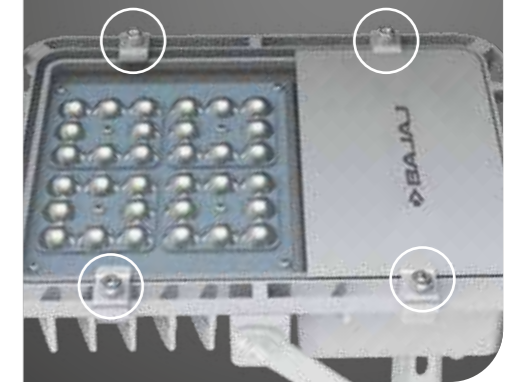

### Applications



Toll





Gas RO



Factory

### Product Diagram



Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +50°C
Input Voltage Range	140 to 280 V AC

### Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
80W	BICLD 80W WH TG SD	240	9600	0.34A	183	242	98
100W	BICLD 100W WH TG SD	240	12000	0.42A	183	242	98

\* Available 450x450mm CRCA frame for recess mounting

# LUCID-LINEAR

## LED Canopy Luminaire

This Linear Canopy Luminaire is equipped with extruded aluminium housing, aluminium die-cast end caps, and PC diffuser for extraordinary optical performance. The product is characterised with an external surge protection to ensure maximum safety at petrol stations.



### Superior & appealing aesthetics

Extruded aluminium housing for better thermal management designed to maximize optical performance



### Best in Class System Efficacy

Upto 100 lumens per watt efficacy




### Uniform Distribution

Polycarbonate diffuser for extraordinary optical performance



### High Performance Driver

A non-integrated driver that guarantees easy maintenance



**IP65**  
Ingress Protection



**4KV**  
Internal Surge Protection -  
10kV External SPD



THD<10%  
PF>0.95

**SYNCHRONOUS**  
ENABLED



Specially designed extrusion housing to maximize optical performance




IP 67 Non integral driver for ease of maintenance

### Applications



Petrol Pumps

### Product Diagram

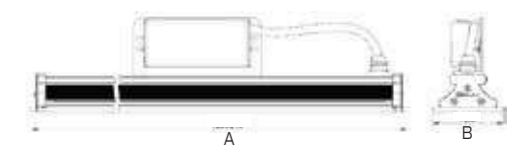

Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to 50°C
Input Voltage Range	140 to 270 V AC

### Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
40W	BGPPR LC 40L LED 4F WH SY NID	240	4000	0.17A	1200	70
80W	BGPPR LC 80L LED 8F WH SY NID	240	8000	0.35A	2400	70

\*20W option also available on request



# CLEANROOM LUMINAIRES

Lighting system designed for controlled environments

Manufacturing workspaces in the pharmaceutical industry, food processing plants, and electronic components industry requires dust-free - controlled environments. This requires special lighting systems.

# PRISTINE

## Bottom Opening Range

Lighting system for controlled environment  
Clean room luminaires are specifically designed to ensure that specifications of clean room environments, which require high levels of cleanliness and hygiene to prevent contamination of the products or processes being carried out within the space.



**Superior & appealing aesthetics**  
CRCA powder coated housing with screwless bottom frame



**Best in Class System Efficacy**  
with  $\geq 120\text{lm/W}$



**Uniform Distribution**  
Opal PMMA diffuser sealed in bottom frame with gasket



**Ease of Maintenance**  
Access from bottom



**IP65**  
Ingress Protection  
(From bottom)



**4KV**  
Internal Surge Protection



THD < 10%  
PF > 0.95

**SYNCHRONOUS**  
ENABLED



### Applications



Laboratory / OT




Food Processing



Pharmaceuticals

### Product Diagram

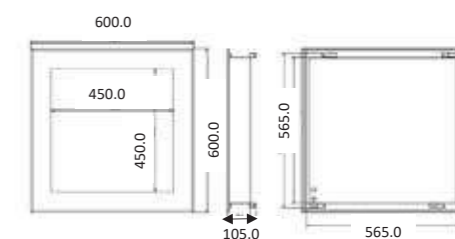

Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to 45°C
Input Voltage Range	140 to 270 V AC

### Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Cutout Size in mm
20W	BPRF 20W WH SL LED*	240	2000	0.09A	300 x 300
36W	BPRF 36W WH SL LED XE	240	4320	0.15A	565 x 565
45W	BPRF 45W WH SL LED XE	240	5400	0.19A	565 x 565
60W	BPRF 60W WH SL LED XE	240	7200	0.26A	565 x 565
80W	BPRF 80W WH SL LED XE	240	9600	0.35A	565 x 565

\*20W Efficacy - 100lm/W

# PRISTINE

## Top Opening Range

Lighting system for controlled environment  
Clean room luminaires are purposefully designed to ensure optimal performance within these controlled environments, where precision and reliability are paramount to sustaining the integrity of the space.



**Superior & appealing aesthetics**  
CRCA powder coated housing with screwless bottom frame

**Best in Class System Efficacy**  
with upto 120 lumens per watt

**Uniform Distribution**  
Opal PMMA diffuser sealed in bottom frame with gasket


**Ease of Maintenance**  
Access to the driver is from top.  
Easy mounting in walkable false ceiling.

**IP65**  
Ingress Protection  
(From bottom)

**4KV**  
Internal Surge Protection

**THD<10%**  
**PF>0.95**


**SYNCHRONOUS**  
ENABLED

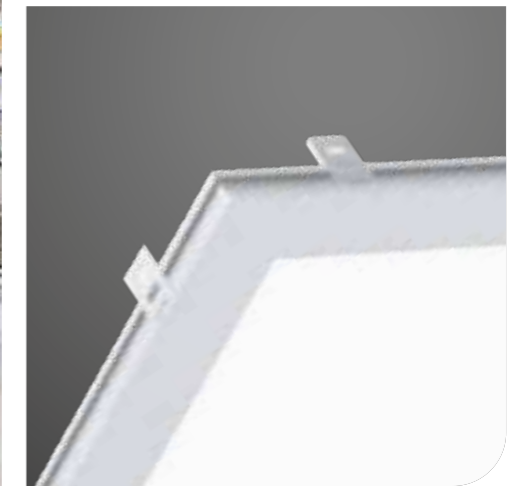

### Applications



### Product Diagram

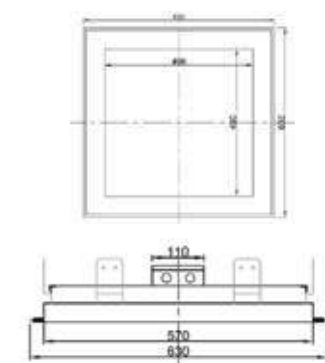

Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to 45°C
Input Voltage Range	140 to 270 V AC

### Specifications & Dimensions


Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Cutout Size in mm
20W	BPRR 20W WH SL LED XE	240	2000	0.09A	330 x 330
30W	BPRR 30W WH LED XE	240	3000	0.14A	600 x 600
36W	BPRR 36W WH SL LED XE	240	4320	0.16A	600 x 600
45W	BPRR 45W WH LED XE	240	5400	0.22A	600 x 600
60W	BPRR 60W WH LED XE	240	7200	0.29A	600 x 600
80W	BPRR 80W WH LED XE	240	9600	0.35A	600 x 600

Walkable false ceiling cover supplied on request

# PRISTINE

## Surface Mounting

Lighting system for controlled environment  
Clean room luminaires are meticulously crafted to meet the stringent requirements of clean room environments, where maintaining exceptionally high levels of cleanliness and hygiene is imperative to safeguard products or processes from contamination.

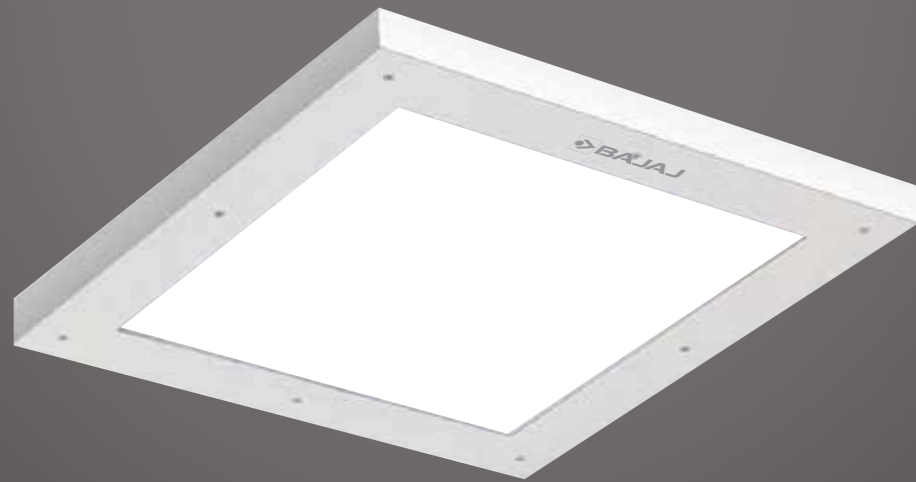

**Superior & appealing aesthetics**  
CRCA powder coated housing suitable for surface mounting



**Best in Class System Efficacy**  
with upto 100 lumens per watt



**Uniform Distribution**  
Opal PMMA diffuser sealed in bottom frame with gasket



**Ease of Maintenance**




**IP65**  
Ingress Protection  
(From bottom)



**4KV**  
Internal Surge Protection -  
10kV External SPD



THD<10%  
PF>0.95

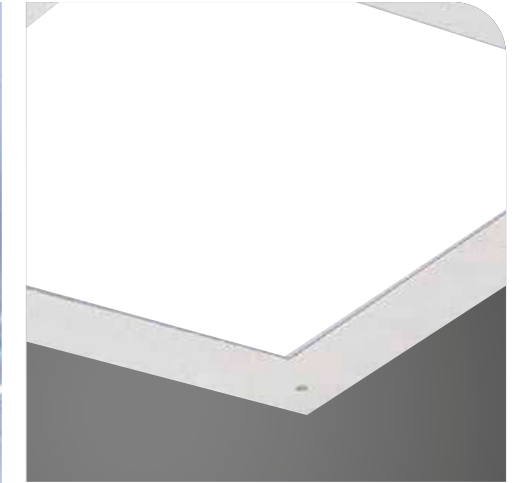

### Applications



Laboratory  
/OT




Food  
Processing



Pharmaceuticals

### Product Diagram

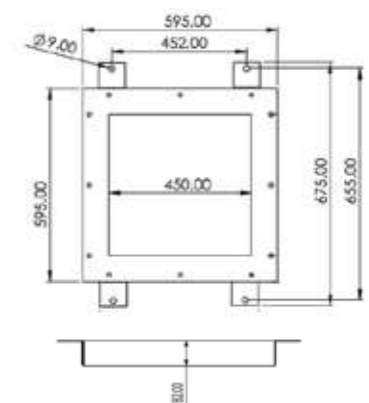

Dimension in mm

### Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to 50°C
Input Voltage Range	140 to 280 V AC

### Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions					
					A	B	C	D	E	F
36W	BPSF 36W WH LED	240	3600	0.17A	595	450	452	675	655	82
45W	BPSF 45W WH LED	240	4500	0.22A	595	450	452	675	655	82



# METRO LIGHTING

Ensuring a balance between functionality and aesthetics, metro station lighting plays a pivotal role in creating a safe and welcoming environment for commuters. From well-lit platforms to accentuating architectural features with strategic lighting design, every aspect is meticulously planned. Energy efficiency is a priority, with LED fixtures and motion sensors contributing to sustainability. Accessibility is key, with uniform lighting levels aiding passengers of all abilities. Safety measures include adequate CCTV lighting and prominently lit emergency call boxes.

# METROLITE

Trunk mounted Linear industrial batten –  
Specially designed for Metro and Railway projects



### Superior & appealing aesthetics

Extruded Aluminium Housing with Polycarbonate Opal diffuser. Luminaire is mounted on trunk made of extruded aluminium with end caps of engineering plastic



### Best in Class System Efficacy

140lm/w, ensures highest energy saving




### Uniform Distribution

Polycarbonate Opal diffuser for uniform light distribution



### High Performance Driver

Constant current integral LED driver is provided, having open/short circuit protection and built-in surge protection



IP54

Ingress Protection



3KV

Internal Surge Protection



THD<10%

PF>0.95

**SYNCHRONOUS**  
ENABLED



## Applications




Metro Station



Corridors

## Product Diagram

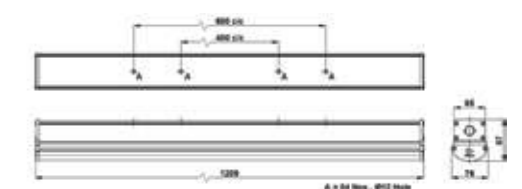

Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>80
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	0°C to +40°C
Input Voltage Range	150 to 270 V AC

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions		
					A	B	C
28W	BLTMO T 40L LED WH SY PC SD	240	4000	0.12A	1209	65	87
45W	BLTMO T 58L LED WH SY PC SD	240	5850	0.22A	1209	65	87



# INDUSTRIAL FLAMEPROOF

Luminaires Designed for  
Hazardous Environment.

In environments where the combination of flammable gases and ignition sources can lead to dangerous conditions, standard lighting solutions fall short. Hazardous area lighting solutions are specifically engineered to meet the unique requirements of these high-risk environments.

# FLAMEPROOF WELLGLASS

Wellglass suitable for Hazardous Area application in Gas group IIC environments. Approved by CIMFR and PESO.



**Superior & appealing aesthetics**  
Powder coated aluminium die-cast housing



**Loop in Loop out enabled with M20 Gland**  
For ease of installation & maintenance



**High Performance Driver**  
Constant current integral LED Driver is provided, having open/short circuit protection and Built-in surge protection



**IP66**  
Ingress Protection



**4kV**  
Internal Surge Protection -  
10kV External SPD



THD<10%  
PF>0.95



## Applications



Coal



Cement  
Factory




Refineries



Petrochemical  
Industry

## Product Diagram

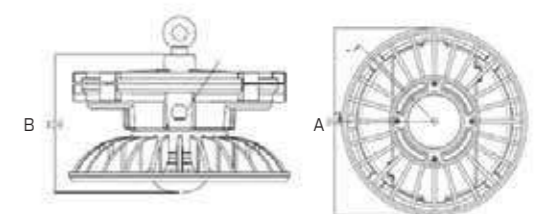

Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to +40°C
Input Voltage Range	140 to 270 V AC

(Suitable for Zone 1 & 2 and Gas group 2C. CIMFR Certificate no. - IN/CIMFR/TR23/P/2884)

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
30W	BIFPWG 30W CLED SD	240	3000	0.15A	Ø260	150
45W	BIFPWG 45W CLED SD	240	4500	0.21A	Ø260	150
70W	BIFPWG 70W CLED SD	240	7000	0.36A	Ø260	150

# FLAMEPROOF HIGHBAY

Highbay luminaires suitable for Hazardous Area application in Gas group IIC environments. Approved by CIMFR and PESO.



**Superior & appealing aesthetics**  
Powder coated aluminium die-cast housing



**Loop in Loop out enabled with M20 Gland**  
For ease of installation & maintenance



**High Performance Driver**  
Constant current integral LED Driver is provided, having open/short circuit protection and Built-in surge protection



**IP66**  
Ingress Protection




**4kV**  
Internal Surge Protection -  
10kV External SPD




THD<10%  
PF>0.95



## Applications

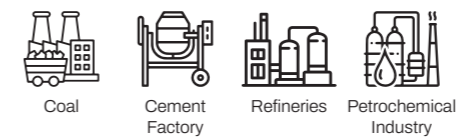

## Product Diagram

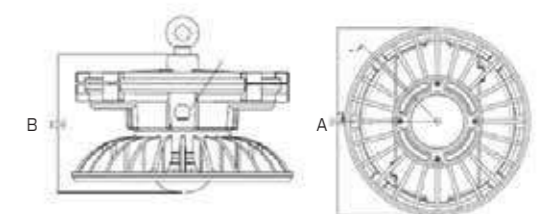

Dimension in mm

## Electrical Parameters

Correlated Color Temperature	5700K
Color Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature	-10°C to +40°C
Input Voltage Range	140 to 270 V AC


(Suitable for Zone 1 & 2 and Gas group 2C. CIMFR Certi No. - IN/CIMFR/TR23/P/3688)

## Specifications & Dimensions

Wattages	Product Description	Voltage	Lumen	System Current (Amp.)	Dimensions	
					A	B
100W	BIFPWG 100W CLED SD	240	10000	0.48A	Ø260	150
120W	BIFPWG 120W CLED SD	240	12000	0.57A	Ø260	150

# FLAMEPROOF LINEAR LUMINAIRE

Flameproof/weatherproof luminaire suitable for LED tube light fitting. Suitable for 2x18W LED lamp

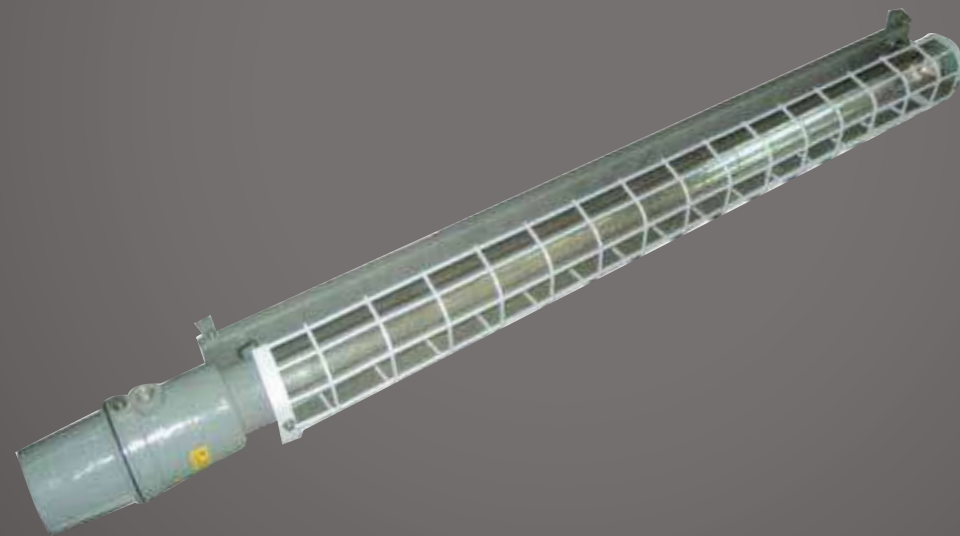

**IP60**  
Ingress  
Protection

## Applications




## Electrical Parameters

- Housing MATERIAL: Cast Aluminium LM 6
- GLASS: Heat-resistant tubular glass
- CABLE ENTRY: 2-way M20 x 1.5 pitch
- GASKET: Neoprene.
- Type of protection Ex 'd' GROUPS: II B Atmosphere only. ZONE – 1 & 2 CIMFR. CERT. No. : CIMFR/TC/P/934 Dated – 22nd Sept., 2014 (Cat. No. BJEXFTL 2x36) KARANDIKAR LAB TEST REPORT NO: KLPL/BTG/17/01-68 Did.-23/02/2017 (Suitable for 1/2 x 18W TUBE LIGHT) TEMP. CLASS: 1/2x18W LED – T6

## Specifications & Dimensions

Wattages	Product Description	Suitable for	Dimensions		
			A	B	C
18W	BJEXFTL 118W LED	1 x 18 W LED Tube	1485	125	165
36W	BJEXFTL 218W LED	2 x 18 W LED Tube	1485	268	165

## Product Diagram

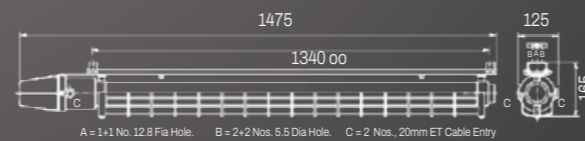

Dimension in mm





**Electricals**

27th Floor, One Unity Center (Erstwhile One International Center, Tower 4),  
Senapati Bapat Marg, Prabhadevi (West), Mumbai – 400013 | Tel.: 022-2406 4400  
E-mail: [illumination@bajajelectricals.com](mailto:illumination@bajajelectricals.com) | [www.bajajelectricals.com](http://www.bajajelectricals.com)

---

[f /BajajElecBiz](#)   [X /BajajElecBiz](#)   [i /bajajelecbiz](#)   [in /BajajElectricals](#)

Images of the products shown are for representation purpose only  
and the actual colour/size may vary.