




Article no.	01 17 07828
Size in mm (W x H x D)	650 x 550 x 250 mm
Material	Fiberglass reinforced polyester (FRP/GRP) with 25% GF
Weight	9.05 Kg
Thickness	3.5 mm
In accordance with	IEC 62208, RoHS, CE & UL



### Detail Mass Drawing

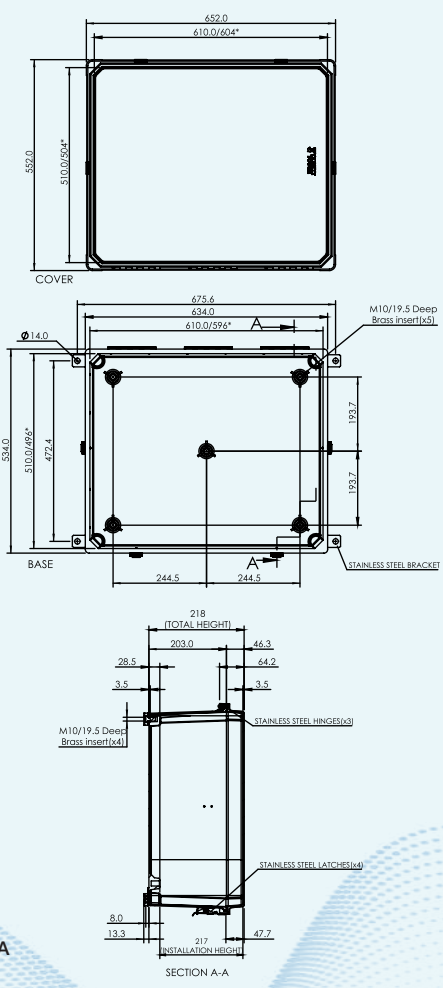

### Technical Data

Ingress protection (EN 60529)	IP 67
Impact resistance (EN 62262)	IK 10
Glow wire test	960°C
Non-toxicity	Halogen Free
UV Stabilised	Yes
Color	RAL 7035 - Grey
Gasket	VMQ-Silicone
Fire retardant & self extinguishing	UL 94 5VA
Cover Type	Opaque cover with captive stainless steel screws
Internal Hardware Used	304 stainless steel mounting brackets & latch.

### Accessories

Mounting Plates Galvanised Iron (GI)	39912418
Mounting Plate Bakelite	39910658
Mounting Plates FRP	39910659
Mounting Foot	11709955
Venting Element	11710512
Combiner	11710516



**Trinity Touch Pvt. Ltd.**  
[www.trinitytouch.com](http://www.trinitytouch.com)  
**INDIA**  
**Delhi: Corporate Office**  
 D-10, Defence Colony, New Delhi 110024 INDIA  
 Tel: +91.11.71200900  
 Fax: +91.11.71200998  
 E-mail: [postmaster@trinitytouch.com](mailto:postmaster@trinitytouch.com)

**Trinity Touch (EUROPE) Ltd.**  
[www.trinitytouch.co.uk](http://www.trinitytouch.co.uk)  
**UK**  
 Unit-L, Tyson Courtyard, Weldon South Industrial Estate, Corby, Northants, N N18 8AZ, UK  
 Tel: +44 (0) 1536 400 641  
 Fax: +44 (0) 1536 268 043  
 E-mail: [gbsales@trinitytouch.com](mailto:gbsales@trinitytouch.com)