



ELECTRICAL MEASUREMENT

Multifunction Meters
Energy Meters
Digital Panel Meters
Current Transformers

POWER QUALITY

Automatic Power Factor Controllers
Thyristor Switching Modules
Capacitors / Detuned Reactors
Advanced Static VAR Generators
Active Harmonic Filters
Power Quality Hybrid Solutions

ELECTRICAL PROTECTION & CONTROL

Line Monitoring Relays
Current Monitoring Relays
Motor & Pump Protection Relays
Time Switches
Analog Timers

SOLAR INVERTERS

PRICE LIST 2026

(With effect from April 6th, 2026)

ELECTRICAL MEASUREMENT

Page

- Multifunction Meters 4
- Plug-N-Wire Multifunction Meters 7
- Energy Meters 8
- Energy-Management Softwares and Communication Gateways 11
- Digital Panel Meters 11
- Current Transformers 13

POWER QUALITY

Page

- Automatic Power Factor Controllers 19
- Thyristor Switching Modules 19
- Capacitors / Detuned Reactors 20
- Advanced Static VAr Generator / Active Harmonic Filter 22
- Power Quality Hybrid Solution 24

ELECTRICAL PROTECTION & CONTROL

Page

- Line Monitoring Series 27
- Current Monitoring Series 29
- Time Switch & Analog Timers 32

SOLAR INVERTERS

Page

- Solar On Grid Inverter 34

NEW

MULTIFUNCTION METER

SELEC[®]



Pluggable Modules

- ▶ 2DI + 4RO

MFM386

- ▶ Ethernet & RS485 Communication
- ▶ Accuracy Class 0.2S
- ▶ Data Logging
- ▶ In-Built 2DI, 2DO, RTD
- ▶ % THD Up to 40th Harmonics

www.selec.com

NEW

MULTIFUNCTION METER

selec[®]



MFM384+

- ▶ Accuracy class 0.5S
- ▶ DI & RTC (Year/ Date/ Hour)
- ▶ True, Displacement, Distortion PF
- ▶ Demand parameters (Last, Present, Predictive, Peak)

MFM376+

- ▶ Accuracy class 0.5S / class 1
- ▶ Variant with DI-RS485 / POP-RS485
- ▶ True, Displacement PF

www.selec.com


MULTIFUNCTION METERS

New

New




LCD MULTIFUNCTION METER

- Energy Standard - Class 0.2S, 0.5S & Class 1 as per IEC 62053-22 / 21
- Multifunction parameter monitoring (V, A, PF, Hz, W, Wh, VA, VAh, VARh)
- Max Demand & Import / Export measurement
- %THD & Individual harmonics for V & I up to 40th level over communication
- Ethernet & RS485 Communication supported by MODBUS RTU & TCP / IP Protocol
- Pulse output
- 

Product Code	Description	HSN Code	Unit MRP
LCD MULTIFUNCTION METER			
MFM386-E-CE-CL02 <i>New</i>	LCD, High-end multifunction meter with Ethernet & RS485 communication, Accuracy Class 0.2S, Datalogging, Inbuilt 2 DI, 2DO & RTD, Displacement PF, Time-stamped measurements, %THD up to 40 th level, 40 to 300V AC / DC	90303390	21711
MFM386-C-CE-CL02 <i>New</i>	LCD, High-end multifunction meter with RS485 communication, Accuracy Class 0.2S, Datalogging, Inbuilt 2 DI, 2DO & RTD, Displacement PF, Time-stamped measurements, %THD up to 40 th level, 40 to 300V AC / DC		15921
MFM384-C-D-CE-CL05-Plus <i>New</i>	LCD, High-end multifunction meter with RS485 communication, Dual source, Accuracy Class 0.5S, Time-stamped measurements, Displacement PF, Unbalance current & voltage, Configurable Favourite Page, %THD up to 31 st level, 40 to 300V AC / DC		10989
MFM384-C-CE-CL05	LCD multifunction meter with RS485 communication, %THD up to 31 st level, Displacement PF, 40 to 300V AC / DC, Accuracy Class 0.5S		10134
MFM384-C-CE * #	LCD multifunction meter with RS485 communication, %THD up to 31 st level, 40 to 300V AC / DC		8449
MFM384-R-C-CE #	Rail mount LCD multifunction meter with RS485 communication, %THD up to 31 st level, 85 to 270V AC		8449
MFM383A-C-CE	LCD multifunction meter with RS485 communication, %THD up to 31 st level, 40 to 300V AC / DC		6758
MFM383A-CE	LCD multifunction meter, 40 to 300V AC / DC		5745
ACCESSORIES - MFM386			
MFMA-SC-DI02-RO04 <i>New</i>	Pluggable module with 2 Digital Inputs and 4 Relay Outputs (To use MFM386 as demand controller)	90303390	2070

LED MULTIFUNCTION METER



- Energy Standard - Class 0.5S & Class 1 as per IEC 62053-22 / 21
- Multifunction parameter monitoring (V, A, PF, Hz, W, Wh, VA, VAh, VARh)
- Max Demand & Import / Export measurement
- %THD & Individual harmonics for V & I up to 31st level over communication
- RS485 Communication MODBUS RTU Protocol
- Pulse output
- 

Product Code	Description	HSN Code	Unit MRP
LED MULTIFUNCTION METER			
MFM376-C-D-CE-CL05-Plus <i>New</i>	LED, High end multifunction meter with RS485 communication, Dual source, Accuracy Class 0.5S, Displacement PF, Unbalance current & voltage, Configurable Favourite Page, %THD up to 31 st level, 40 to 300V AC / DC	90303390	7339
MFM376-C-CE	LED multifunction meter with RS485 communication, %THD up to 31 st level, 40 to 300V AC / DC		6082
MFM376-CE	LED multifunction meter with Import / Export energy measurement, 40 to 300V AC / DC		4478

Note: * UL variant available # MID variant available

Price list 2026 (w.e.f. April 6th, 2026)

PLUG-N-WIRE MULTIFUNCTION METER



PLUG-N-WIRE MULTIFUNCTION METER

- Energy Standard - Class 1 as per IEC 62053-21
- Single and Three phase network compatible, Self-Powered
- RJ45 connector, 330mV output
- Safe to leave transformers on load with output disconnected
- Available as 1 / 2 / 4 channel system, Rail / Panel mount option
- Supplied with or without cables, Accessories available to suit requirements
- RS485 Communication MODBUS RTU Protocol
- CE RoHS

Product Code	Description	HSN Code	Unit MRP
PLUG-N-WIRE METER - TIME-SAVING SOLUTION			
MRJ4M-QUAD	Rail mount LCD Plug-N-Wire multifunction meter with RJ45 current input, 4 load monitoring and RS485 communication, 60 to 300V AC	90303390	14672
MRJ4M-SL #	Rail mount LCD Plug-N-Wire multifunction meter with RJ45 current input, Dual load monitoring and RS485 communication, 60 to 300V AC		10458
MRJ4M #	Rail mount LCD Plug-N-Wire multifunction meter with RJ45 current input and RS485 communication, 60 to 300V AC		8664
MRJ385-G-PNW #	LCD Plug-N-Wire multifunction meter with RJ45 current input, %THD up to 31 st level, RS485 communication, 100 to 240V AC		9214
ACCESSORIES - PLUG-N-WIRE			
POWER & COMMUNICATION CABLE			
PWCBL_CON-M/F-1	Daisy chain cable to loop MRJ meters with Male & Female type connectors, 1 Meter length	85444299	680
PWCBL_CON-M/F-3	Daisy chain cable to loop MRJ meters with Male & Female type connectors, 3 Meter length		1245
ACH-003	Cable to connect MRJ Meter with PWCT / PLCT – Both sides RJ45 (8Pin)		641
ACH-004	RS485 communication for MRJ4M-QUAD - Both sides RJ25 (6Pin)		579
CURRENT TRANSFORMERS & CONVERTERS			
CTV CONVERTER 1A/330 mV	Converter used with PLCTs for MRJ multifunction meter series	85043100	1286
PWADP-1A	1A adapter to use with conventional CT for MRJ4M-QUAD meter		1047
PWADP-5A	5A adapter to use with conventional CT for MRJ4M, MRJ4M-SL & MRJ385-G-PNW		1047
PLCT 21/25 250 /1A VA 3 CL 0.5	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1960
PLCT 21/25 200 /1A VA 3 CL 0.5	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1807
PLCT 21/25 160 /1A VA 2.5 CL 0.5	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1691
PLCT 21/25 150 /1A VA 2.5 CL 0.5	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1658
PLCT 21/25 125 /1A VA 1.5 CL 1	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1610
PLCT 21/25 100 /1A VA 1 CL 3	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1552
PLCT 21/25 60 /1A VA 1 CL 3	Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter		1475
PWCT-31/31-630A/330mV	630A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size)		5509
PWCT-31/31-600A/330mV	600A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size)		5509
PWCT-31/31-400A/330mV	400A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size)		5509
PWCT-31/31-250A/330mV	250A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size)		5509
PWCT-54/50-1600A/330mV	1600A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size)		9206
PWCT-54/50-1250A/330mV	1250A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size)		9206
PWCT-54/50-1000A/330mV	1000A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size)		9206
PWCT-54/50-800A/330mV	800A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size)		9206

Note: # MID variant available

Price list 2026 (w.e.f. April 6th, 2026)

ENERGY METERS



DIRECT MEASURING ENERGY METER

- Energy Standard - Class 1.0 as per IEC 62053-21
- Direct measuring up to 100A
- Multifunction parameter monitoring (V, A, PF, Hz, W, Wh, VA, VAh, VARh, Max Demand & Import / Export Energy)
- Protocols available : MODBUS RTU variants
- MQTT variant (Wi-Fi)

Product Code	Description	HSN Code	Unit MRP
DIRECT MEASURING ENERGY METER			
EM4M-3P-W-100A <i>New</i>	3Ø Direct 100A kWh meter, 85 to 285V AC (L-N), 154 to 494V AC (L-L) with built-in Wi-Fi, MQTT protocol	90303390	11827
EM4M-3P-C-100A	3Ø Direct 100A kWh meter, Self-powered, 85 to 285V AC (L-N), 154 to 494V AC (L-L) with Dual source, 2 Pulse outputs & RS485 communication		9364
EMAC4M-3P-C-100A <i>New</i>	3Ø Direct 100A kWh meter, Self-powered, 85 to 285V AC (L-N), 154 to 494V AC (L-L) with RS485 communication		7651
EM2M-1P-W-100A <i>New</i>	1Ø Direct 100A kWh meter, Self-powered, 184 to 276V AC with built-in Wi-Fi, MQTT protocol		5123
EM2M-1P-C-100A #	1Ø Direct 100A kWh meter, Self-powered, 184 to 276V AC with RS485 communication		3792
EM2M-1P-C-63A <i>New</i>	1Ø Direct 63A kWh meter, Self powered, 184 to 276V AC with RS485 communication		3223



CT OPERATED ENERGY METER

- Energy Standard - Class 1.0 as per IEC 62053-21
- Bright LED / LCD Displays
- RS485 Communication MODBUS RTU Protocol
- Pulse output (EM368-C-CE, EM306)
-

Product Code	Description	HSN Code	Unit MRP
CT OPERATED ENERGY METER			
EM369-C-D-CE-CL05 <i>New</i>	3Ø LCD kWh meter with 9 Digits, Accuracy class 0.5S, Dual Source and RS485 communication, 40 to 300V AC / DC	90283010	6368
EM306-C-CE <i>New</i>	3Ø LED kWh meter with 9 Digits display, RS485 communication, 40 to 300V AC / DC		3647



DC ENERGY METER

Product Code	Description	HSN Code	Unit MRP
EMDC2M-1CH-C-1R0	Single channel, LED display, 1000V DC & 50mV to 100mV (shunt), Rs485 communication & Relay output	90283090	5946

Note: # MID variant available



- ▶ Customized widget based dashboard & reports
- ▶ Compatibility with third-party devices
- ▶ Data monitoring & real-time control
- ▶ Energy usage analysis



PRICE ON REQUEST

Energy Management

Analytics

Dashboards

Alarms

Control

- Installed At:**
- ▶ Cement Industry
 - ▶ Education Institutes (Universities)
 - ▶ Defence Sectors
 - ▶ FMCG Companies
 - ▶ Textile & Automobile Industry
 - ▶ Food Processing Industry

Product Code	Description	HSN Code	Unit MRP
ENERGY MANAGEMENT SOFTWARE			
SELCOM	Front - End Software of Meters of Communication Type (Desktop based)	85238020	On Request
COMMUNICATION GATEWAYS			
AC-S2E-02	Converter – RS485 to Ethernet	84715000	6504
AC-USB-RS485-02	Converter Cable – USB to RS485 (2 wire)		4195
AC-S2W-01 <i>New</i>	Converter – RS485 to WiFi		3995

DIGITAL PANEL METERS



DIGITAL PANEL METER - MULTIFUNCTION SERIES

- True RMS measurement of V, A, W, PF & Hz
- 1Ø & 3Ø measurement available with LCD and LED display
- Models available with Built-in CT for 10A, 30A and 80A measurement
- RS485 MODBUS communication with alarm relay (MX300-1-C-CE)
-

Product Code	Description	HSN Code	Unit MRP
DIGITAL PANEL METER - MULTIFUNCTION SERIES			
VAF39A <i>New</i>	3Ø Digital meter with LED display, measuring Voltage, Current, Frequency, Power and Power Factor(VAF with Power & Power factor), 40 to 300V AC/DC, 96 x 96 mm size	90303310	2244
VAF391	3Ø Digital meter with LED display, measuring Voltage, Current, Frequency, Power and Power Factor(VAF with Power & Power factor), 96 x 96 mm size		2110
MX300-1-C-CE	1Ø Multifunction digital panel meter with 1 Alarm Relay output and RS485 MODBUS Communication, 96 x 96 mm size		2409
MVA591-30A-230V-CE	1Ø VA meter with measurement up to 30A with built-in CT, 48 x 48 mm size		1331



DIGITAL PANEL METER - VOLTMETER

- Class 0.5 accuracy
- True RMS voltage measurement
- Available in LCD and LED display
- Analog style bar graph model available
- PT programmable (For three phase variant)
-

Product Code	Description	HSN Code	Unit MRP
DIGITAL PANEL METERS- VOLTMETER			
MV2307-230V-CE	3Ø Digital voltmeter with LCD, Bar graph representation for voltage, 230V AC, 72 x 72 mm size	90303310	2181
MV507-230V-CE *	1Ø Digital voltmeter with LCD display, Bar graph representation for voltage, 230V AC, 48 x 48 mm size		1980
MV353-40/300V-CE <i>New</i>	3-Line Digital voltmeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size		1954
MV35-3-G-40/300V-CE	3Ø Digital voltmeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size		1635
MV35-1-G-40/300V-CE	1Ø Digital voltmeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size		1128
MV15 *	1Ø Digital voltmeter with LED display, 230V AC, 48 x 96 mm size		930
MV205	1Ø Digital voltmeter with LED display, 230V AC, 72 x 72 mm size		930
MV305	1Ø Digital voltmeter with LED display, 230V AC, 96 x 96 mm size		930

Note: * UL variant available

Price list 2026 (w.e.f. April 6th, 2026)



DIGITAL PANEL METER - AMMETER



- Class 0.5 accuracy
- True RMS current measurement
- Available in LCD and LED display
- Analog style bar graph model available
- CT programmable
- CE RoHS

Product Code	Description	HSN Code	Unit MRP
DIGITAL PANEL METERS- AMMETER			
MA2301-230V-CE	3Ø Digital ammeter with LCD, Bar graph representation for current, 230V AC, 72 x 72 mm size	90303310	2275
MA323-40/300V-CE <i>New</i>	3-Line Digital ammeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size		2170
MA32-3-G-40/300V-CE	3Ø Digital ammeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size		1849
MA335-230VAC	3Ø Digital ammeter with LED display, 230V AC, 96 x 96 mm size		1681
MA501-CU	1Ø Digital ammeter with LCD, Bar graph representation for current, 230V AC, 48 x 48 mm size		2553
MA12-20A-AC	1Ø Digital ammeter with LED display, 20A direct input, 230V AC, 48 x 96 mm size		1516
MA32-1-G-40/300V-CE	1Ø Digital ammeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size		1128
MA12 *	1Ø Digital ammeter with LED display, 230V AC, 48 x 96 mm size		892
MA202	1Ø Digital ammeter with LED Display, 230V AC, 72 x 72 mm size		892
MA302	1Ø Digital ammeter with LED display, 230V AC, 96 x 96 mm size		892

CURRENT TRANSFORMERS



CURRENT TRANSFORMERS - SPLIT CORE

- Protection against unauthorized manipulation of the connections by means of sealable covers
- Nominal Rating ranges from 100A to 6000A
- Snap closing / opening feature
- Non Flammable and self extinguishing.
- Mounting types: Busbar
-  




Product Code	Description	HSN Code	Unit MRP
CURRENT TRANSFORMERS - SPLIT CORE			
SCCT-30/20-100/5A-VA1-CL1-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 100/5A, Accuracy class 1	85043100	3545
SCCT-30/20-100/5A-VA1.5-CL3-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 100/5A, Accuracy class 3		3545
SCCT-30/20-150/5A-VA1-CL0.5-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 150/5A, Accuracy class 0.5		3545
SCCT-30/20-150/5A-VA1.5-CL3-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 150/5A, Accuracy class 3		3545
SCCT-30/20-200/5A-VA1-CL0.5-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 200/5A, Accuracy class 0.5		3545
SCCT-30/20-200/5A-VA1.5-CL1-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 200/5A, Accuracy class 1		3545
SCCT-30/20-200/5A-VA2.5-CL3-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 200/5A, Accuracy class 3		3545
SCCT-30/20-250/5A-VA1.5-CL0.5-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 0.5		3545
SCCT-30/20-250/5A-VA2.5-CL1-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 1		3545
SCCT-30/20-250/5A-VA3.75-CL3-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 3		3545
SCCT-30/20-300/5A-VA2.5-CL0.5-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 300/5A, Accuracy class 0.5		3545
SCCT-30/20-300/5A-VA3.75-CL1-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 300/5A, Accuracy class 1		3545
SCCT-30/20-300/5A-VA5-CL3-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 300/5A, Accuracy class 3		3545
SCCT-30/20-400/5A-VA2.5-CL0.5-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 400/5A, Accuracy class 0.5		3545
SCCT-30/20-400/5A-VA5-CL1-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 400/5A, Accuracy class 1		3545
SCCT-30/20-400/5A-VA10-CL3-CE	Split core current transformer. Inner dimensions: 30/20, Rating: 400/5A, Accuracy class 3		3545
SCCT-80/50-250/5A-VA1-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 250/5A, Accuracy class 0.5		4287
SCCT-80/50-250/5A-VA2.5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 250/5A, Accuracy class 1		4287
SCCT-80/50-250/5A-VA3.75-CL3-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 250/5A, Accuracy class 3		4287
SCCT-80/50-300/5A-VA1.5-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 300/5A, Accuracy class 0.5		4287
SCCT-80/50-300/5A-VA2.5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 300/5A, Accuracy class 1		4287
SCCT-80/50-300/5A-VA5-CL3-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 300/5A, Accuracy class 3		4287
SCCT-80/50-400/5A-VA1.5-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 400/5A, Accuracy class 0.5		4287
SCCT-80/50-400/5A-VA2.5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 400/5A, Accuracy class 1		4287
SCCT-80/50-400/5A-VA10-CL3-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 400/5A, Accuracy class 3		4287
SCCT-80/50-500/5A-VA2.5-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 500/5A, Accuracy class 0.5		4287
SCCT-80/50-500/5A-VA5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 500/5A, Accuracy class 1		4287
SCCT-80/50-600/5A-VA2.5-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 600/5A, Accuracy class 0.5		4287
SCCT-80/50-600/5A-VA5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 600/5A, Accuracy class 1		4287
SCCT-80/50-600/5A-VA15-CL3-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 600/5A, Accuracy class 3		4287
SCCT-80/50-750/5A-VA2.5-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 750/5A, Accuracy class 0.5		4287
SCCT-80/50-750/5A-VA7.5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 750/5A, Accuracy class 1		4287
SCCT-80/50-750/5A-VA20-CL3-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 750/5A, Accuracy class 3		4287
SCCT-80/50-800/5A-VA2.5-CL0.5-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 800/5A, Accuracy class 0.5		4287
SCCT-80/50-800/5A-VA7.5-CL1-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 800/5A, Accuracy class 1		4287
SCCT-80/50-800/5A-VA20-CL3-CE	Split core current transformer. Inner dimensions: 80/50, Rating: 800/5A, Accuracy class 3		4287

Price list 2026 (w.e.f. April 6th, 2026)

Product Code	Description	HSN Code	Unit MRP
SCCT-160/80-4000/5A-VA30-CL3-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 4000/5A, Accuracy class 3	85043100	12628
SCCT-160/80-5000/5A-VA15-CL0.5-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 5000/5A, Accuracy class 0.5		12628
SCCT-160/80-5000/5A-VA20-CL1-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 5000/5A, Accuracy class 1		12628
SCCT-160/80-5000/5A-VA30-CL3-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 5000/5A, Accuracy class 3		12628
SCCT-160/80-6000/5A-VA15-CL0.5-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 6000/5A, Accuracy class 0.5		12628
SCCT-160/80-6000/5A-VA20-CL1-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 6000/5A, Accuracy class 1		12628
SCCT-160/80-6000/5A-VA30-CL3-CE	Split core current transformer. Inner dimensions: 160/80, Rating: 6000/5A, Accuracy class 3		12628



CURRENT TRANSFORMER - SQUARE TYPE

- Available range: 30A - 4000A
- ASTA, CE and UL certified
- Applicable with bus bar aperture upto 100mm
- Panel mount / Din rail mount (Requires additional accessory)
-   

Product Code	Description	HSN Code	Unit MRP
CURRENT TRANSFORMER - SQUARE TYPE			
SPCT-50/30-30/5A-VA1-(2T)-CL5-CE *	Bus bar CT with 30/5A, OD/ID: 50/30	85043100	469
SPCT-50/30-60/5A-VA1-CL5-CE *	Bus bar CT with 60/5A, OD/ID: 50/30		469
SPCT-50/30-75/5A-VA1-CL1-CE *	Bus bar CT with 75/5A, OD/ID: 50/30		472
SPCT-50/30-80/5A-VA1-CL1-CE *	Bus bar CT with 80/5A, OD/ID: 50/30		472
SPCT-50/30-100/5A-VA1-CL1-CE *	Bus bar CT with 100/5A, OD/ID: 50/30		478
SPCT-50/30-125/5A-VA1.25-CL1-CE *	Bus bar CT with 125/5A, OD/ID: 50/30		505
SPCT-50/30-160/5A-VA1.5-CL1-CE *	Bus bar CT with 160/5A, OD/ID: 50/30		511
SPCT-50/30-200/5A-VA3-CL1-CE *	Bus bar CT with 200/5A, OD/ID: 50/30		518
SPCT-50/30-250/5A-VA3-CL1-CE *	Bus bar CT with 250/5A, OD/ID: 50/30		554
SPCT-50/30-300/5A-VA5-CL1-CE *	Bus bar CT with 300/5A, OD/ID: 50/30		588
SPCT-50/30-400/5A-VA5-CL1-CE *	Bus bar CT with 400/5A, OD/ID: 50/30		605
SPCT-62/22-30/5A-VA1-CL5-CE *	Bus bar CT with 30/5A, OD/ID: 62/22		789
SPCT-62/30-50/5A-VA1-CL3-CE *	Bus bar CT with 50/5A, OD/ID: 62/30		714
SPCT-62/30-50/5A-VA1.5-CL3-CE *	Bus bar CT with 50/5A, OD/ID: 62/30		714
SPCT-62/30-75/5A-VA1-CL3-CE *	Bus bar CT with 75/5A, OD/ID: 62/30		777
SPCT-62/30-75/5A-VA3-CL3-CE *	Bus bar CT with 75/5A, OD/ID: 62/30		800
SPCT-62/30-100/5A-VA1-CL1-CE *	Bus bar CT with 100/5A, OD/ID: 62/30		755
SPCT-62/30-100/5A-VA3-CL1-CE *	Bus bar CT with 100/5A, OD/ID: 62/30		1133
SPCT-62/40-100/5A-VA1-CL1-CE *	Bus bar CT with 100/5A, OD/ID: 62/40		569
SPCT-62/40-125/5A-VA1-CL1-CE *	Bus bar CT with 125/5A, OD/ID: 62/40		598
SPCT-62/40-150/5A-VA1.5-CL1-CE *	Bus bar CT with 150/5A, OD/ID: 62/40		616
SPCT-62/40-160/5A-VA1.5-CL1-CE *	Bus bar CT with 160/5A, OD/ID: 62/40		622
SPCT-62/40-200/5A-VA2.5-CL0.5-CE *	Bus bar CT with 200/5A, OD/ID: 62/40		614
SPCT-62/40-200/5A-VA3-CL1-CE *	Bus bar CT with 200/5A, OD/ID: 62/40		677
SPCT-62/40-250/5A-VA2.5-CL0.5-CE *	Bus bar CT with 250/5A, OD/ID: 62/40		663
SPCT-62/40-250/5A-VA3-CL1-CE *	Bus bar CT with 250/5A, OD/ID: 62/40		664

Product Code	Description	HSN Code	Unit MRP
SPCT-62/40-300/5A-VA3-CL0.5-CE *	Bus bar CT with 300/5A, OD/ID: 62/40	85043100	664
SPCT-62/40-400/5A-VA3.75-CL0.5-CE *	Bus bar CT with 400/5A, OD/ID: 62/40		719
SPCT-62/40-400/5A-VA5-CL1-CE *	Bus bar CT with 400/5A, OD/ID: 62/40		719
SPCT-62/40-500/5A-VA5-CL1-CE	Bus bar CT with 500/5A, OD/ID: 62/40		717
SPCT-62/40-600/5A-VA5-CL1-CE	Bus bar CT with 600/5A, OD/ID: 62/40		780
SPCT-62/40-600/5A-VA7.5-CL1-CE	Bus bar CT with 600/5A, OD/ID: 62/40		864
SPCT-62/40-750/5A-VA5-CL1-CE	Bus bar CT with 750/5A, OD/ID: 62/40		1113
SPCT-100/60-500/5A-VA5-CL1-CE *	Bus bar CT with 500/5A, OD/ID: 100/60		1310
SPCT-100/60-600/5A-VA5-CL0.5-CE *	Bus bar CT with 600/5A, OD/ID: 100/60		1332
SPCT-100/60-600/5A-VA7.5-CL1-CE *	Bus bar CT with 600/5A, OD/ID: 100/60		1332
SPCT-100/60-630/5A-VA5-CL0.5-CE	Bus bar CT with 630/5A, OD/ID: 100/60		1361
SPCT-100/60-800/5A-VA10-CL0.5-CE *	Bus bar CT with 800/5A, OD/ID: 100/60		1515
SPCT-100/60-1000/5A-VA15-CL0.5-CE *	Bus bar CT with 1000/5A, OD/ID: 100/60		1766
SPCT-100/60-1200/5A-VA15-CL0.5-CE *	Bus bar CT with 1200/5A, OD/ID: 100/60		1990
SPCT-140/100-800/5A-VA15-CL0.5-CE	Bus bar CT with 800/5A, OD/ID: 140/100		1757
SPCT-140/100-1000/5A-VA15-CL0.5-CE	Bus bar CT with 1000/5A, OD/ID: 140/100		1890
SPCT-140/100-1200/5A-VA15-CL0.5-CE	Bus bar CT with 1200/5A, OD/ID: 140/100		2004
SPCT-140/100-1250/5A-VA15-CL0.5-CE	Bus bar CT with 1250/5A, OD/ID: 140/100		2016
SPCT-140/100-1500/5A-VA15-CL0.5-CE	Bus bar CT with 1500/5A, OD/ID: 140/100		2201
SPCT-140/100-1600/5A-VA15-CL0.5-CE	Bus bar CT with 1600/5A, OD/ID: 140/100		2195
SPCT-140/100-2000/5A-VA15-CL0.5-CE	Bus bar CT with 2000/5A, OD/ID: 140/100		2590
SPCT-140/100-2500/5A-VA15-CL0.5-CE	Bus bar CT with 2500/5A, OD/ID: 140/100		2848
SPCT-140/100-3000/5A-VA15-CL0.5-CE	Bus bar CT with 3000/5A, OD/ID: 140/100		3192
SPCT-140/100-3500/5A-VA15-CL0.5	Bus bar CT with 3500/5A, OD/ID: 140/100		3080
SPCT-140/100-4000/5A-VA15-CL0.5	Bus bar CT with 4000/5A, OD/ID: 140/100		3417

Accessory - Square type CT

AC-SPCT-DRAIL-01	Accessory - Din Rail mounting plate for Busbar CT, Qty 10 no's	39269099	900
AC-SPCT-50/30-DRAIL-01	Accessory - Din Rail mounting plate for 50/30 Busbar CT, Qty 10 no's	39269099	169



CURRENT TRANSFORMER - CABLE TYPE

- Available range: 30A - 600A
- Rated Burden: 1.5 /5VA
- Accuracy: Class 1 to 5
- Panel mount

Product Code	Description	HSN Code	Unit MRP
CURRENT TRANSFORMER - CABLE TYPE			
RCT-T-D30-30/5A-VA1.5-CL5	Ring type CT with 30/5A, Inner diameter - 30mm	85043100	807
RCT-T-D30-30/5A-VA5-(2T)-CL5	Ring type CT with 30/5A, Inner diameter - 30mm		807
RCT-T-D30-50/5A-VA5-CL5	Ring type CT with 50/5A, Inner diameter - 30mm		797
RCT-T-D30-75/5A-VA5-CL5	Ring type CT with 75/5A, Inner diameter - 30mm		843
RCT-T-D30-100/5A-VA5-CL1	Ring type CT with 100/5A, Inner diameter - 30mm		1052
RCT-T-D30-150/5A-VA5-CL1	Ring type CT with 150/5A, Inner diameter - 30mm		883
RCT-T-D50-200/5A-VA5-CL1	Ring type CT with 200/5A, Inner diameter - 50mm		764
RCT-T-D50-250/5A-VA5-CL1	Ring type CT with 250/5A, Inner diameter - 50mm		799
RCT-T-D50-300/5A-VA5-CL1	Ring type CT with 300/5A, Inner diameter - 50mm		823
RCT-T-D50-400/5A-VA5-CL1	Ring type CT with 400/5A, Inner diameter - 50mm		894
RCT-T-D50-500/5A-VA5-CL1	Ring type CT with 500/5A, Inner diameter - 50mm		954
RCT-T-D50-600/5A-VA5-CL1	Ring type CT with 600/5A, Inner diameter - 50mm		1066



CURRENT TRANSFORMER - TAPE WOUND

- Available range: 30A - 1600A
- Rated Burden: 1.5 /5/10VA
- Accuracy: Class 0.5 to 5

Product Code	Description	HSN Code	Unit MRP
CURRENT TRANSFORMER - TAPE WOUND			
TWCT-T-D35-30/5A-VA1.5-CL5	Tape wound CT with 30/5A, Inner diameter - 35mm	85043100	805
TWCT-T-D35-50/5A-VA5-CL5	Tape wound CT with 50/5A, Inner diameter - 35mm		794
TWCT-T-D35-75/5A-VA5-CL5	Tape wound CT with 75/5A, Inner diameter - 35mm		805
TWCT-T-D35-100/5A-VA5-CL1	Tape wound CT with 100/5A, Inner diameter - 35mm		950
TWCT-T-D35-150/5A-VA5-CL1	Tape wound CT with 150/5A, Inner diameter - 35mm		868
TWCT-T-D55-150/5A-VA5-CL1	Tape wound CT with 150/5A, Inner diameter - 55mm		659
TWCT-T-D55-200/5A-VA5-CL1	Tape wound CT with 200/5A, Inner diameter - 55mm		663
TWCT-T-D55-250/5A-VA5-CL1	Tape wound CT with 250/5A, Inner diameter - 55mm		695
TWCT-T-D55-300/5A-VA5-CL1	Tape wound CT with 300/5A, Inner diameter - 55mm		768
TWCT-T-D55-400/5A-VA5-CL1	Tape wound CT with 400/5A, Inner diameter - 55mm		853
TWCT-T-D65-500/5A-VA5-CL1	Tape wound CT with 500/5A, Inner diameter - 65mm		816
TWCT-T-D65-600/5A-VA5-CL1	Tape wound CT with 600/5A, Inner diameter - 65mm		838
TWCT-T-D110-800/5A-VA10-CL0.5	Tape wound CT with 800/5A, Inner diameter - 110mm		1222
TWCT-T-D110-1000/5A-VA10-CL0.5	Tape wound CT with 1000/5A, Inner diameter - 110mm		1247
TWCT-T-D120-1000/5A-VA10-CL0.5	Tape wound CT with 1000/5A, Inner diameter - 120mm		1302
TWCT-T-D120-1200/5A-VA10-CL0.5	Tape wound CT with 1200/5A, Inner diameter - 120mm		1449
TWCT-T-D120-1600/5A-VA10-CL0.5	Tape wound CT with 1600/5A, Inner diameter - 120mm		1803

POWER QUALITY



ASVG / AHF

+



Capacitors & APFC



- Automatic Power Factor Controller
- Advanced Static VAr Generator
- Power Quality Hybrid Solution
- Thyristor Switching Modules
- Detuned Reactors
- Capacitors

AUTOMATIC POWER FACTOR CONTROLLERS



AUTOMATIC POWER FACTOR CONTROLLER

- Single CT and 3 CT variants available
- Available with four quadrant power factor controller
- Automatic sensing of capacitor bank values
- programmable up to 1 to 8/12 stages
- Variant available with no programming & built-in VAF meter
- RS485 Communication MODBUS RTU protocol (optional)
- CE RoHS

Product Code	Description	HSN Code	Unit MRP
AUTOMATIC POWER FACTOR CONTROLLER			
APFC148-T-312-C-90/550V-CE	Power factor controller with 3CT, 12 Stage Transistor output, LCD Display, 90 to 550V AC, 144 x 144 mm size	90328910	14402
APFC148-312-90/550V-CE	Power factor controller with 3CT, 12 Stage, LCD Display, 90 to 550V AC, 144 x 144 mm size		14402
APFC147-112-90/550V-CE	Power factor controller with 1CT, 12 Stage, LED Display, 90 to 550V AC, 144 x 144 mm size		10222
APFC147-108-90/550V-CE	Power factor controller with 1CT, 8 Stage, LED Display, 90 to 550V AC, 144 x 144 mm size		8870
APFC146-112-90/550V-CE	Power factor controller with 1CT, 12 Stage, LCD Display, 90 to 550V AC, 144 x 144 mm size		9105
APFC346-108-230V-CE	Power factor controller with 1CT, 8 Stage, LCD Display, 85 to 270V AC, 96 x 96 mm size		6621
APFC347-108-230V-CE	Power factor controller with 1CT, 8 Stage, LED Display, 85 to 270V AC, 96 x 96 mm size		6621

THYRISTOR SWITCHING MODULE



- No switching noise
- +24VDC as trigger input
- Adaptive control to suit high harmonics
- Compact design
- LED indicators
- Naturally cooled design upto 50kVAR
- No auxiliary voltage required upto 50kVAR

Product Code	Description	HSN Code	Unit MRP
Thyristor Switching Module			
TSM-2200-100	TSM, PIV of 2200V, 100 kVAR	85413010	On Request
TSM-2200-50	TSM, PIV of 2200V, 50 kVAR		
TSM-2200-25	TSM, PIV of 2200V, 25 kVAR		
TSM-2200-10	TSM, PIV of 2200V, 10 kVAR		

CAPACITORS



- High pulse current withstand capability
- Over current 1.8 times capacity
- Self-Healing
- Over pressure disconnection
- Non-polluting & Environment Friendly
- Suitable for floor and pole mounting
- Polyurethane self extinguishing resin V0 developed under standard UL 94
- Fireproof

Product Code	Description	HSN Code	Unit MRP
HEAVY DUTY CAPACITORS			
HDCAP25440	Heavy duty capacitor, 25.0 kVAr, 440V	85321000	On Request
HDCAP20440	Heavy duty capacitor, 20.0 kVAr, 440V		
HDCAP15440	Heavy duty capacitor, 15.0 kVAr, 440V		
HDCAP12440	Heavy duty capacitor, 12.0 kVAr, 440V		
HDCAP10440	Heavy duty capacitor, 10.0 kVAr, 440V		
HDCAP07440	Heavy duty capacitor, 7.5 kVAr, 440V		
HDCAP05440	Heavy duty capacitor, 5.0 kVAr, 440V		
HDCAP03440	Heavy duty capacitor, 3.0 kVAr, 440V		
HDCAP02440	Heavy duty capacitor, 2.0 kVAr, 440V		
HDCAP01440	Heavy duty capacitor, 1.0 kVAr, 440V		
HDCAP25480	Heavy duty capacitor, 25.0 kVAr, 480V		
HDCAP20480	Heavy duty capacitor, 20.0 kVAr, 480V		
HDCAP15480	Heavy duty capacitor, 15.0 kVAr, 480V		
HDCAP10480	Heavy duty capacitor, 10.0 kVAr, 480V		
HDCAP05480	Heavy duty capacitor, 5.0 kVAr, 480V		
HDCAP33525 <i>New</i>	Heavy duty capacitor, 33.0 kVAr, 525V		
HDCAP25525	Heavy duty capacitor, 25.0 kVAr, 525V		
HDCAP20525	Heavy duty capacitor, 20.0 kVAr, 525V		
HDCAP15525	Heavy duty capacitor, 15.0 kVAr, 525V		
HDCAP10525	Heavy duty capacitor, 10.0 kVAr, 525V		
HDCAP05525	Heavy duty capacitor, 5.0 kVAr, 525V		

Note : Other sizes available on request

DETUNED REACTOR



Detuned Reactor


- Harmonic duty reactor with AL / CU winding
- High quality aluminum / copper
- Range : 1kVAr to 100kVAr
- Filtering factor : 5.67%, 7% & 14%
- Linearity : Available in 143% & 208%
- Protection : Temperature protection-NC contact

Product Code	Description	HSN Code	Unit MRP
DETUNED REACTOR			
DF-02-14-143-CU	Detuned Reactor, 02kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V	85042320	On Request
DF-03-14-143-CU	Detuned Reactor, 03kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-05-14-143-CU	Detuned Reactor, 05kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-010-14-143-CU	Detuned Reactor, 10kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		

Price list 2026 (w.e.f. April 6th, 2026)

Product Code	Description	HSN Code	Unit MRP
DETUNED REACTOR			
DF-012.5-14-143-CU	Detuned Reactor, 12.5kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V	85042320	On Request
DF-015-14-143-CU	Detuned Reactor, 15kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-020-14-143-CU	Detuned Reactor, 20kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-025-14-143-CU	Detuned Reactor, 25kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-030-14-143-CU	Detuned Reactor, 30kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-040-14-143-CU	Detuned Reactor, 40kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-050-14-143-CU	Detuned Reactor, 50kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-075-14-143-CU	Detuned Reactor, 75kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-0100-14-143-CU	Detuned Reactor, 100kvar, 14% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-05-7-143-CU	Detuned Reactor, 05kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-010-7-143-CU	Detuned Reactor, 10kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-012.5-7-143-CU	Detuned Reactor, 12kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-015-7-143-CU	Detuned Reactor, 15kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-020-7-143-CU	Detuned Reactor, 20kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-025-7-143-CU	Detuned Reactor, 25kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-030-7-143-CU	Detuned Reactor, 30kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-040-7-143-CU	Detuned Reactor, 40kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-050-7-143-CU	Detuned Reactor, 50kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-060-7-143-CU	Detuned Reactor, 60kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-075-7-143-CU	Detuned Reactor, 75kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-0100-7-143-CU	Detuned Reactor, 100kvar, 7% factor, 143% Linearity, CU, 400 / 415 / 440V		
DF-03-14-143-AL	Detuned Reactor, 03kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-05-14-143-AL	Detuned Reactor, 05kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-010-14-143-AL	Detuned Reactor, 10kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-012.5-14-143-AL	Detuned Reactor, 12.5kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-015-14-143-AL	Detuned Reactor, 15kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-020-14-143-AL	Detuned Reactor, 20kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-025-14-143-AL	Detuned Reactor, 25kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-030-14-143-AL	Detuned Reactor, 30kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-050-14-143-AL	Detuned Reactor, 50kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-075-14-143-AL	Detuned Reactor, 75kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-0100-14-143-AL	Detuned Reactor, 100kvar, 14% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-05-7-143-AL	Detuned Reactor, 05kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-010-7-143-AL	Detuned Reactor, 10kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-012.5-7-143-AL	Detuned Reactor, 12.5kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-015-7-143-AL	Detuned Reactor, 15kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-020-7-143-AL	Detuned Reactor, 20kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-025-7-143-AL	Detuned Reactor, 25kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-030-7-143-AL	Detuned Reactor, 30kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-040-7-143-AL	Detuned Reactor, 40kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-050-7-143-AL	Detuned Reactor, 50kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-060-7-143-AL	Detuned Reactor, 60kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-075-7-143-AL	Detuned Reactor, 75kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		
DF-0100-7-143-AL	Detuned Reactor, 100kvar, 7% factor, 143% Linearity, AL, 400 / 415 / 440V		

Detuned Reactor

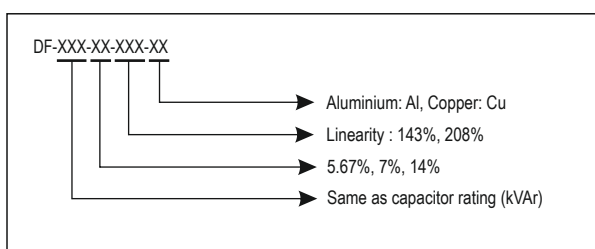

Note : 5.67% is available on request

Price list 2026 (w.e.f. April 6th, 2026)

ADVANCED STATIC VAR GENERATOR & ACTIVE HARMONIC FILTER

PRICE ON REQUEST

Solution to reduce kVAh units

ASVG

Power Factor > 0.99
Harmonic Mitigation up to 15th order

AHF

THD < 5%
Harmonic Mitigation up to 51st order



ASVG

- Available in 15kVAr, 30kVAr, 50kVAr, 100kVAr & 150kVAr
- Real-time, Dynamic step-less compensation
- Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- Advance feature- Harmonic correction up to 15th order
- Instant response time of 50 µsec & full response within 1 cycle
- Compensates current unbalance created by the load
- IGBT technology

AHF

- Available in 30A, 50A, 100A & 150A
- Real time, Dynamic step-less compensation
- Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- Instant response time of 50 µsec & full response within 1 cycle
- Compensates current unbalance created by the load
- IGBT technology

Ordering Information :

Product Code	Description	HSN Code	Unit MRP
ASVG-015-WLL-4P-00-8R	Advanced Static VAR Generator, 015kVAr, Wall Mounting, 3P-4W, with LCD Display	8504.40.10	On Request
ASVG-030-WLL-4P-04-B	Advanced Static VAR Generator, 030kVAr, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-030-WLL-4P-XX-B	Advanced Static VAR Generator, 030kVAr, Wall / Rack Mounting, 3P-4W, Without Display		
ASVG-030-RCK-4P-04-B	Advanced Static VAR Generator, 030kVAr, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-050-WLL-4P-XX-C	Advanced Static VAR Generator, 050kVAr, Wall / Rack Mounting, 3P-4W, Without Display		
ASVG-050-WLL-4P-04-C	Advanced Static VAR Generator, 050kVAr, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-050-RCK-4P-04-C	Advanced Static VAR Generator, 050kVAr, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-100-WLL-4P-XX-C	Advanced Static VAR Generator, 100kVAr, Wall / Rack Mounting, 3P-4W, Without Display		
ASVG-100-WLL-4P-04-C	Advanced Static VAR Generator, 100kVAr, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-100-RCK-4P-04-C	Advanced Static VAR Generator, 100kVAr, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-150-WLL-4P-XX-B	Advanced Static VAR Generator, 150kVAr, Wall / Rack Mounting, 3P-4W, Without Display		
ASVG-150-WLL-4P-04-B	Advanced Static VAR Generator, 150kVAr, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
ASVG-150-RCK-4P-04-B	Advanced Static VAR Generator, 150kVAr, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		

Product Code	Description	HSN Code	Unit MRP
AHF-030-WLL-4P-04-B	Active Harmonic Filter, 030A, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch	8504.40.10	On Request
AHF-030-WLL-4P-XX-B	Active Harmonic Filter, 030A, Wall / Rack Mounting, 3P-4W, Without Display		
AHF-030-RCK-4P-04-B	Active Harmonic Filter, 030A, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		
AHF-050-WLL-4P-XX-C	Active Harmonic Filter, 050A, Wall / Rack Mounting, 3P-4W, Without Display		
AHF-050-WLL-4P-04-C	Active Harmonic Filter, 050A, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
AHF-050-RCK-4P-04-C	Active Harmonic Filter, 050A, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		
AHF-100-WLL-4P-XX-C	Active Harmonic Filter, 100A, Wall / Rack Mounting, 3P-4W, Without Display		
AHF-100-WLL-4P-04-C	Active Harmonic Filter, 100A, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
AHF-100-RCK-4P-04-C	Active Harmonic Filter, 100A, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		
AHF-150-WLL-4P-XX-B	Active Harmonic Filter, 150A, Wall / Rack Mounting, 3P-4W, Without Display		
AHF-150-WLL-4P-04-B	Active Harmonic Filter, 150A, Wall Mounting, 3P-4W, with HMI Display 4.3 Inch		
AHF-150-RCK-4P-04-B	Active Harmonic Filter, 150A, Rack Mounting, 3P-4W, with HMI Display 4.3 Inch		

Ordering Information :

Product Type	Rating	Mounting Type	Type	Display	Colour
ASVG - Advanced Static Var Generator	15 / 30 / 50 / 100 / 150 (kVAr)	WLL - Wall Mount RCK - Rack Mount	3P-3W	04 - With HMI XX- Without HMI	B- Black
AHF - Active Harmonic Filter	30 / 50 / 100 / 150 (A)				

Example	Description	HSN Code	Unit MRP
ASVG-100-WLL-3P-XX-C	Advanced Static VAR Generator, 100kVAr, Wall / Rack Mounting, 3P-3W, Without Display	8504.40.10	On Request
AHF-050-RCK-3P-04-C	Active Harmonic Filter, 50A, Rack mounting, 3P-3W, with HMI display 4.3 Inch		
ASVG-150-WLL-3P-04-B	Advanced Static VAR Generator, 150kVAr, Wall Mounting, 3P-3W, With Display		

POWER QUALITY HYBRID SOLUTION

PRICE ON REQUEST



- Hybrid Solution – Combination of Step based and Stepless compensation
- Improved capacitor life due to minimum switching
- Instant response time of 50 μ sec & full response in less than 5 msec
- Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- Detuned reactor with every capacitor
- Advance feature- Harmonic correction up to 15th order with ASVG & 51th order with AHF
- Reputed make Switchgear
- Easy to expand using common controller
- 18-step relay output / Transistor output

HYBRID ORDER CODE :

Product Type	Rating	ASVG Rating	Capacitor Rating	Display
HYASVG-XXX-ASVGXXX-CAPXXX-07	150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 / 600 / 700 / 800	30 / 50 / 100 / 150	25	07- 7 INCH HMI

Note - Standard hybrid solution up to 800A/kVAr
Customised hybrid panels above 800A/kVAr

ACCESSORIES - COMMON CONTROLLER

Eg : HYHMI-7-18-S

Product Type	Product Series	Display Screen	Relay Output	Transistor Output	Communication
Common Controller	HYHMI	7"	18	---	S
			9	9	R / T
			---	18	T

ELECTRICAL PROTECTION & CONTROL

LINE MONITORING RELAYS



CURRENT PROTECTION RELAYS



EARTH LEAKAGE RELAYS



EARTH FAULT RELAYS



MOTOR PROTECTION RELAYS



PUMP PROTECTION RELAYS



DIGITAL TIME SWITCHES



TIME RELAYS



Protection Relays

SELEC[®]



VPRD-2

- ▶ Protects from :
 - Over / Under Voltage & Frequency
 - Phase Asymmetry, Phase Reversal and Phase loss
- ▶ Range : 280V - 520V L-L
- ▶ Works on 3P-3W & 3P-4W
- ▶ 2 Relay Output



600DVR

- ▶ Space Saving Design
- ▶ 1 Relay Output
- ▶ Programmable For Over / Under Voltage & Frequency Protection
- ▶ Phase Reversal, Phase Loss
- ▶ Neutral Loss

www.selec.com

LINE MONITORING SERIES



LINE MONITORING RELAYS

- 1Ø-2W, 3Ø-3W, 3Ø-4W suitable models
- Wide range of supply range available
- Neutral loss feature in selective model
- On-site field programmable trip and alarm relay
- Compact space-saving design
- Clear Trip indication on LED and LCD

Product Code	Description	HSN Code	Unit MRP
DIGITAL VOLTAGE PROTECTION RELAYS			
900VPR-BL-U-CE	3Ø-3W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, Neutral loss, 2 x 1C/O, 85 to 270V AC / DC Aux supply	85363000	4787
900VPR-2-280/600V-CE	3Ø-3W, 3Ø-4W, 1Ø-2W input, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, Neutral loss, 2 x 1 C/O, Self-powered		2730
VPRD2M-BL-CE	1Ø-2W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, With Backlight, 2 C/O DPDT		2540
VPRD-2-280/520V-CE	3Ø-3W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, 2 x 1 C/O, Self-powered		2459
600DVR-CE	3Ø-3W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, Neutral Loss, 1 C/O, Self powered		2248
ANALOG VOLTAGE PROTECTION RELAYS			
600VPR-310/520V-CE	3Ø-3W, Under / Over voltage, Phase failure, Phase sequence, 1C/O	85363000	2162
600VPR-1-130/320V-CE	1Ø-2W, Under / Over voltage, Phase failure, Phase sequence, 1C/O		1695
VPRA2M-CE	1Ø-2W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, 2 C/O DPDT		1939
PHASE SEQUENCE RELAYS			
600PSR-CE	3Ø-3W, Phase failure, Phase sequence, Phase asymmetry, 1 C/O, 17.5mm size	85363000	1439
640PSR-V-CE	3Ø-3W Phase Failure Relay with Phase asymmetry of 40V / 65V selectable, SPP / PSR selectable, Time delay for tripping, UV / OV -On/Off selectable, Multiple LEDs for Fault indication, 17.5mm Din Rail		1175
640PSR-CE	3Ø-3W Phase Failure Relay with Phase asymmetry of 40V. Multiple LED for Fault indication, 17.5mm Din Rail		1112
800PSR	3Ø-3W, Phase failure, Phase sequence, Phase asymmetry, 1 C/O, Multiple LED for Fault indication 22.5mm size		911
SINGLE PHASE PREVENTERS			
640SPP-CE	3Ø-3W, Phase failure, Phase asymmetry, 1 C/O	85363000	1112
SPPA2M2	3Ø-3W, Under / Over voltage, Phase failure, Phase asymmetry, 2 C/O DPDT		1734

Earth Leakage & Earth Fault

selec[®]



Earth Fault Relays

- ▶ Settable range : 10% to 80% of breaker rating
- ▶ Works with standard CT's of 5A*



Earth Leakage Relays

- ▶ 10mA - 30A
- ▶ CBCT open detection
- ▶ Tripping time < 30ms for 5X of set Current & < 50ms for 1X of set current



CBCT

- ▶ Nanocrystalline core for high sensitivity
- ▶ Size : 35/ 70/ 120/ 210/ 310

www.selec.com

Note : 5A CT can only be used with EFR-341

CURRENT MONITORING SERIES



CURRENT PROTECTION RELAYS

- Definite time tripping
- Wide tripping range (1 to 999A)
- Continuous monitoring of Over and Under current in 1 phase and 3 phase
- Wide supply range of supply: 85 to 270V AC/DC
- Field programmable trip current and trip time through keys
- Manual test & Reset Keys available via Front / Remote

Product Code	Description	HSN Code	Unit MRP
CURRENT PROTECTION RELAYS			
900CPR-1-1-BL-230V-CE	1Ø, Backlight, Over / Under current monitoring, 1 C/O, 230V AC	85363000	2316
900CPR-3-1-BL-230V-CE	1Ø & 3Ø, Backlight, Over / Under current monitoring, Current asymmetry, 1 C/O, 230V AC		2838
900CPR-1-BL-U-CE	1Ø, Backlight, Over / Under current monitoring, 2 x 1 C/O, 85 to 270V AC / DC		4013
CPRA2M-CE	1Ø, Analog over current protection from 10% to 100% of CT secondary, 5A max allowed CT secondary, 2CO relay, Adjustable trip time :- 0.5 sec to 15 Sec		2492



EARTH LEAKAGE RELAYS

- Type AC leakage current measurement from 10 mA to 30 A
- Highly sensitive CBCT using Nanocrystalline core
- High Sensitivity - tripping within 50 msec for 1X current and 30msec for 5X current
- Discrete LED indication for Power ON, Alarm and Fault
- Fixed variant for leakage current measurement is also available

Product Code	Description	HSN Code	Unit MRP
EARTH LEAKAGE RELAYS			
900ELR-2-230V-CE	Digital earth leakage relay, Leakage Current range: 10mA to 30A, 2 x 1 C/O, 230V AC	85363000	4778
ELR-341-1	Panel Mount ELR, Leakage Current range: 30mA to 30A, 85 to 270 V AC/DC		3377
ELRA2M2-1-230V	Analog earth leakage relay, Leakage current range: 30mA to 30A , 1 C/O, 230V AC		2295
ELRA2M2-1-230V-CE	Analog earth leakage relay, Leakage current range: 30mA to 30A , 1 C/O, 230V AC, CE		2868
ELCTR35-1-300mA-230V-CE	Earth leakage relay with inbuilt CBCT, Leakage current fixed: 300mA, 1 C/O, 230V AC		1827

Product Code	Description	HSN Code	Unit MRP
EARTH LEAKAGE RELAY ACCESSORIES			
CBCT-35-1-CE	Core balance current transformer with Dia 35mm	85364900	1013
CBCT-70-1-CE	Core balance current transformer with Dia 70mm		1477
CBCT-120-1-CE	Core balance current transformer with Dia 120mm		3266
CBCT-210-1-CE	Core balance current transformer with Dia 210mm		5711
CBCT-310-1-CE	Core balance current transformer with Dia 310mm		9759

Price list 2026 (w.e.f. April 6th, 2026)



EARTH FAULT RELAYS

- Short circuit protection for 1 & 3 phase system
- Wide supply range of supply: 85 to 270V AC/DC
- Field programmable trip current and trip time through front panel keys
- Manual test & Reset Keys available via Front / Remote
- Programmable Trip and Alarm relay
- Specialized current transformer with class 1 accuracy
- Works with standard 5A CT (Only for EFR-341-2-CE)

Product Code	Description	HSN Code	Unit MRP
EARTH FAULT RELAYS			
900EFR-BL-U-CE	Digital Din Rail mount earth fault relay, 2 x 1 C/O, 85 to 270V AC / DC	85363000	4568
EFR-341-2-CE	Digital Panel mount earth fault relay, 2 x 2 C/O, 85 to 270V AC / DC		3377
EARTH FAULT RELAY ACCESSORIES			
EFCT 100/25 160/1A VA1 CL1	Earth fault current transformer 160A, Window Size: 100x25 mm	85043100	1125
EFCT 140/35 160/1A VA1 CL1	Earth fault current transformer 160A, Window Size: 140x 35 mm		1568
EFCT 140/35 250/1A VA1 CL1	Earth fault current transformer 250A, Window Size: 140x35 mm		1803
EFCT 180/35 250 /1A VA1 CL1	Earth fault current transformer 250A, Window Size: 180x 35 mm		1774
EFCT 180/35 630 /1A VA1 CL1	Earth fault current transformer 630A Window Size: 180x35 mm		2367
EFCT 220/50 630 /1A VA1 CL1	Earth fault current transformer 630A, Window Size: 220x50 mm		2400

MOTOR & PUMP PROTECTION RELAYS



MOTOR & THERMISTOR PROTECTION RELAYS

- Motor Protection Relay with measurement of Voltage, Current & Frequency
- Monitors Overload as per International tripping class 5, 10, 15, 20, 30 (NEMA)
- Current and Voltage based Protection
- Earth Fault & Earth Leakage Protection
- Definite/ Inverse Protection as per NEMA Class 5,10,20,30
- Direct measurement of temperature in the stator winding via PTC Sensor
- Two tank water level monitoring with specially designed non-corrosive sensor

Product Code	Description	HSN Code	Unit MRP
MOTOR PROTECTION RELAYS			
MPR-342-2-CE	Digital panel mount motor protection relay with VAF Measurement, 2 x 1C/O, 100 to 270V AC / DC, RS485 Communication.	85363000	3377
MPR-341-2	Digital panel mount motor protection relay, 2 x 1C/O, 90 to 270V AC / DC		3260
PUMP PROTECTION RELAYS			
PPRD-4M-1-230V	1Ø-2W, Digital Pump Protection relay, Direct 30A	85363000	2553
PPRD-4M-3-415V	3Ø-3W, Digital pump protection relay, Push button type, Up to 80A via MPCT, 1 C/O, 415V		2862
MOTOR & PUMP PROTECTION RELAY ACCESSORIES			
MPCT D15 10A	Motor protection current transformer, up to 10A	85043100	936
MPCT D15 40A	Motor protection current transformer, up to 40A		1069
MPCT D15 80A	Motor protection current transformer, up to 80A		1220
LIQUID LEVEL CONTROLLERS			
LLCA-2M-1-U-CE	Single / Dual tank liquid level controller, 1 C/O SPDT, Automatic sensitivity - 0 to 500Kohms, 85 to 270V AC / DC	90328910	2033
WLCA2M1-CE-RoHS	Water level controller, Adjustable sensitivity 1K to 200K Ohm with sensors		2439
WLC Sensor	Set of 3 stainless sensor with LLC / WLC		406

Phase Sequence Relays 640 series

selec[®]



640PSR-V

- Programmable for :
- Asymmetry - 40V / 65V
 - Over / Under Voltage Protection
 - SPP / PSR Function

Time Relays

640XU

- Multifunction timer



TIME SWITCHES & ANALOG TIMERS



DIGITAL TIME SWITCHES

- Daily / Weekly or Astronomical function
- 30-50 ON-OFF steps
- Relay ratings: 16A / 20A
- Min. setting unit: 1 second
- 10 years battery life

Product Code	Description	HSN Code	Unit MRP
DIGITAL TIME SWITCHES			
ATS2M1-1-16A-230V-CE	DIN Rail - astronomical time switch, 1 C/O, 230V AC	91070000	3034
TS2M1-2-16A-230V-CE	DIN Rail - daily / weekly time switch, Dual Channel, 2 X 1 C/O SPDT, 230V AC		2859
TS2M1-1-16A-230V V2	DIN Rail - daily / weekly time switch, 1 C/O, 230V AC		2113
TS1W1-1-20A-230V	Wall mount - daily / weekly time switch, 1C/O, 230V AC		1756



TIME RELAYS

- Single & Multifunction timers available
- Wide setting ranges
- Universal power supply
- Precise time setting
- Panel or DIN rail mount

Product Code	Description	HSN Code	Unit MRP
DIN RAIL TIMERS - 17.5MM			
600DT-CU	Digital multi function timer, 0.1 sec to 999hr, 1 C/O, 20 to 240V AC & 20 to 240V DC	85364900	2264
600SD-2-230-CE	Star Delta timer, 3 sec to 60 sec, 2 C/O, 230V AC		1894
600XU-A-1-CU	Multi function timer, 0.1 sec to 3 hr, 1 C/O, 20 to 240V AC & 12 to 240V DC, UL certified		1846
640XU	Multi function Timer, 0.1 sec to 300 hr, 1 C/O, 20 to 240V AC & 12 to 240V DC		1760
642XA	Timer with On delay / Interval modes, 0sec to 60mins, 1 C/O, 20 to 240V AC & 12 to 240V DC		1437
642SQ-A	Timer with On delay / Interval modes, 0sec to 60mins, 1 C/O, 230V AC & 24V DC		981
600ST-CU	Single function timer, 0.1 sec to 3 hr, 1 C/O, 240V AC		1397
DIN RAIL TIMERS - 22.5MM			
800POD-180S	True power off delay timer, 180sec, 2 C/O, 110 to 240V AC	85364900	4528
800XMR	Forward - pause - reverse timer, On time: 1 to 8min Pause time: 10 to 80sec 2 C/O, 20 to 240V AC & 12 to 240V DC		2573
800XC	Asymmetrical Cyclic timer, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC		1855
800XU	Timer with On delay / Interval modes, 1sec to 30hr, 2 C/O, 20 to 240V AC & 12 to 240V DC		1687
800XA	Timer with On delay / Interval modes, 3sec to 60mins, 2 C/O, 20 to 240V AC & 12 to 240V DC		1229
800SQ-A	Timer with On delay / Interval modes, 3sec to 60mins, 1 C/O, 230V AC & 24V AC / DC		912
800SD-2-230	Star Delta timer, Run time : 30 / 60sec, Change over : 50 / 100 / 150 / 200ms, 2 C/O, 230V AC		1146
800SD-2-415	Star Delta timer, Run time : 30 / 60sec, Change over : 50 / 100 / 150 / 200ms, 2 C/O, 415V AC		1371
800S-1-ON-60S-415	Single function, 60sec, 1 C/O, 415V AC		1264
800S-1-ON-60S-230	Single function, 60sec, 1 C/O, 230V AC		904

Product Code	Description	HSN Code	Unit MRP
ANALOG PANEL MOUNT TIMERS			
55XC-T-G	Panel mount timer with cyclic function, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC	85364900	2186
55XU-T-G	Panel mount timer with On delay / Interval modes, 1sec to 30hr, 2 C/O, 20 to 240V AC & 12 to 240V DC		2114
55XC-P8-G	Plug in timer with cyclic function, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC		2006
55XU-P8-G	Plug in timer with On delay / Interval modes, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC		1899
55MF-P8	8Pin Output, Plug in multifunction timer, 0.05sec to 300hr, 2 X 1 C/O SPDT, 20-240V AC/ DC		1899
55ES-P8-230V-G	Plug in timer with On delay / Interval modes, 3sec to 60min, 1 C/O, 230V AC & 24V AC / DC		1216
55ES-T-230V-G	Panel mount timer with On delay / Interval modes, 3sec to 60min, 1 C/O, 230V AC & 24V AC / DC		1082



ANALOG TIME SWITCH

- 24 hrs program
- 96 ON-OFF steps
- Min. setting unit: 15 minutes
- Power reserve: 10 hrs

Product Code	Description	HSN Code	Unit MRP
ANALOG TIME SWITCH			
MTS4M-1-16A-230V-CE	DIN Rail / Flush mount - Mechanical daily / weekly time switch, 16A relay, 1 C/O SPDT, 230V AC	91070000	2113

SOLAR ON GRID INVERTER



3 to 10kW
3Ø

4 to 5.4kW
1Ø

TRULY INDIAN

- Technology
- Manufacturing

Indian Cloud Server
DCR Ready



4 to 6kW
1Ø

1 to 3.4kW
1Ø

Certification:

BIS



BEE



IEC



Note : For more information, Contact our Sales and Support team
HSN CODE - 85044090

Discontinued & Alternate codes

Discontinued	Alternate
MFM391	VAF391
MFM284-C-CE	Not available
MVA593-CE	Not available
EM368-C-CU	EM369-C-D-CE-CL05
EM306	EM306-C-CE
EM306-C-D	EM306-C-D-CE / EM306-C-CE
VAF39A-1-230V	VAF39A
MX300-CE	MX300-1-C-CE
MA501-230V-CE	MA501-CU
MVA591-30A-230V	MVA591-30A-230V-CE
MVA591-80A-230V	Not available
MVA591-10A-230V	Not available
MV334-230V	MV35-3-G-40/300V-CE
MA335-230VAC	MA32-3-G-40/300V-CE
Analog meter range	Not available
900VPR-2-300/600V	900VPR-2-280/600V-CE
642PSR	640PSR-CE
640CPR-24V	Not available
600XU-CU	600XU-A-1-CU
642PSR-CE-RoHS	640PSR-CE
800POD-60S	800POD-180S
VPRA-3-500/1000V-CE	Not available
ELRA2M2-1-FS-230V-CE	Not available
800S-1-ON-30S-415	800S-1-ON-60S-415
TS2M1-1-16A-230V-CE	TS2M1-1-16A-230V V2
55Q(V1.1)-P8-230V	55ES-P8-230V-G
800S-1-ON-30S-230	800S-1-ON-60S-230
900ELR-2-110V-CE	Not available
MPR-3M-2-230V	MPR-341-2
Auto switch-313/457V	Not available
55MF-P11	Not available
900CPR-1-230V	900CPR-1-1-BL-230V-CE
AN-8-0-0-230V	Not available
642PSR-310/520V	640PSR-CE
900CPR-3-230V	900CPR-3-1-BL-230V-CE
VERA2M1	Not available
600ELR-1-30/500mA-230V	Not available
800SD-2-110	Not available
800PSR-1	Not available
900VPR-2-280/520V-CE	VPRD-2-280/520V-CE
WLCA-2M-U-CE	LLCA-2M-1-U-CE



Head Office :

Selec Controls Pvt. Ltd.

EL-27/1, Electronic Zone, TTC Industrial Area, MIDC,
Mahape, Navi Mumbai 400710, INDIA.

Tel.: +91-22-4141 8468 / 452. Fax: +91-22-41418 408.

Email: sales@selec.com

www.selec.com

Subsidiaries:

Selec GmbH

Selec USA

Selec Australia

For more information, visit our website at : www.selec.com

- All Prices are in Indian Rupees.
- Maximum Retail Price (MRP) is inclusive of all taxes.
- Tax incidence on invoices is basis applicable GST rates.
- Product evolution is a continuous process and Selec reserves the right to modify/withdraw any product at any time without prior notice.
- Prices are subject to change without notice.
- Prices charged will be as prevailing on the date of dispatch.

Technical Support:

Email: salestech@selec.com

Tel.: +91-22-4141 8468 / 452

Monday to Saturday, 9:00AM - 5:30PM

Distributor: