

®



# LED LIGHTING CATALOGUE

DEV DIGITAL



2021

LIGHTING THE FUTURE



## ABOUT US

Devdigital Electronics Pvt. Ltd. is an ISO 9001:2015 certified company, established in 2014

Devdigital Electronics Private Limited has begun this journey to be the one-stop to buy high-quality LED products.

Our consistency and combined efforts with the team has helped us attain the indisputable position in the market as one of the trusted LED Light Manufacturers in Gandhinagar, Gujarat. Over the years, we have won the faith of our clients, which has encouraged us to introduce new advancements and features in our products to maximize customer satisfaction.

We have a team of experts holding rich domain experience that helps us to maintain a healthy relationship with clients by serving them the best products as promised. Our team is the reason we have managed to serve our clients as per their requirements. We are very well committed and offer reliable Led Industrial Light and unmatched after-sales support.

We have our well-equipped manufacturing facility and all the best resources and team to handle bulk queries and custom product demands of our customers. Whether you need LED Panel Light, LED Industrial Light or LED Flameproof Light, we've got you covered.

**LIGHTING THE FUTURE**



# CERTIFICATES



**DEV DIGITAL**

**System generated IC certificate**

**1. Wholesaler Name:** DEV DIGITAL ELECTRONICS  
**2. Manufacturer:** DEV DIGITAL ELECTRONICS PRIVATE LIMITED  
**3. Address:** 1001, SECTOR-19, GANDIDANABAR ROAD, GAZIABAD, U.P.  
**4. PIN Code:** 201008  
**5. Date of Issue:** 24.11.2018

**Certificate of Compliance**  
**Certificate No.: EQ-10076**

**Manufacturer Name:** DEV DIGITAL ELECTRONICS PRIVATE LIMITED  
**Address:** 1001, SECTOR-19, GANDIDANABAR ROAD, GAZIABAD, U.P.  
**Product:** LED LIGHTS, LED STRIP LIGHTS, LED DISPLAYS

**Date of Certification:** 07th September 2018  
**1st Surveillance Audit Due:** 06th September 2021  
**2nd Surveillance Audit Due:** 06th September 2022  
**Certificate Expiry:** 06th September 2023

**Certificate of Registration**  
**DEV DIGITAL ELECTRONICS**  
**801 DEV ELECTRONICS ESTATE, SECTOR-01, GANDIDANABAR ROAD, GAZIABAD, INDIA**

**ISO 9001:2015**  
**Quality Management System**

**Date of Certification:** 1st Nov 2018  
**1st Surveillance Audit Due:** 1st Nov 2020  
**2nd Surveillance Audit Due:** 1st Nov 2021  
**Certificate Number:** QRO/18/001

**Certificate of Compliance**  
**CE**  
**Certificate No.: CE-6060**

**Manufacturer Name:** DEV DIGITAL ELECTRONICS PRIVATE LIMITED  
**Address:** 1001, SECTOR-19, GANDIDANABAR ROAD, GAZIABAD, U.P.  
**Product:** LED LIGHTS, LED STRIP LIGHTS, LED DISPLAYS

**Date of Certification:** 07th October 2020  
**1st Surveillance Audit Due:** 06th October 2021  
**2nd Surveillance Audit Due:** 06th October 2022  
**Certificate Expiry:** 06th October 2023


**BIS CERTIFICATE OF REGISTRATION**  
**REGISTRATION NO.: 1001/2018/1001**

**Manufacturer Name:** DEV DIGITAL ELECTRONICS PRIVATE LIMITED  
**Address:** 1001, SECTOR-19, GANDIDANABAR ROAD, GAZIABAD, U.P.

**BIS CERTIFICATE OF REGISTRATION**  
**REGISTRATION NO.: 1001/2018/1001**


**Manufacturer Name:** DEV DIGITAL ELECTRONICS PRIVATE LIMITED  
**Address:** 1001, SECTOR-19, GANDIDANABAR ROAD, GAZIABAD, U.P.

**LIGHTING THE FUTURE**

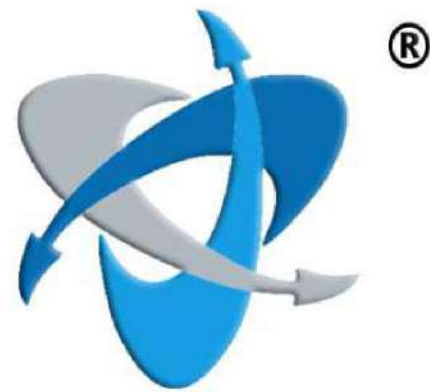

DEV DIGITAL

# WIDE RANGE OF OUTDOOR LIGHTING



LIGHTING THE FUTURE



# NILE

## LED STREET LIGHT



IS 10322



MERCURY FREE



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Day-Night Auto On-Off LDR Sensor Available
- 3/5 years Warranty option as per client requirement

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_SLN_16W	16W	16	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.780
DEV_SLN_20W	20W	20	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.780
DEV_SLN_24W	24W	24	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.780
DEV_SLN_30W	30W	28	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.780
DEV_SLN_36W	36W	36	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.920
DEV_SLN_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	1.100
DEV_SLN_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	1.100
DEV_SLN_72W	72W	72	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	2.000
DEV_SLN_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	2.050
DEV_SLN_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	2.410
DEV_SLN_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	2.600
DEV_SLN_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	4.210

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving street light.
- Long life, Low maintenance cost.



GeM  
Government  
e Marketplace



LDR  
Option Available

### Application



Architecture



Streets



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



Pedestrian



# ERIS

LED STREET LIGHT



MERCURY FREE



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Day-Night Auto On-Off LDR Sensor Available
- 3/5 years Warranty option as per client requirement

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	THD	Weight
DEV_SLE_24W	24W	24	>0.95	≥140	≥80	2700K-6500K	4Kv	≤10%	0.780
DEV_SLE_30W	30W	28	>0.95	≥140	≥80	2700K-6500K	4Kv	≤10%	0.780
DEV_SLE_36W	36W	36	>0.95	≥140	≥80	2700K-6500K	4Kv	≤10%	0.920
DEV_SLE_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	1.100
DEV_SLE_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	1.100
DEV_SLE_72W	72W	72	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	2.000
DEV_SLE_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	2.050
DEV_SLE_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	2.410
DEV_SLE_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	2.600
DEV_SLE_200W	200W	200	>0.95	≥179	≥80	6500K	6Kv	≤10%	4.210

## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving street light.
- Long life, Low maintenance cost.



GeM  
Government  
e Marketplace



LDR  
Option Available

## Application



Architecture



Streets



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



Pedestrian



# CAPSULE

LED STREET LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Day-Night Auto On-Off LDR Sensor Available
- 3/5 years Warranty option as per client requirement

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_SLC_24W	24W	24	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.68
DEV_SLC_30W	30W	30	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.70
DEV_SLC_36W	36W	36	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	0.81
DEV_SLC_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	0.85
DEV_SLC_72W	72W	72	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	1.66
DEV_SLC_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	1.66

## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving street light.
- Long life, Low maintenance cost.



GeM  
Government  
e Marketplace



LDR  
Option Available

## Application



Architecture



Streets



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard




Pedestrian



# THETA

LED STREET LIGHT



MERCURY FREE



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Day-Night Auto On-Off LDR Sensor Available
- 3/5 years Warranty option as per client requirement

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_SLT_20W	20W	20	>0.95	≥140	≥80	2700K-6500K	90	4Kv	≤10%	0.560
DEV_SLT_24W	24W	24	>0.95	≥140	≥80	2700K-6500K	90	4Kv	≤10%	0.560
DEV_SLT_30W	30W	30	>0.95	≥140	≥80	2700K-6500K	90	4Kv	≤10%	0.740
DEV_SLT_36W	36W	36	>0.95	≥140	≥80	2700K-6500K	90	4Kv	≤10%	0.760
DEV_SLT_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	1.170
DEV_SLT_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	2.360
DEV_SLT_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	2.830

## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving street light.
- Long life, Low maintenance cost.



GeM  
Government  
e Marketplace



LDR  
Option Available

## Application



Architecture



Streets



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



Pedestrian



# DOLPHIN

LED STREET LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Day-Night Auto On-Off LDR Sensor Available
- 3/5 years Warranty option as per client requirement

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_SLL_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	1.22
DEV_SLL_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	1.30
DEV_SLL_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	3.00
DEV_SLL_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	3.00
DEV_SLL_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	90	6Kv	≤10%	4.60

## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving street light.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



GeM  
Government  
e Marketplace



LDR  
Option Available

## Application



Architecture



Streets



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



Pedestrian

# SPARK

LED FLOOD LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_FLS_30W	30W	30	>0.95	≥140	≥80	2700K-6500K	120	4Kv	≤10%	1.32
DEV_FLS_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	1.32
DEV_FLS_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	2.00
DEV_FLS_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	3.40
DEV_FLS_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	3.60
DEV_FLS_250W	250W	250	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	4.50
DEV_FLS_300W	300W	300	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	5.10

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



High-Mast



# NILE

## LED FLOOD LIGHT



MERCURY FREE



- Input Voltage Range 85-300V AC @50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_FLN_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	1.80
DEV_FLN_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	1.90
DEV_FLN_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	2.55
DEV_FLN_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	2.60
DEV_FLN_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	3.61
DEV_FLN_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	4.10
DEV_FLN_250W	250W	250	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	8.60
DEV_FLN_300W	300W	300	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	8.70
DEV_FLN_400W	400W	400	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	9.20
DEV_FLN_500W	500W	500	>0.95	≥140	≥80	2700K-6500K	120	6Kv	≤10%	9.30

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



High-Mast



# ERIS

LED FLOOD LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder Coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	THD	Weight
DEV_FLE_50W	50W	10	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	1.80
DEV_FLE_60W	60W	12	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	1.90
DEV_FLE_100W	100W	20	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	2.65
DEV_FLE_120W	120W	24	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	2.72
DEV_FLE_150W	150W	30	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	3.64
DEV_FLE_200W	200W	40	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	4.10
DEV_FLE_250W	250W	50	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	8.60
DEV_FLE_300W	300W	60	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	8.70
DEV_FLE_400W	400W	80	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	9.20
DEV_FLE_500W	500W	100	>0.95	≥169	≥80	2700K-6500K	6Kv	≤10%	9.70

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard




High-Mast



# THETA

LED FLOOD LIGHT

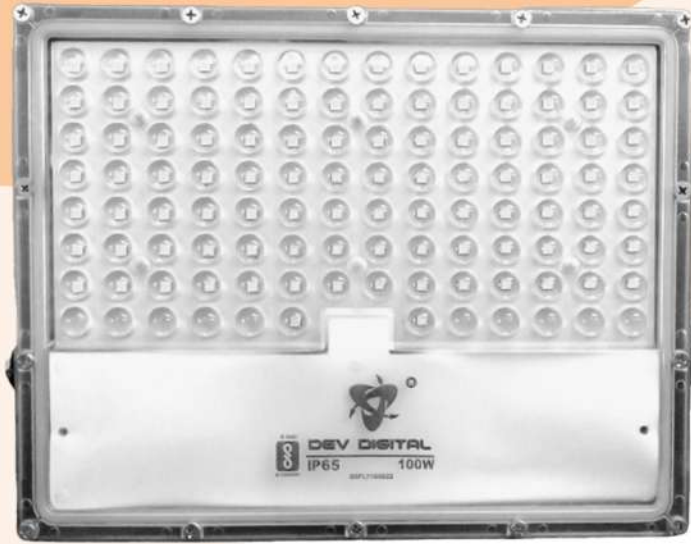

MERCURY FREE



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DEV_FLT_50W	50W	30	>0.95	≥140	≥80	2700K-6500K	6Kv	90	≤10%	1.25
DEV_FLT_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	6Kv	90	≤10%	2.25
DEV_FLT_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	6Kv	90	≤10%	2.90
DEV_FLT_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	6Kv	90	≤10%	3.25

## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



High-Mast

# LINEAR

## LED FLOOD LIGHT



- Input Voltage Range 85-300V AC @50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DEV_FLL_120W	120W	24	>0.95	≥140	≥80	3000K-6500K	6Kv	90	≤10%	-
DEV_FLL_240W	240W	48	>0.95	≥140	≥80	3000K-6500K	6Kv	90	≤10%	-
DEV_FLL_360W	360W	72	>0.95	≥140	≥80	3000K-6500K	6Kv	90	≤10%	-
DEV_FLL_480W	480W	96	>0.95	≥140	≥80	3000K-6500K	6Kv	90	≤10%	-

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



High-Mast



# CITY LIGHT

LED FLOOD LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DEV_FLC_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.50
DEV_FLC_100W	100W	102	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.70
DEV_FLC_150W	150W	192	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	3.40
DEV_FLC_200W	200W	192	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	3.60
DEV_FLC_300W	300W	300	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.20

## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



High-Mast

# DUOS

LED FLOOD LIGHT



- Any two colour combinations
- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_FLDO_100W	100W	100	>0.95	≥120	≥80	2700K-6500K	120	6Kv	≤10%	2.10
DEV_FLDO_200W	200W	200	>0.95	≥120	≥80	2700K-6500K	120	4Kv	≤10%	3.60

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application





# RGB

## LED FLOOD LIGHT



- Input Voltage Range 85-300V AC @50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Weight
DEV_FLRGB_50W	50W	50	>0.95	≥120	≥80	2700K-6500K	120	6Kv	≤10%	1.32
DEV_FLRGB_100W	100W	100	>0.95	≥120	≥80	2700K-6500K	120	6Kv	≤10%	2.00

### BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



Architecture



Stadium



Tunnel



Petrol Pump



Factory



Bridge



Garden



Parking



Billboard



High-Mast

# TOSHI

LED HIGHBAY LIGHT



MERCURY FREE



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement
- IP54/IP65 as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DDE_HBLT_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.30
DDE_HBLT_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.40
DDE_HBLT_72W	72W	72	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	2.10
DDE_HBLT_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	2.45
DDE_HBLT_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	2.65
DDE_HBLT_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.30
DDE_HBLT_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.47
DDE_HBLT_250W	250W	250	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	7.00
DDE_HBLT_300W	300W	300	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	7.27

## BENEFITS:

- Easily replace conventional high bays, up to 80% energy savings
- 50,000 hours life span.
- Adaptable in Rough Environment
- Flexible Installation, easily replace existing fixtures
- Die-cast aluminum housing



## Application





# ERIS

## LED HIGHBAY LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement
- IP54/IP65 as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	THD	Weight
DEV_HBLE_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	1.30
DEV_HBLE_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	1.42
DEV_HBLE_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	1.63
DEV_HBLE_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	1.75
DEV_HBLE_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	4.35
DEV_HBLE_180W	180W	180	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	4.55
DEV_HBLE_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	6Kv	≤10%	4.70

### BENEFITS:

- Easily replace conventional high bays, up to 80% energy savings
- 50,000 hours life span.
- Adaptable in Rough Environment
- Flexible Installation, easily replace existing fixtures
- Die-cast aluminum housing




## Application



# THETA

## LED HIGHBAY LIGHT

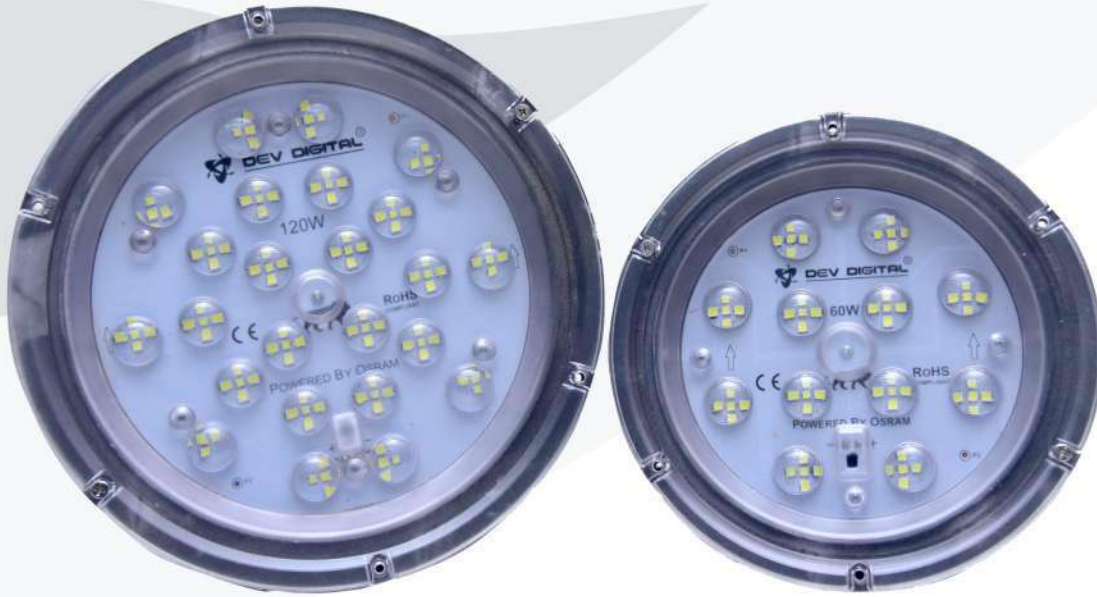

- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement
- IP54/IP65 as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DEV_HBLTH_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.30
DEV_HBLTH_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.42
DEV_HBLTH_72W	72W	72	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.70
DEV_HBLTH_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.63
DEV_HBLTH_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.75
DEV_HBLTH_150W	150W	150	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.35
DEV_HBLTH_200W	200W	200	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.55
DEV_HBLTH_250W	250W	250	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.70
DEV_HBLTH_300W	300W	300	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	4.70

### BENEFITS:

- Easily replace conventional high bays, up to 80% energy savings
- 50,000 hours life span.
- Adaptable in Rough Environment
- Flexible Installation, easily replace existing fixtures
- Die-cast aluminum housing



## Application





# LIFO

## LED HIGHBAY LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement
- IP54/IP65 as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- 3/5 years Warranty option as per client requirement
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DEV_HBLU_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.15
DEV_HBLU_120W	120W	120	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.65
DEV_HBLU_180W	180W	180	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	2.30

### BENEFITS:

- Easily replace conventional high bays, up to 80% energy savings
- 50,000 hours life span.
- Adaptable in Rough Environment
- Flexible Installation, easily replace existing fixtures
- Die-cast aluminum housing



## Application



# CORONA

LED WELLGLASS LIGHT



- Input Voltage Range 85-300V AC @ 50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Day-Night Auto On-Off LDR Sensor Available
- 3/5 years Warranty option as per client requirement
- Milky white cover available (Diffuser)


Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	Beam Angle(°)	THD	Weight
DEV_WG_36W	36W	36	>0.95	≥140	≥80	2700K-6500K	4Kv	120	≤10%	1.00
DEV_WG_40W	40W	40	>0.95	≥140	≥80	2700K-6500K	4Kv	120	≤10%	1.10
DEV_WG_50W	50W	50	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.15
DEV_WG_60W	60W	60	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.20
DEV_WG_72W	72W	72	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.80
DEV_WG_100W	100W	100	>0.95	≥140	≥80	2700K-6500K	6Kv	120	≤10%	1.85

## BENEFITS:

- Easily replace conventional high bays, up to 80% energy savings
- 50,000 hours life span.
- Adaptable in Rough Environment
- Flexible Installation, easily replace existing fixtures
- Die-cast aluminum housing



## Application

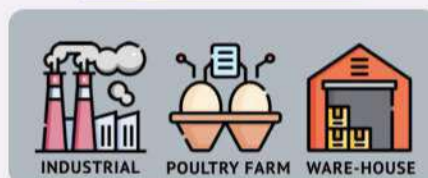



# PLUTO

LED CANOPY LIGHT



- Input Voltage Range 85-300V AC @50 - 60Hz
- High Volt Auto Cut-Off
- IP66 Drivers
- External 10KV SPD as per requirement

- Aluminum Pressure Die cast body with Powder coated
- OSRAM 5050 LED and Equivalent
- 2 years Warranty

Product ID	Power (W)	LED Qty	P.F	Efficiency* Lm/W	CRI	CCT (K)	Surge	THD	Weight
DEV_CNPY_100W	100W	20	>0.95	≥179	≥80	6500K	6Kv	≤10%	1.85


## BENEFITS:

- excellent light effect, No dark spaces.
- Safe for Outdoor use, weather resistant.
- Up to 85% energy saving.
- Flexible Installation, easily replace other parts.
- Long life, Low maintenance cost.



## Application



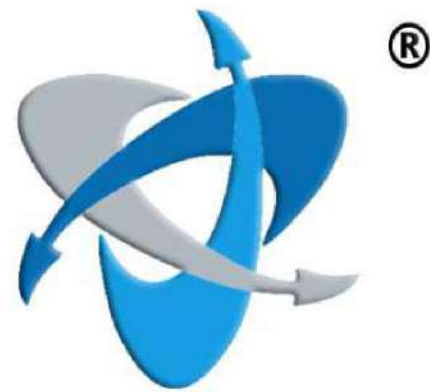

DEV DIGITAL

# WIDE RANGE OF INDOOR LIGHTING



LIGHTING THE FUTURE



# BATTEN/TUBE LIGHT



- Input Voltage Range 85-300V AC @50 - 60Hz
- IP66 Drivers
- Internal 4KV SPD
- 2 Year Warranty.

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle (°)	Surge	THD	Total Lumens
DEV_BTN_10W	10W	>0.95	≥130	≥85	2700K-6500K	120	4Kv	≤10%	1300Lm
DEV_BTN_20W	20W	>0.95	≥130	≥85	2700K-6500K	120	4Kv	≤10%	2600Lm

## BENEFITS:

- Up to 70% energy savings
- Adaptable in Rough Environment
- 50,000 hours life span, 5 times longer than conventional light.
- Flexible Installation, easily replace existing fixtures

## Application



# PC PANEL

## LED PANEL LIGHT



DEV DIGITAL



- Input Voltage Range 85-300V AC @50 - 60Hz
- IP66 Drivers
- Internal 4KV SPD
- 2 Year Warranty.

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle (°)	Surge	THD	Total Lumens
DEV_PCL_10W	10W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤10%	1300Lm
DEV_PCL_15W	15W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤10%	1950Lm
DEV_PCL_24W	24W	>0.95	≥130	≥80	2700K-6500K	100	4Kv	≤10%	3120Lm

### BENEFITS:

- Up to 70% energy savings
- Adaptable in Rough Environment
- 50,000 hours life span, 5 times longer than conventional light.
- Flexible Installation, easily replace existing fixtures

### Application



OFFICE



HOME



RESTAURANT




# RIMLESS

## LED PANEL LIGHT



DEV DIGITAL

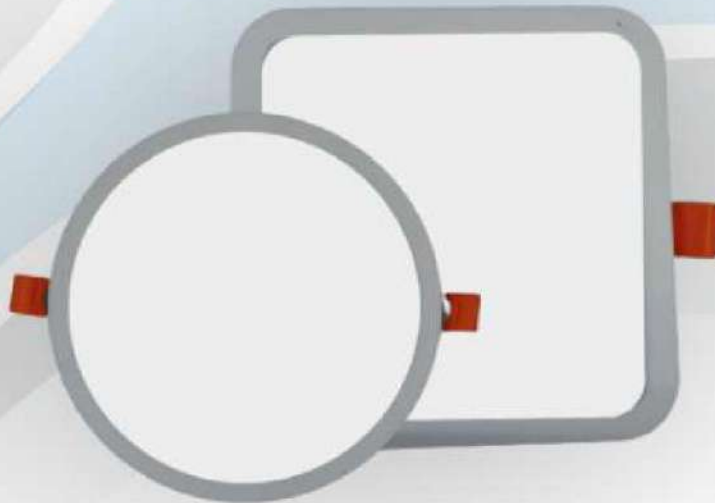

- Input Voltage Range 85-300V AC @50 - 60Hz
- IP66 Drivers
- Internal 4KV SPD
- 2 Year Warranty.

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle (°)	Surge	THD	Total Lumens
DEV_RPL_8W	8W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤10%	1040Lm
DEV_RPL_15W	15W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤10%	1950Lm
DEV_RPL_22W	22W	>0.95	≥130	≥80	2700K-6500K	100	4Kv	≤10%	2860Lm

### BENEFITS:

- Up to 70% energy savings
- Adaptable in Rough Environment
- 50,000 hours life span, 5 times longer than conventional light.
- Flexible Installation, easily replace existing fixtures

### Application



OFFICE



HOME



RESTAURANT

# DEEP DOWN

## LED PANEL LIGHT



- Input Voltage Range 85-300V AC @50 - 60Hz
- IP66 Drivers
- Internal 4KV SPD
- 2 Year Warranty.

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle(°)	Surge	THD	Total Lumens
DEV_DDP_10W	10W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤20%	1300Lm
DEV_DDP_20W	20W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤20%	2600Lm
DEV_DDP_24W	24W	>0.95	≥130	≥80	2700K-6500K	100	4Kv	≤20%	3120Lm

### BENEFITS:

- Up to 70% energy savings
- Adaptable in Rough Environment
- 50,000 hours life span, 5 times longer than conventional light.
- Flexible Installation, easily replace existing fixtures

### Application





# 2x2 PANEL

## LED PANEL LIGHT



DEV DIGITAL



- Input Voltage Range 85-300V AC @50 - 60Hz
- IP66 Drivers
- Internal 4KV SPD
- 2 Year Warranty.

- Aluminum Pressure Die cast body with Powder coated
- OSRAM / Crescent / Edison 3030 LED and Equivalent
- Controlled Heat Emission
- Excellent Thermal Management, High Lumen Output

Product ID	Power (W)	P.F	Efficiency* Lm/W	CRI	CCT (K)	Beam Angle (°)	Surge	THD	Total Lumens
DEV_SPL_36W	36W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤10%	4680Lm
DEV_SPL_50W	50W	>0.95	≥130	≥85	2700K-6500K	100	4Kv	≤10%	6500Lm

### BENEFITS:

- Up to 70% energy savings
- Adaptable in Rough Environment
- 50,000 hours life span, 5 times longer than conventional light.
- Flexible Installation, easily replace existing fixtures

### Application




OFFICE



HOME



RESTAURANT



DEV DIGITAL

# LDR SENSOR




<b>Product Code</b>	DDE_LDR
<b>Input Voltage</b>	85-300 VAC
<b>Operating Frequency</b>	50Hz
<b>External Load Capacity</b>	Upto 400 Watt
<b>Output Voltage/Current</b>	240VAC/0-6Amp
<b>Offload power consumption</b>	0.54 Watt
<b>Internal surge protection</b>	2.5KV
<b>IP rating</b>	IP 66
<b>Enclosure Material</b>	ABS plastic
<b>Ambient light level</b>	≤5 lux to 21 lux (± 5% tolerance) lux level for switching on ≤ 6 LUX lux level for switching
<b>Working function</b>	Automatic switch ON light in night. Automatic switch OFF light in morning.
<b>Mounting option</b>	Zinc plated metal clamp
<b>Warranty</b>	1.5 year
<b>Applications</b>	Street Light, Outdoor lights


### Additional Features

- With genuine quality components.
- Single shot ON-OFF operation.
- No flickering at load side.
- Heavy duty and long life circuit.
- Fit and Forget module.
- No need to On or OFF lights during day or night.
- Helps to save electricity.
- 1.5 Year warranty





# STREET LIGHT ARM /BRACKET/CLAMP

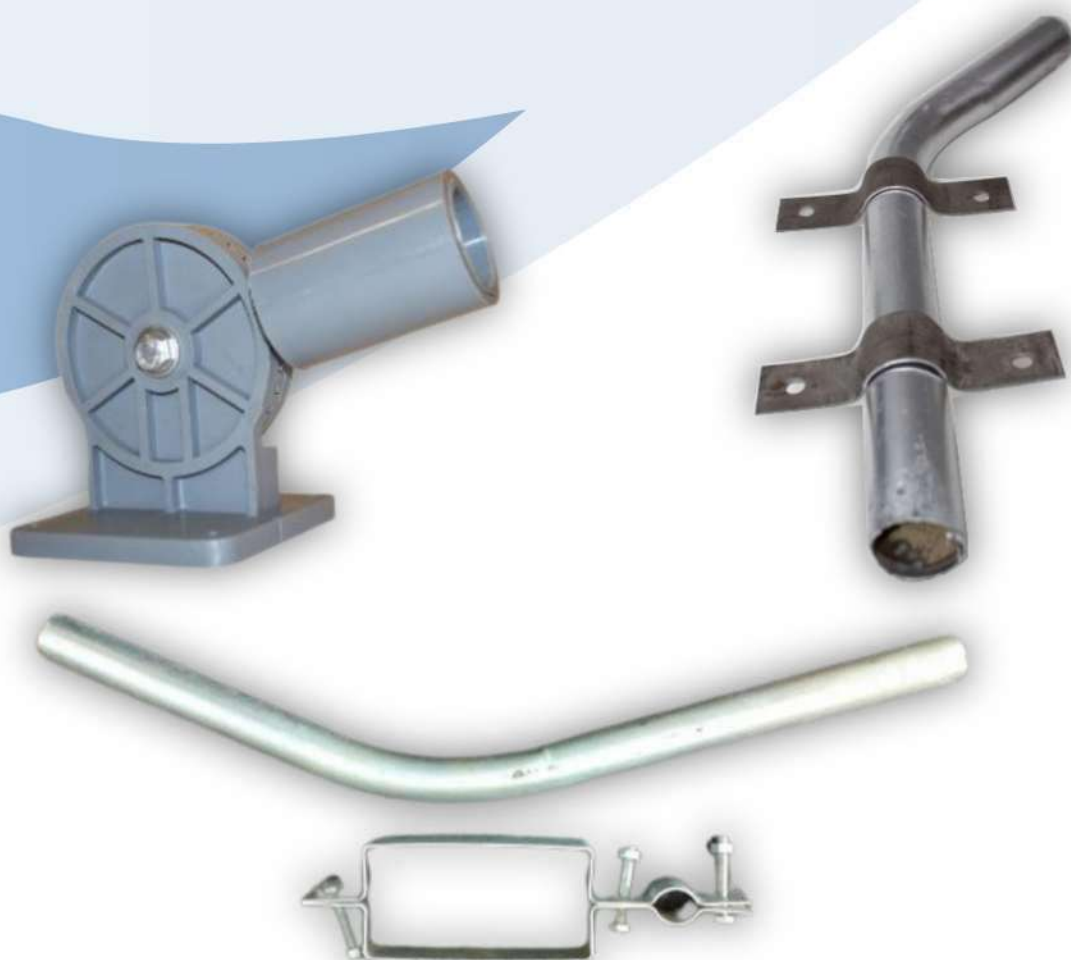

## Customization offers...

- Various size, design & Color options
- Wall mount / Pole mount
- Zinc plated / Powder coated / Galvanized material
- Corrosion free material
- Zinc plated or Non plated nut bolts
- Minimum Order quantity required 50 pcs



**DEV DIGITAL**

## OUR VALUABLE CLIENTS



**LIGHTING THE FUTURE**





**DEV DIGITAL**

**DEVDIGITAL ELECTRONICS PVT. LTD**

**B-93, Electronics Estate, GIDC, Sector-25,  
Gandhinagar, Gujarat, India. 382024**

**sales.ddelectronics@gmail.com**

**Hello :- +91 8849806219, +91 9662424588**

**PAN :- AAHCD6404B**

**GSTIN :- 24AAHCD6404B1Z8**

**LIGHTING THE FUTURE**