



























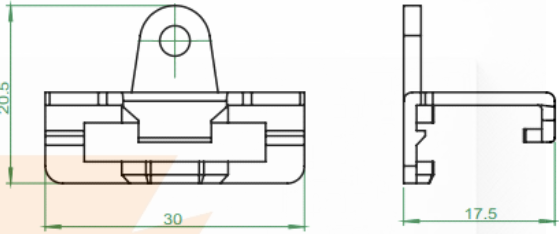
Quick Connector

Sr No.	Part Code	Image	Technical Parameter
1	PCT-212		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
2	PCT-213		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
3	PCT-215		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
4	422		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
5	623		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
6	633		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C

7	LT-933		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
8	422D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
9	623D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
10	633D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
11	933D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
12	PCT 222		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C

13	PCT 223		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
14	PCT 224		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
15	PTC-222D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
16	PTC-223D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
17	PTC-224D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
18	PTC-225D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C

19	HM-223-6D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
20	HM-223-8D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
21	HM-223-10D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
22	HM-223-12D		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
23	PCT-223-8P		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C
24	PCT-223-10P		Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm ² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C

25	PCT-223-12P		<p>Reference standard : IEC Rated Voltage : 450V Rated Current : 32A Wire Diameter : 0.5-4mm² Voltage Resistance : 4kV Temperature Range : - 40°C~+105°C</p>
26	PCT-22		
27	PCT-21	