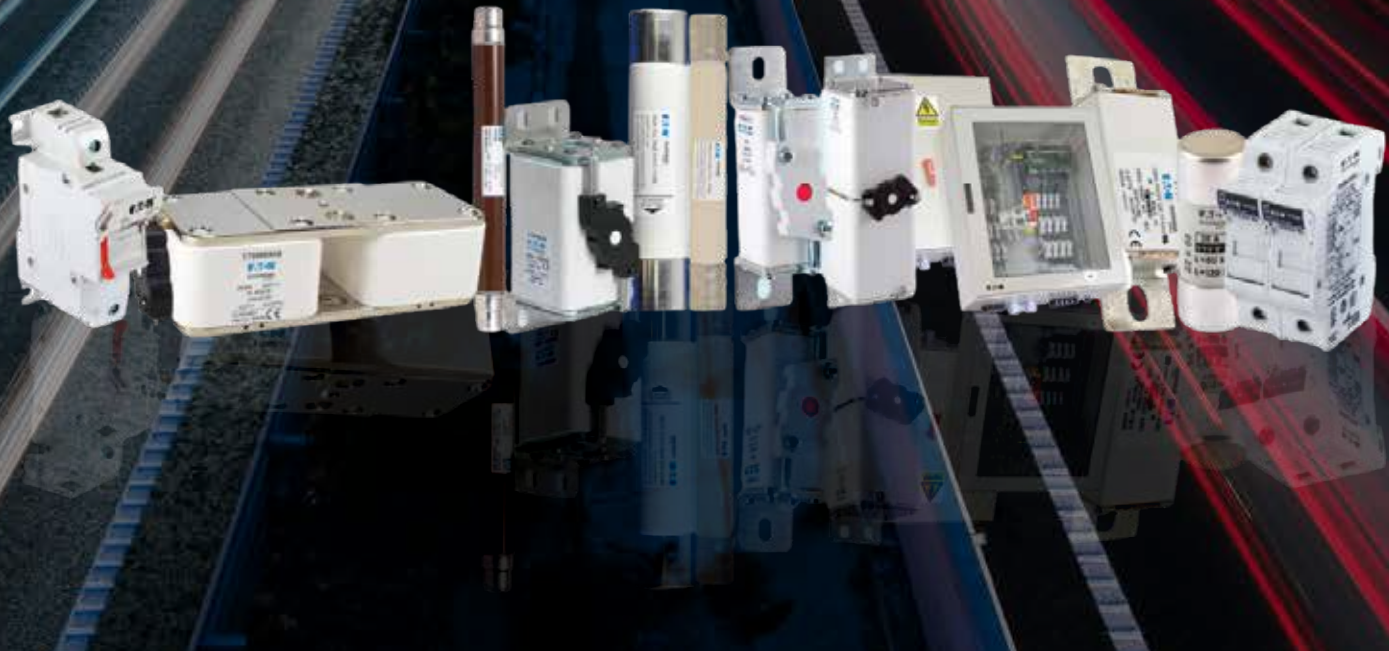


Leading the way in new innovative circuit protection



With effect from 1st April, 2023



Powering Business Worldwide

About **EAT•N**

Eaton is a global leading power management company headquartered in USA, serving customers across the world. Our proven technologies enable customers to generate more power using fewer resources, answering the demands of today's fast changing world. Eaton products and services provide the power inside thousands of products and projects – from energy efficient buildings, cities, infrastructure to next generation aircraft, cars, trucks and machines. Eaton is a Fortune 500 company recognized amongst the most admired firms in our industry.

Eaton Power Quality Private Limited, India, is a 100% subsidiary and a part of electrical sector of Eaton Corporation. We are catering to every industrial segment with versatile solutions which includes Switchgear: LV & MV Solutions, Fusegear: LV & MV solutions, UPSs and software solutions.

Operating in
175
countries

92,000+
employees

100+
years of
experience

\$ 20.8
BILLION IN
SALES 2022

18,000+
patents

The Fusion Of Our Heritage

Meeting power management needs around the world



Toll free number: **1800 425 5758, 1800 102 4620** Emergency number : **893 922 2522**

✉ helpdeskelectrical@eaton.com

w.e.f from 1st April 2023

Eaton's Product Range

Low Voltage Distribution Products

Air Circuit Breakers	PSL / IZM
Molded Case Circuit Breakers	PDC / NZM / BZMx
Disconnectors	P / PN
Mining Duty Breakers	
ATS	



Contactors

Mini Contactors & Control Relays	DILEM / DILEEM / DILER
Control Relays & Power Contactors	DILM / DILA / XTC
Vacuum Contactors	DILM / DILH /V201
4 Pole Contactors	DILMP
Capacitor Duty Contactors	DILK
DC Mill Duty Contactors	
DC Power Contactors	
Definite Purpose Contactors	



Overload Relays

Thermal Magnetic Overload Relay	ZB/ZE/ZEB
Motor Management Relay	Motor Insight, C440
Thermistor Based Overload Relays	EMT6



Motor Protection Circuit Breakers (MPCB)

MPCB with Push Button Control	PKZM01
MPCB with Rotary Handle Control	PKZM0
MPCB with Electronic Release	PKE



Low Voltage Control Products

Pilot Devices (22.5mm & 16mm)	RMQTitan (M22) / A22
Pilot Devices (30.5mm)	E30/E34/10250T
Foot & Palm Switch	FAK
Signal Towers	SL
Pressure Switches	MCS
Position Switches / Safety Switches ...	LS
Sensors	Inductive / Capacitive / Optical
Limit Switches	Precision / Mini / Metal / Metal-IP67 / Hazardous Applications



w.e.f from 1st April 2023

Eaton's Product Range

Cam Switches & Switch - Disconnectors

Cam Switches upto 132KW.....	T
Switch-Disconnector upto 110KW/315A	P
ATEX Rated Enclosures	T/P



Electronic Relays

Safety Relay	ESR5
Safety Control Relays	Easy Safety
Timing Relays	ETR2 / ETR4
Measuring & Monitoring Relays	EMR



Automation Products

Relays	Easy500/700/800
PLC's	XC / EC4
HMI/ HMI-PLC's	XVC
Smartwire Darwin Communication System	



Motor Starters

DOL / RDOL Starter upto 32A with PKZM0	
DOL / RDOL Starter upto 32A with PKE	
Soft Starters upto 900KW.....	S8014/S8114
Variable Speed Starter	DE1
Variable Speed Drive	DG1/DF1/DV1



Enclosures

IP65, Outdoor rated Polycarbonate Opaque/Transparent ...	CI / CI-K
MCB Individual Enclosure	AE...
MCCB / Switch Disconnector	MCCB...
Fuse Enclosure	RS..



Solar Products

Air Circuit Breakers upto 4000A, 690V/800V/1140V/1500V AC
Moulded Case Circuit Breakers upto 1600A, 800V/1000V AC
Miniature Circuit Breakers upto 63A, 500V DC/1000V DC
Disconnectors upto 60A, 1000V DC rated
Disconnectors, 160A - 1400A, 1500V DC rated
Fuse & Fuse Base, 1000V DC
Inverters upto 1MW
DC Combiner Boxes
AC Switchgear



w.e.f from 1st April 2023

Contents

Low Voltage Fuse Links & Fuse Holders

HRC Fuse Fittings & Bases	5
Low Voltage BS88 Type of Fuse Links	5 - 8
Low Voltage NH Type of Fuse Links	9

Highspeed Voltage Fuse Links

BS88 Semi-Conductor Protection, Highspeed Fuses	10 - 11
Accessories for BS88 Highspeed Fuses	12

High Voltage Fuse Links

BS Type HV Fuses for use in Air	13 - 14
HV Fuses for use in Oil	15
HV Fuses for use in PT/VT & Auxillary Transformer	15
HV Fuses for use in for HV Motor Circuits	16

Fuse Range

Low Voltage BS88 Type of Fuse Links Range	17 - 18
Highspeed Voltage Fuse Links Range	19 - 20
Medium Voltage Fuse Links	21
HV Fuses for use in Motor Circuits	22

Cross Reference Chart

Cross Reference Chart	23
-----------------------	----

Fuse Base for LV NH Type of Fuse

IS / BS Size Reference	Description	No. of Poles	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
00 / C00	Fuse Base	Single	160NHG00B/ 100NHG000B	160	SB00-PB	690	420	3	3	O
00 / C00	Top Cover	Single	160NHG00B/ 100NHG000B	160	TC00	690	70	3	3	O
00 / C00	Phase Barrier	Single	160NHG00B/ 100NHG000B	160	IPB00	690	70	6	6	O
00 / C00	Terminal Shield	Single	160NHG00B/ 100NHG000B	160	TS00	690	60	6	6	O




Fuse Fittings for LV BS Type of Fuses

IS / BS Size Reference	Tag Type	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Carton Qty.	MOQ	Delivery Class
F1	Clip on	Front (#)	F06/NSD	20	FA20	500	175	10	10	N
		Front	F06/NSD	32	FA32	500	185	10	10	N
		Back	F06/NSD	32	FB32	500	255	10	10	N
		Busbar	F06/NSD	32	FD32	500	250	10	10	N
A2	Offset Bolted	Front	H07/F07/AAO	32	HA32	500	310	5	5	N
		Busbar	H07/F07/AAO	32	HD32	500	380	5	5	N
A3	Offset Bolted	Front	T07/BAO/KO7	63	KA63	500	400	5	5	N
		Busbar	T07/BAO/KO7	63	KD63	500	480	5	5	N
A4	Offset Bolted	Front	L14/KL14/M14	100/125	LA125	500	1145	1	1	N
		Busbar	L14/KL14/M14	100/125	LD125	500	1490	1	1	N
F1	Clip on	Front	F06/NSD	32	32NNSF	550	250	10	10	N
		Front	ESD	63	63NSF	415	1870	5	5	O

Safe lock Range - Screw as wells as DIN Rail fixing (#)

(#) Available on request Busbar / Stud Mounting
In White / Grey Body

Low Voltage BS88 - Clip on Type of Fuses


240 / 550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Breaking Capacity (kA)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	
	E1	SMALL CLIP	240	33	2	SSD2	75	20	20	N
			240	33	4	SSD4	75	20	20	N
			40	33	6	SSD6	75	20	20	N
			240	33	10	SSD10	75	20	20	N
			240	33	16	SSD16	85	20	20	N
			240	33	20	SSD20	85	20	20	N
			240	33	25	SSD25	90	20	20	O
	F1	CLIP ON	550	80	2	NSD2	65	20	20	N
			550	80	4	NSD4	65	20	20	N
			550	80	6	NSD6	65	20	20	N
			550	80	10	NSD10	65	20	20	N
			550	80	16	NSD16	75	20	20	N
			550	80	20	NSD20	75	20	20	N
			550	80	25	NSD25	80	20	20	N
	F2	LONG CLIP	550	80	2	ESD2	110	20	20	O
			550	80	4	ESD4	110	20	20	O
			550	80	6	ESD6	110	20	20	O
			550	80	10	ESD10	110	20	20	O
			550	80	16	ESD16	110	20	20	O
			550	80	20	ESD20	110	20	20	O
			550	80	25	ESD25	115	20	20	O
			550	80	32	ESD32	115	20	20	O
			550	80	40	ESD40	150	20	20	O
			550	80	50	ESD50	150	20	20	N
550	80	63	ESD63	150	20	20	N			

N - Normal; O - On Order

w.e.f from 1st April 2023


Low Voltage BS88 Type of fuses

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA

660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFF SET TAG	660 / 690	2	2HO7-660	120	20	20	N	TIA
		CLOSED SLOT	660 / 690	4	4HO7-660	120	20	20	N	
			660 / 690	6	6HO7-660	120	20	20	N	
			660 / 690	10	10HO7-660	140	20	20	N	
			660 / 690	16	16HO7-660	140	20	20	N	
			660 / 690	20	20HO7-660	140	20	20	N	
			660 / 690	25	25HO7-660	140	20	20	N	
	A3	OFF SET TAG	660 / 690	35	35KO7-660	195	20	20	N	TIS
		CLOSED SLOT	660 / 690	40	40KO7-660	195	20	20	N	
			660 / 690	50	50KO7-660	210	20	20	N	
			660 / 690	63	63KO7-660	210	20	20	N	
	A4	OFF SET TAG	660 / 690	80	80L14-660	340	10	10	N	TCP
		CLOSED SLOT	660 / 690	100	100L14-660	340	10	10	N	
	-	OFF SET TAG	660 / 690	125	125L14-660	690	5	5	N	TFP
		CLOSED SLOT	660 / 690	160	160L14-660	740	5	5	N	
			660 / 690	200	200L14-660	765	5	5	N	

N - Normal; O - On Order

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA



660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	CENTRE TAG	660 / 690	80	80LO9-660	385	10	10	O	TC
		SINGLE SLOT	660 / 690	100	100LO9-660	390	10	10	N	
	B2	CENTRE TAG	660 / 690	125	125MO9-660	750	5	5	N	TF
		SINGLE SLOT	660 / 690	160	160MO9-660	765	5	5	N	
			660 / 690	200	200MO9-660	840	5	5	N	
	B3	CENTRE TAG	660 / 690	250	250NO9-660	1415	1	1	N	TKF
SINGLE SLOT		660 / 690	315	315NO9-660	1435	1	1	N		
	C1	CENTRE TAG	660 / 690	355	355P11-660	1750	1	1	O	TMF
		DOUBLE SLOT	660 / 690	400	400P11-660	1800	1	1	O	
	C2	CENTRE TAG	660 / 690	450	450R11-660	2020	1	1	O	TM
		DOUBLE SLOT	660 / 690	500	500R11-660	2100	1	1	O	
			660 / 690	560	560R11-660	2370	1	1	O	TTM
			660 / 690	630	630R11-660	2520	1	1	O	

N - Normal; O - On Order

w.e.f from 1st April 2023


Low Voltage BS88 Type of fuses

Bolted Type, 550 Volts range, Breaking Capacity - 80kA

550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	-	OFFSET TAG	550	2	NITD2	95	20	20	N	NIT
		OPEN SLOT	550	4	NITD4	95	20	20	N	
			550	6	NITD6	95	20	20	N	
			550	10	NITD10	95	20	20	N	
			550	16	NITD16	95	20	20	N	
			550	20	NITD20	95	20	20	N	
			550	25	NITD25	105	20	20	O	
	A2	OFFSET TAG	550	2	AAO2	85	20	20	N	TSA
		CLOSED SLOT	550	4	AAO4	85	20	20	O	
			550	6	AAO6	85	20	20	N	
			550	10	AAO10	85	20	20	N	
			550	16	AAO16	85	20	20	N	
			550	20	AAO20	95	20	20	N	
			550	25	AAO25	95	20	20	N	
			550	32	AAO32	95	20	20	N	
	A3	OFFSET TAG	550	35	BAO35	155	20	20	N	TSS
		CLOSED SLOT	550	40	BAO40	155	20	20	N	
		(@)	550	50	BAO50	160	20	20	N	
			550	63	BAO63	175	20	20	N	
	-	OFFSET TAG	550	80	OSD80	385	20	20	N	TSDS
		CLOSED SLOT	550	100	OSD100	420	20	20	N	

Note: (@) - KO7 - Open Slot, BAO - Closed Slot
N - Normal; O - On Order

Bolted Type, 550 Volts range, Breaking Capacity - 80kA



550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	C2	CENTRE TAG	550	450	FF450	2545	1	1	O	TST
		DOUBLE SLOT	550	500	FF500	2675	1	1	O	
			550	560	FF560	2945	1	1	O	
			550	630	FF630	3210	1	1	O	
	C3	CENTRE TAG	550	710	GF710	3415	1	1	O	TLM
		DOUBLE SLOT	550	800	GF800	3415	1	1	O	
	-	CENTRE TAG	550	710	GG710	#	1	3	O	TLT
		DOUBLE SLOT	550	800	GG800	#	1	3	O	
			550	1000	GG1000	#	1	3	O	
			550	1250	GG1250	#	1	3	O	

- Price Available on request
N - Normal; O - On Order

w.e.f from 1st April 2023

Low Voltage BS88 Type of fuses

Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	-	OFFSET TAG	550	2	EITD2	110	20	20	N	EIT
		OPEN SLOT	550	4	EITD4	110	20	20	N	
			550	6	EITD6	110	20	20	N	
			550	10	EITD10	110	20	20	N	
			550	16	EITD16	120	20	20	N	
			550	20	EITD20	120	20	20	N	
			550	25	EITD25	120	20	20	N	
			415	32	EITD32	140	20	20	N	
			415	40	EITD40	140	20	20	N	
			415	50	EITD50	150	20	20	N	
			415	63	EITD63	150	20	20	N	
	A4	OFFSET TAG	415	32	CEO32	265	10	10	O	TSD
		CLOSED SLOT	415	40	CEO40	265	10	10	O	
			415	50	CEO50	295	10	10	O	
			415	63	CEO63	295	10	10	O	
			415	80	CEO80	365	10	10	N	
			415	100	CEO100	420	10	10	N	
	-	OFFSET TAG	415	125	DEO125	385	5	5	N	TSFP
		CLOSED SLOT	415	160	DEO160	425	5	5	N	
			415	200	DEO200	470	5	5	O	
	B1	CENTRE TAG	415	80	CD80	390	10	10	O	TSDC
		SINGLE SLOT	415	100	CD100	530	10	10	N	
	B2	CENTRE TAG	415	125	DD125	460	5	5	N	TSF
		SINGLE SLOT	415	160	DD160	480	5	5	N	
			415	200	DD200	510	5	5	N	
	B3 / B4	CENTRE TAG	415	250	ED250	1005	1	1	N	TSF/ TSK
		SINGLE SLOT								
B3/B4	CENTRE TAG	415	315	ED315	1105	1	1	N	TSK	
	SINGLE SLOT									
B4	CENTRE TAG	415	355	ED355	1150	1	1	O	TSK/ TSM	
	SINGLE SLOT	415	400	ED400	1185	1	1	N		

N - Normal; O - On Order

Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	-	CENTRE TAG	415	355	355SN11(S)	1380	1	1	O	TSM
		SINGLE SLOT	415	400	400SN11(S)	1425	1	1	N	
	-	CENTRE TAG	415	450	450SP11(S)	1740	1	1	O	TSTS
		SINGLE SLOT	415	500	500SP11(S)	2010	1	1	O	
	-	CENTRE TAG	415	560	560SR11(S)	2675	1	1	O	TSL
		SINGLE SLOT	415	630	630SR11(S)	3075	1	1	N	
			415	710	710SR11(S)	-	1	1	O	
		415	800	800SR11(S)	3415	1	1	N		
	C1	CENTRE TAG	415	355	EF355	2275	1	1	O	TSM
		DOUBLE SLOT	415	400	EF400	2345	1	1	O	
	-	CENTRE TAG	415	710	710SR11	3835	1	1	O	TSL
		DOUBLE SLOT	415	800	800SR11	4265	1	1	N	

N - Normal; O - On Order

w.e.f from 1st April 2023

Low Voltage DIN Type, NH Dual Indicator Fuse Links

Rated Voltage 500 Volts AC, Breaking Capacity - 120 kA

500 Vac	Size	Rated Current (A)	Class gL-gG with Dual Indication & Metal Grips	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	000	2	2NHG000B	410	3	3	N
		4	4NHG000B	410	3	3	N
		6	6NHG000B	410	3	3	N
		10	10NHG000B	410	3	3	N
		16	16NHG000B	410	3	3	N
		20	20NHG000B	430	3	3	N
		25	25NHG000B	430	3	3	N
		32	32NHG000B	430	3	3	N
		35	35NHG000B	430	3	3	O
		40	40NHG000B	470	3	3	N
	50	50NHG000B	470	3	3	N	
	63	63NHG000B	470	3	3	N	
	80	80NHG000B	485	3	3	N	
	100	100NHG000B	500	3	3	N	
	00	63	63NHG00B	495	3	3	N
		80	80NHG00B	535	3	3	N
		100	100NHG00B	535	3	3	N
		125	125NHG00B	535	3	3	N
		160	160NHG00B	560	3	3	O
	0 ^o	50	50NHG0B	660	3	3	O
63		63NHG0B	660	3	3	O	
80		80NHG0B	725	3	3	O	
100		100NHG0B	725	3	3	O	
125		125NHG0B	725	3	3	O	
0s	160	160NHG0B	735	3	3	O	
	200	200NHG0SB	770	3	3	O	
	01 ^o	100	100NHG01B	765	3	3	O
		125	125NHG01B	765	3	3	O
		160	160NHG01B	785	3	3	O
	1	200	200NHG1B	825	3	3	N
		224	224NHG1B	825	3	3	O
		250	250NHG1B	870	3	3	N
		315 [#]	315NHG1B [#]	1075	3	3	O
		355	355NHG1B	1100	3	3	O
		02	35	35NHG02B	805	3	3
	40		40NHG02B	845	3	3	O
	50		50NHG02B	845	3	3	O
	63		63NHG02B	845	3	3	O
	80		80NHG02B	870	3	3	O
100	100NHG02B		890	3	3	O	
125	125NHG02B		910	3	3	O	
160	160NHG02B		925	3	3	O	
2	200	200NHG02B	940	3	3	O	
	224	224NHG02B	940	3	3	O	
	250	250NHG02B	965	3	3	O	
	315	315NHG2B	1145	3	3	N	
	355	355NHG2B	1160	3	3	O	
	400	400NHG2B	1175	3	3	N	
03	250	250NHG03B	1535	3	3	O	
	315	315NHG03B	1565	3	3	O	
	355	355NHG03B	1590	3	3	O	
	400	400NHG03B	1655	3	3	O	
3	425	425NHG3B	1680	3	3	O	
	450	450NHG3B	1680	3	3	O	
	500	500NHG3B	1830	3	3	N	
	630	630NHG3B	1940	3	3	N	
	800* [#]	800NHG3B* [#]	2385	3	3	N	

@ Size "0", 6A - 63A on request
 Size "1" 80A-160A on request
 Insulated grip version available on request

N - Normal; O - On Order





Size "01", 6A - 80A on request
[#] Rated Voltage 440V
 500/ 630/ 800/ 1000/ 1250 Amp | 500 V | Size 4 available on request

* Available in Single Indicator type only

w.e.f from 1st April 2023



HRC High Speed Fuses - Semi Conductor Protection Fuses - BS88 Type

Rated Voltage 240 Volts AC, Breaking Capacity - 200 kA

240 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	240	6	6LCT	220	20	20	N	
	240	10	10LCT	220	20	20	N	
	240	12	12LCT	220	20	20	O	
	240	16	16LCT	220	20	20	N	
	240	20	20LCT	220	20	20	N	
		240	25	25LET	400	10	10	N
		240	32	32LET	420	10	10	N
		240	35	35LET	420	10	10	O
		240	50	50LET	440	10	10	N
		240	63	63LET	440	10	10	N
		240	80	80LET	465	10	10	N
		240	100	100LET	465	10	10	O
		240	125	125LET	490	10	10	N
		240	160	160LET	510	10	10	N
		240	180	180LET	540	10	10	N
	240	160	160LMT	810	1	1	N	
	240	200	200LMT	855	1	1	N	
	240	250	250LMT	1045	1	1	N	
	240	315	315LMT	1475	1	1	N	
	240	355	355LMT	1570	1	1	N	
	240	400	400LMT	1660	1	1	N	
	240	450	450LMT	1905	1	1	N	
	240	400	400LMMT	2210	1	1	O	
	240	500	500LMMT	2400	1	1	O	
	240	630	630LMMT	2635	1	1	O	
	240	710	710LMMT	2785	1	1	O	
	240	800	800LMMT	3315	1	1	O	
	240	900	900LMMT	3705	1	1	O	

N - Normal; O - On Order

Rated Voltage 690 Volts AC, Breaking Capacity - 200 kA








690 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	690	6	6CT	225	20	20	N
	690	10	10CT	225	20	20	N
	690	12	12CT	225	20	20	O
	690	16	16CT	245	20	20	N
	690	20	20CT	245	20	20	N
	690	15	15ET	485	10	10	N
	690	25	25ET	485	10	10	N
	690	32	32ET	485	10	10	N
	690	35	35ET	485	10	10	N
	690	40	40ET	485	10	10	N
	690	45	45ET	485	10	10	N
	690	56	56ET	540	10	10	N
	690	63	63ET	540	10	10	N
	690	80	80ET	545	10	10	N

N - Normal; O - On Order

w.e.f from 1st April 2023

HRC High Speed Fuses - Semi Conductor Protection Fuses - BS88 Type


Rated Voltage 690 Volts AC / 240 Volts DC, Breaking Capacity - 200 kA


690 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	690	35	35FE	520	10	10	N	
	690	40	40FE	520	10	10	O	
	690	45	45FE	520	10	10	N	
	690	50	50FE	520	10	10	N	
	690	63	63FE	585	10	10	N	
	690	71	71FE	600	10	10	O	
	690	80	80FE	645	10	10	N	
	690	90	90FE	765	10	10	N	
	690	100	100FE	765	10	10	N	
	690	75	75EET	1160	5	5	O	
	690	90	90EET	1160	5	5	N	
	690	110	110EET	1160	5	5	N	
	690	140	140EET	1160	5	5	N	
	690	160	160EET	1185	5	5	N	
		690	100	100FEE	1215	5	5	N
		690	120	120FEE	1270	5	5	N
690		140	140FEE	1315	5	5	N	
690		160	160FEE	1335	5	5	N	
690		180	180FEE	1365	5	5	O	
690		200	200FEE	1405	5	5	N	
	690	160	160MT	1035	1	1	N	
	690	180	180MT	1080	1	1	N	
	690	200	200MT	1360	1	1	N	
	690	250	250MT	1385	1	1	N	
	690	280	280MT	1490	1	1	N	
	690	315	315MT	1950	1	1	N	
	690	355	355MT	1985	1	1	N	
	690	180	180MMT	1930	1	1	N	
	690	200	200MMT	2025	1	1	N	
	690	225	225MMT	2090	1	1	N	
	690	280	280MMT	2145	1	1	N	
	690	315	315MMT	2140	1	1	N	
	690	355	355MMT	2470	1	1	N	
	690	400	400MMT	2565	1	1	N	
	690	450	450MMT	2765	1	1	N	
	690	500	500MMT	3065	1	1	N	
	690	560	560MMT	3360	1	1	N	
	690	630	630MMT	3485	1	1	N	
	690	710	710MMT	3995	1	1	N	
	690	180	180FM	1080	1	1	O	
	690	200	200FM	1220	1	1	N	
	690	225	225FM	1275	1	1	N	
	690	250	250FM	1290	1	1	N	
	690	280	280FM	1450	1	1	O	
	690	315	315FM	1980	1	1	N	
	690	350	350FM	2055	1	1	N	
		690	400	400FMM	2205	1	1	N
		690	450	450FMM	2300	1	1	N
690		500	500FMM	2595	1	1	N	
690		550	550FMM	2765	1	1	N	
690		630	630FMM	3235	1	1	N	
690		700	700FMM	3565	1	1	N	

N - Normal; O - On Order


w.e.f from 1st April 2023


Accessories

	Catalogue No. / Type	Trip Indicator accessory pack (each consists of 1 pair of clip & appropriate size Trip Indicator Fuse Link)	MRP (₹)	Pack Quantity	Delivery Class
	EC-250	For use with LET	1005	1 set	O
	EC-600	For use with ET, EET, FE & FEE	1080	1 set	O
	MC-250	For use with LMT & LMMT	1005	1 set	O
	MC-600	For use with FM & FMM	1080	1 set	O
	MC-700	For use with MT & MMT	1130	1 set	O

	Catalogue No. / Type	Micro - Switch	MRP (₹)	Pack Quantity	Delivery Class
	MAI	Micro-switch & Adapter assly.	1310	1	O
	MBI	Micro-switch & Adapter assly.	#	1	O

- Price Available on request


	Catalogue No. / Type	Fuse Clips for Fitting Trip Indicator	MRP (₹)	Pack Quantity	Delivery Class
	ECLIP	For use with LET, ET, EET, FE & FEE	170	10	O
	MCLIP	For use with LMT, LMM T, MT, MM T, FM & FMM	375	10	O
	CL1	Back connected Clip for use with Trip Indicator fuse	1260	1 set	O

	Catalogue No. / Type	Trip Indicators for Fuse Links	MRP (₹)	Pack Quantity	Delivery Class
	TI250-BT	For use with LET, LMT & LMMT	985	10	O
	TI500-BT	For use with ET, EET, FE & FEE, FM & FMM	1010	1	O
	TI600-BT	For use with ET, EET, FE & FEE, FM & FMM	1060	1	O
	TI700-BT	For use with MT & MMT	1260	1	O
	TI1100-BT	For replacement only	1405	1	O
	TI1500-BT	For replacement only	1450	1	O
	TI2000-BT	For replacement only	1595	1	O

- Price Available on request

N - Normal; O - On Order

NH Fuse base

	Catalogue No. / Type	Fuse Accessories	MRP (₹)	Pack Quantity	Delivery Class
	SD1-S	NH Fuse base 250A, 690VAC DIN Size 1 (Screw Mounting)	1010	3	O
	SD2-S	NH Fuse base 400A, 690VAC DIN Size 2 (Screw Mounting)	1490	3	O
	SD3-S	NH Fuse base 630A, 690VAC DIN Size 3 (Screw Mounting)	2160	3	O
	SD4-S	NH Fuse base 1250A, 690VAC DIN Size 4 (Screw Mounting)	5185	1	O

N - Normal; O - On Order

w.e.f from 1st April 2023

British Standard Type Range of Fuses for use in Air.

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	Air (Bus Duct / Distribution)	3.3 / 3.6	25	15	3.6ADGHC15	4090	1	1	O
		3.3 / 3.6	25	20	3.6ADGHC20	4090	1	1	O
		3.3 / 3.6	25	25	3.6ADGHC25	4090	1	1	O
		3.3 / 3.6	25	30	3.6ADGHC30	4090	1	1	O
		3.3 / 3.6	25	40	3.6ADGHC40	4090	1	1	O
		3.3 / 3.6	25	45	3.6ADGHC45	4090	1	1	O
		3.3 / 3.6	25	50	3.6ADGHC50	4090	1	1	O
		3.3 / 3.6	25	60	3.6ADGHC60	4090	1	1	O
		3.3 / 3.6	25	70	3.6ADGHC70	4090	1	1	O
		3.3 / 3.6	25	75	3.6ADGHC75	4530	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	10	7.2BDGHC10	4135	1	1	O
		6.6 / 7.2	40	16	7.2BDGHC16	4135	1	1	O
		6.6 / 7.2	40	20	7.2BDGHC20	4135	1	1	O
		6.6 / 7.2	40	25	7.2BDGHC25	4135	1	1	O
		6.6 / 7.2	40	31.5	7.2BDGHC31.5	4135	1	1	O
		6.6 / 7.2	40	35.5	7.2BDGHC35.5	4135	1	1	O
		6.6 / 7.2	40	40	7.2BDGHC40	4135	1	1	O
		6.6 / 7.2	40	45	7.2BDGHC45	4210	1	1	O
		6.6 / 7.2	40	50	7.2BDGHC50	4210	1	1	O
		6.6 / 7.2	40	56	7.2BDGHC56	4210	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	60	7.2BDGHC60	4210	1	1	O
		6.6 / 7.2	40	63	7.2BDGHC63	4480	1	1	O
		6.6 / 7.2	40	71	7.2BDGHC71	4510	1	1	O
		6.6 / 7.2	40	80	7.2BDGHC80	4510	1	1	O
		6.6 / 7.2	40	50	7.2AHGHC50	5055	1	1	O
		6.6 / 7.2	40	60	7.2AHGHC60	5150	1	1	O
		6.6 / 7.2	40	75	7.2AHGHC75	5425	1	1	O
		6.6 / 7.2	40	90	7.2AHGHC90	5730	1	1	O
		6.6 / 7.2	40	100	7.2AHGHC100	5760	1	1	O
		6.6 / 7.2	40	112	7.2AHGHC112	6685	1	1	O
Air (Bus Duct / Distribution)	6.6 / 7.2	40	125	7.2AHGHC125	6945	1	1	O	
	6.6 / 7.2	40	140	7.2AHGHC140	7575	1	1	O	
	6.6 / 7.2	40	150	7.2AHGHC150	7575	1	1	O	
	6.6 / 7.2	40	160	7.2AHGHC160	7790	1	1	N	
	6.6 / 7.2	40	160	7.2AHGNB160 (NS)	7255	1	1	O	
	6.6 / 7.2	40	50	7.2AHGHB50	4980	1	1	O	
	6.6 / 7.2	40	60	7.2AHGHB60	4980	1	1	O	
	6.6 / 7.2	40	65	7.2AHGHB65	5245	1	1	O	
	6.6 / 7.2	40	75	7.2AHGHB75	5305	1	1	O	
	6.6 / 7.2	40	90	7.2AHGHB90	5550	1	1	N	
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	100	7.2AHGHB100	5575	1	1	O
		6.6 / 7.2	40	112	7.2AHGHB112	6475	1	1	O
		6.6 / 7.2	40	120	7.2AHGHB120	6735	1	1	O
		6.6 / 7.2	40	125	7.2AHGHB125	6735	1	1	O
		6.6 / 7.2	40	140	7.2AHGHB140	7355	1	1	O
		6.6 / 7.2	40	150	7.2AHGHB150	7355	1	1	O
		6.6 / 7.2	40	160	7.2AHGHB160	7355	1	1	O
		6.6 / 7.2	20	30	7.2AEFMO 30	5180	1	1	O
		6.6 / 7.2	20	35	7.2AEFMO 35	5180	1	1	O
		6.6 / 7.2	20	40	7.2AEFMO 40	5180	1	1	O
6.6 / 7.2	20	50	7.2AEFMO 50	5235	1	1	O		
6.6 / 7.2	20	56	7.2AEFMO 56	5235	1	1	O		
6.6 / 7.2	20	63	7.2AEFMO 63	5235	1	1	O		
6.6 / 7.2	20	71	7.2AEFMO 71	5260	1	1	O		
6.6 / 7.2	20	80	7.2AEFMO 80	5260	1	1	O		
6.6 / 7.2	20	90	7.2AEFMO 90	5370	1	1	O		

(#) Available on request
(NS) Non striker


N - Normal; O - On Order

For ordering HV Air Fuse with Single Slot9

- 1 - For BD _____ series, add "S" at the end of the cat. number. For ex : For ordering 100A, 7.2BFGHD catalogue no. will be "7.2BFGHD100S"
- 2 - For AH _____ series, replace "C" at end with "B" For ex : For ordering 100A, 7.2AHGH series, catalogue no. will be "7.2AHGHB100"
- 3 - For "7.2BFGHD" ___ series, completely replaced with "7.2AHGHB".

w.e.f from 1st April 2023

British Standard Type Range of Fuses for use in Air.

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
		11 / 12	40	6.3	12BDGHC6.3	4865	1	1	O
		11 / 12	40	10	12BDGHC10	4865	1	1	O
		11 / 12	40	16	12BDGHC16	4865	1	1	O
		11 / 12	40	20	12BDGHC20	4610	1	1	O
		11 / 12	40	25	12BDGHC25	4450	1	1	N
		11 / 12	40	31.5	12BDGHC31.5	4480	1	1	O
		11 / 12	40	35.5	12BDGHC35.5	4480	1	1	O
		11 / 12	40	40	12BDGHC40	4510	1	1	O
		11 / 12	40	45	12BDGHC45	4510	1	1	O
		11 / 12	40	50	12BDGHC50	4545	1	1	O
	Air (Bus Duct/ Distribution)	11 / 12	40	56	12AHGHC56	5205	1	1	O
		11 / 12	40	63	12AHGHC63	5205	1	1	N
		11 / 12	40	70	12AHGHC70	5270	1	1	O
		11 / 12	40	80	12AHGHC80	5705	1	1	N
		11 / 12	40	90	12AHGHC90	5660	1	1	O
		11 / 12	40	100	12AHGHC100	5705	1	1	O
		11 / 12	40	56	12AHGHB56	5230	1	1	O
		11 / 12	40	63	12AHGHB63	5275	1	1	N
		11 / 12	40	65	12AHGHB65	5490	1	1	O
		11 / 12	40	70	12AHGHB70	5490	1	1	N
		11 / 12	40	80	12AHGHB80	5745	1	1	O
		11 / 12	40	90	12AHGHB90	5860	1	1	O
		11 / 12	40	100	12AHGHB100	5860	1	1	N
		11 / 12	40	112	12AKGHD112	13295	3	3	O
		11 / 12	40	125	12AKGHD125	13390	1	1	O
		11 / 12	20	3.7	12AEFMO 3.7	5220	1	1	O
		11 / 12	20	12	12AEFMO 12	5165	1	1	O
		11 / 12	20	15	12AEFMO 15	5165	1	1	O
		11 / 12	20	16.8	12AEFMO 16.8	5165	1	1	O
		11 / 12	20	22	12AEFMO 22	5200	1	1	O
11 / 12	20	26.6	12AEFMO 26.6	5200	1	1	O		
11 / 12	20	30	12AEFMO 30	5200	1	1	O		
11/12	20	33.75	12AEFMO 33.75	5200	1	1	O		
11 / 12	20	37.5	12AEFMO 37.5	5200	1	1	O		
11 / 12	20	42	12AEFMO 42	5250	1	1	O		
11 / 12	20	47.25	12AEFMO 47.25	5250	1	1	O		



(#) Available on request

N - Normal; O - On Order

For ordering HV Air Fuse with Single Slot -
1 - For "12BFGHD" ___ series, completely replaced with "12AHGHB".




w.e.f from 1st April 2023

For use in Oil

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	Oil	6.6 / 7.2	45	100	7.2OEFMA100	4725	1	1	O
	Oil	11 / 12	40	6.3	12OEFMA6.3	5140	3	3	O
		11 / 12	40	10	12OEFMA10	5680	3	3	O
		11 / 12	40	16	12OEFMA16	5680	3	3	O
		11 / 12	40	20	12OEFMA20	5695	3	3	O
		11 / 12	40	25	12OEFMA25	5695	3	3	O
		11 / 12	40	31.5	12OEFMA31.5	5695	3	3	O
		11 / 12	40	40	12OEFMA40	5710	3	3	O
		11 / 12	40	50	12OEFMA50	5710	3	3	O
		11 / 12	40	63	12OEFMA63	5710	3	3	O
11 / 12		40	71	12OHFMA71	5905	3	3	O	
11 / 12		40	80	12OHFMA80	5905	3	3	O	
		11 / 12	40	16	12OHGMA16	6935	3	3	O
		11 / 12	40	25	12OHGMA25	6970	3	3	O
		11 / 12	40	31.5	12OHGMA31.5	6970	3	3	O
		11 / 12	40	40	12OHGMA40	7010	3	3	O
		11 / 12	40	50	12OHGMA50	7010	3	3	O
		11 / 12	40	63	12OHGMA63	7010	3	3	O
		11 / 12	40	80	12OHGMA80	7010	3	3	O
		11 / 12	40	90	12OHGMA90	7275	3	3	O
	11 / 12	40	100	12OHGMA100	7950	3	3	O	
	11 / 12	40	125	12OLGMA125	8935	3	3	O	

N - Normal; O - On Order

For use in PT / VT & Auxiliary Transformer

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNA3.15	1030	1	1	N
		3.3 / 3.6	50	6.3	3.6ABWNA6.3	1030	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNA3.15	1125	1	1	N
		6.6 / 7.2	45	6.3	7.2ABCNA6.3	1125	1	1	O
		6.6 / 7.2	45	3.15	7.2ABWNA3.15	1110	1	1	O
		6.6 / 7.2	45	6.3	7.2ABWNA6.3	1110	1	1	O
		11 / 12	45	3.15	12ABCNA3.15	1135	1	1	N
		22 / 24	25	3.15	24ABGNA3.15	2600	1	1	N
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNS3.15	1110	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNS3.15	1225	1	1	O
		11 / 12	45	3.15	12ABCNS3.15	1320	1	1	O
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNT3.15	1260	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNT3.15	1155	1	1	O
		11 / 12	45	3.15	12ABCNT3.15	1335	1	1	O

N - Normal; O - On Order

w.e.f from 1st April 2023

British Standard Type Range of Fuses for use in Motor Circuits

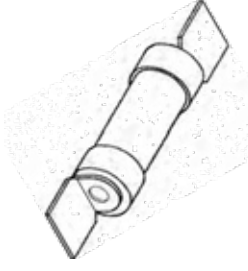
	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	For use in MV Motor Circuits	3.6	50	5	3.6WDOHS5	4535	1	1	O
		3.6	50	16	3.6WDOHS16	4535	1	1	O
		3.6	50	20	3.6WDOHS20	4535	1	1	N
		3.6	50	25	3.6WDOHS25	4535	1	1	O
		3.6	50	32	3.6WDOHS32	4490	1	1	N
		3.6	50	40	3.6WDOHS40	4490	1	1	O
		3.6	50	50	3.6WDOHS50	4540	1	1	O
		3.6	50	63	3.6WDOHS63	4580	1	1	N
		3.6	50	80	3.6WDOHS80	4580	1	1	O
		3.6	50	50	3.6WDFMO50	6440	1	1	O
		3.6	50	63	3.6WDFMO63	6625	1	1	O
		3.6	50	80	3.6WDFMO80	6625	1	1	O
		3.6	50	100	3.6WDFMO100	6625	1	1	O
		3.6	50	100	3.6WFFMO100	8305	1	1	O
		3.6	50	140	3.6WFFMO140	9260	1	1	O
		3.6	50	160	3.6WFFMO160	9520	1	1	O
		3.6	50	200	3.6WFFMO200	10315	1	1	N
		3.6	50	250	3.6WFFMO250	11690	1	1	O
		3.6	50	315	3.6WFFMO315	13505	1	1	O
3.6	50	350	3.6WFFMO350	14945	1	1	O		
3.6	50	450	3.6WFFMO450	22470	1	1	O		
3.6	50	630	3.6WKFMO630	28805	1	1	O		
	For use in MV Motor Circuits	7.2	45	50	7.2WFNMO50	9245	1	1	O
		7.2	45	63	7.2WFNMO63	9245	1	1	O
		7.2	45	80	7.2WFNMO80	10920	1	1	O
		7.2	45	100	7.2WFNMO100	10920	1	1	O
		7.2	45	125	7.2WFNMO125	12625	1	1	O
		7.2	45	160	7.2WFNMO160	12745	1	1	O
		7.2	45	200	7.2WFNMO200	14590	1	1	O
		7.2	45	250	7.2WFNMO250	17250	1	1	O
		7.2	45	50	7.2WFQMO50	10075	1	1	N
		7.2	45	63	7.2WFQMO63	10170	1	1	N
		7.2	45	80	7.2WFQMO80	11265	1	1	N
		7.2	45	100	7.2WFQMO100	11960	1	1	N
		7.2	45	125	7.2WFQMO125	13950	1	1	N
		7.2	45	160	7.2WFQMO160	14075	1	1	O
		7.2	45	200	7.2WFQMO200	15875	1	1	O
		7.2	45	250	7.2WFQMO250	19665	1	1	O
		7.2	45	350	7.2WKQMO350	26560	1	1	O
		7.2	45	400	7.2WKQMO400	44750	1	1	O

N - Normal; O - On Order

w.e.f from 1st April 2023

BS Fuse link Type SS/NS/ES


Clip-on Fuse links with Staggered Tags-415 V AC

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	E1	SMALL CLIP ON	415	2	SS2	85	20	20	O	
		TAG	415	4	SS4	85	20	20	N	
				415	6	SS6	85	20	20	N
				415	10	SS10	85	20	20	O
				415	16	SS16	90	20	20	O
				415	20	SS20	90	20	20	O
	F1	CLIP ON	415	2	NS2	125	20	20	N	
		TAG	415	4	NS4	125	20	20	N	
			415	6	NS6	125	20	20	N	
			415	10	NS10	125	20	20	N	
			415	16	NS16	125	20	20	N	
			415	20	NS20	150	20	20	N	
			415	25	NS25	150	20	20	N	
			415	32	NS32	150	20	20	N	
	F2	LONG CLIP ON	415	2	ES2	120	20	20	O	
		TAG	415	4	ES4	120	20	20	O	
			415	6	ES6	120	20	20	O	
			415	10	ES10	120	20	20	O	
			415	16	ES16	120	20	20	O	
			415	20	ES20	120	20	20	O	
			415	25	ES25	125	20	20	O	
		415	32	ES32	125	20	20	O		
		415	36	ES36	125	20	20	O		
		415	50	ES50	170	20	20	N		
	415	63	ES63	175	20	20	N			

N - Normal; O - On Order

BS Fuse link Type EIT.

Fuse link with Offset Tags



415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
		OFFSET TAG	415	2	EIT2	140	20	20	O
		OPEN SLOT	415	4	EIT4	140	20	20	O
			415	6	EIT6	140	20	20	N
			415	10	EIT10	140	20	20	N
			415	16	EIT16	140	20	20	N
			415	20	EIT20	145	20	20	N
			415	25	EIT25	145	20	20	N
			415	32	EIT32	145	20	20	N
			415	36	EIT36	170	20	20	O
			415	50	EIT50	170	20	20	O
			415	63	EIT63	175	20	20	N

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

w.e.f from 1st April 2023


Fuse link with Offset Tags Closed Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFFSET TAG	415	6	TSA6	150	20	20	O	AAO
		CLOSED SLOT	415	10	TSA10	150	20	20	O	
			415	16	TSA16	150	20	20	N	
			415	20	TSA20	150	20	20	O	
			415	25	TSA25	150	20	20	N	
			415	32	TSA32	150	20	20	N	
	A3	OFFSET TAG	415	36	TSS36	175	20	20	N	BAO
		CLOSED SLOT	415	50	TSS50	310	20	20	N	
			415	63	TSS63	310	20	20	N	
	-	OFFSET TAG	415	80	TSDS80	440	10	10	N	OSD
		CLOSED SLOT	415	100	TSDS100	440	10	10	N	
			415	125	TSDS125	440	10	10	N	
	A4		415	125	TSD125	720	10	10	N	CEO
	-	OFFSET TAG	415	125	TSFP125	720	10	10	O	DEO
		CLOSED SLOT	415	160	TSFP160	720	10	10	N	
		415	200	TSFP200	720	10	10	O		

N - Normal; O - On Order

Type - TSDC \ TSK \ TSMS \ TSTS \ TSL

Fuse Links with Centre Tag Single Slot


415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	B3	Centre Tag	415	250	TSK250	1355	10	10	N	ED
		Single Slot	415	315	TSK315	1355	10	10	N	
	-	Centre Tag	415	450	TSTS450	2220	1	1	O	SN11(S)
		Single Slot	415	500	TSTS500	2220	1	1	O	SP11(S)
	-	Centre Tag	415	560	TSL560	3585	1	1	O	
		Single Slot	415	630	TSL5630	3585	1	1	O	
			415	710	TSL5710	3340	1	1	O	SR11(S)
			415	750	TSL5750	3355	1	1	O	
		415	800	TSL5800	5175	1	1	N		

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

w.e.f from 1st April 2023


Fuse link with Offset Tags Double Slot.

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	415	355	TSM355	2375	1	1	O	EF
		Double Slot	415	400	TSM400	2375	1	1	O	
	C2	Centre Tag	415	450	TST450	1965	1	1	O	FF
		Double Slot	415	500	TST500	3745	1	1	O	
	C3	Centre Tag	415	560	TSL560	3585	1	1	O	SR11
		Double Slot	415	630	TSL630	3695	1	1	N	
			415	710	TSL710	3695	1	1	O	
			415	750	TSL750	3700	1	1	O	
		415	800	TSL800	3915	1	1	N		

N - Normal; O - On Order

Type - TM \ TTM \ TLM


Fuse Links with Centre Tags Double Slot

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	660	355	TM355	2235	1	1	O	SP11
		Double Slot	660	400	TM400	2315	1	1	O	
	C2	Centre Tag	660	450	TTM450	2605	1	1	O	R11
		Double Slot	660	500	TTM500	2715	1	1	O	
			660	560	TTM560	3040	1	1	O	
	C3	Centre Tag	660	630	TLM630	5650	1	1	O	GF
		Double Slot	660	710	TLM710	5650	1	1	O	
			660	750 & 800	TLM750 & 800	5650	1	1	O	

N - Normal; O - On Order

Type TIA \ TIS \ TCP \ TFP


Fuse with Offset Tags (2 hole fixing - Bolted)

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFFSET TAG	660	2	TIA2	150	10	10	O	HO7
		CLOSED SLOT	660	4	TIA4	150	10	10	O	
			660	6	TIA6	180	10	10	N	
			660	10	TIA10	180	10	10	N	
			660	16	TIA16	180	10	10	N	
			660	20	TIA20	180	10	10	N	
			660	25	TIA25	180	10	10	N	
	A3	OFFSET TAG	660	36	TIS36	235	10	10	N	KO7
		CLOSED SLOT	660	40	TIS40	310	10	10	O	
			660	50	TIS50	260	10	10	N	
			660	63	TIS63	260	10	10	N	
	A4	OFFSET TAG	660	80	TCP80	725	6	6	N	L14
		CLOSED SLOT	660	100	TCP100	725	6	6	N	
			660	125	TFP125	1150	3	3	O	M14
			660	160	TFP160	1150	3	3	O	
			660	200	TFP200	1150	3	3	O	

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

w.e.f from 1st April 2023

Fuse with Central Tags

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	CENTRE TAG	660	80	TC80	775	6	6	O	LO9
		SINGLE SLOT	660	100	TC100	775	6	6	N	
			660	80	102TC80	485	6	6	O	
			660	100	102TC100	540	6	6	O	
	B3	CENTRE TAG	660	250	TKF250	1725	1	1	N	NO9
		SINGLE SLOT	660	315	TKF315	1725	1	1	N	

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit

Type - SC (Safe Clip)

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
E1	-	Front	SS	20	SC20H	415	295	10	10	O
F1	-	Front	NS	32	SC32H	415	-	10	10	O

N - Normal; O - On Order

Fuse Fittings for LV BS Type of Fuses

Type - NS & SM: Moulded Fuse Holder

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Carton Qty.	MOQ	Delivery Class
F1		Front	NS (upto 32A)	32	NSH32	415	295	10	10	N
		Back	NS (upto 32A)	32	NSP32	415	280	10	10	N
		Busbar	NS (upto 32A)	32	NSB32	415	245	10	10	N
A2	Offset Bolted	Front	TIA / TSA	32	SM32H	660	435	10	10	N
		Busbar	TIA / TSA	32	SM32B	660	555	10	10	N
A3	Offset Bolted	Front	TIA / TSS	63	SM63H	660	570	10	10	N
		Busbar	TIA / TSS	63	SM63B	660	640	10	10	N
A4	Offset Bolted	Front	TCP / TSD	125	SM125H	660	1440	5	10	N
		Busbar	TCP / TSD	125	SM125B	660	1585	5	10	N

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order


Type GSMJ/GSMK/SMK Ultra-fast Acting Multi Body Fuselink for

Fuselink for Diode & Thyristor Protection

800 \ 1000 Vac	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class	
	800	63	GSMJ63	1155	3	3	O	
	800	120	GSMJ120	2680	1	1	O	
	800	180	GSMJ180	4025	2	2	O	
	800	240	GSMJ240	5245	1	1	O	
	800	300	GSMJ300	6005	1	1	O	
	800	350	GSMJ350	7900	1	1	O	
	800	400	GSMJ400	9270	1	1	O	
	800	460	GSMJ460	10185	1	1	O	
	800	520	GSMJ520	11275	1	1	O	
	800	580	GSMJ580	13510	1	1	O	
	800	630	GSMJ630	15110	1	1	O	
	800	680	GSMJ680	16705	1	1	O	
	800	800	GSMJ800	21520	1	1	O	
	800	1000	GSMJ1000	26910	1	1	O	
	800	1200	GSMJ1200	30680	1	1	O	
		1000	63	GSMK63	585	3	3	O
		1000	120	GSMK120	2815	2	2	O
		1000	180	GSMK180	4120	2	2	O
1000		240	GSMK240	5895	1	1	O	
1000		300	GSMK300	6760	2	2	O	
1000		350	GSMK350	8360	2	2	O	
1000		400	GSMK400	10075	1	1	O	
1000		460	GSMK460	11210	1	1	O	
1000		520	GSMK520	13625	1	1	O	
1000		580	GSMK580	14650	1	1	O	
1000		630	GSMK630	16375	1	1	O	
1000		680	GSMK680	17975	1	1	O	
1000		800	GSMK800	21930	1	1	O	
1000		1000	GSMK1000	-	1	1	O	
1000		1200	GSMK1200	34795	1	1	O	
-		2000	SMK-GSM120-1200	570	1	1	O	
-		400	954GSMJ400	10470	1	1	O	
1000		500	RG5500	8520	1	1	O	

N - Normal; O - On Order

Trip Indicator Fuse

	Cat. No. / Type	Rated Voltage (Volts)	MRP (₹)	Pack Qty.	MOQ	Delivery Class
	TI300-BI	300	645	20	20	N
	TI600-BI	600	680	20	20	N
	TI1200-BI	1200	690	20	20	N
	TI2000-BI	2000	780	20	20	N

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

w.e.f from 1st April 2023

British Standard Type Range of Fuses for use in Motor Circuits

3.6 / 7.2 KV	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	MRP (₹)	Carton Qty.	MOQ	Delivery Class
	3.6	5	K3PGX5	6110	1	1	O
	3.6	10	K3PGX10	6110	1	1	O
	3.6	16	K3PGX16	6110	1	1	O
	3.6	20	K3PGX20	6110	1	1	O
	3.6	25	K3PGX25	6110	1	1	O
	3.6	32	K3PGX32	6110	1	1	O
	3.6	40	K3PGX40	6110	1	1	O
	3.6	50	K3PGX50	6230	1	1	O
	3.6	63	K3PGX63	6245	1	1	O
	3.6	80	K3PGX80	6245	1	1	O
	3.6	100	K81PEX100	10635	1	1	O
	3.6	160	K81PEX160	11930	1	1	N
	3.6	200	K81PEX200	13460	1	1	O
	3.6	250	K81PEX250	15445	1	1	N
	3.6	315	K81PEX315	18670	1	1	O
	3.6	350	K81PEX350	21545	1	1	N
	7.2	50	K81SVX50	13190	1	1	O
	7.2	63	K81SVX63	13315	1	1	N
	7.2	80	K81SVX80	14510	1	1	N
	7.2	100	K81SVX100	16670	1	1	N
	7.2	125	K81SVX125	18325	1	1	N
	7.2	160	K81SVX160	18665	1	1	O
	7.2	200	K81SVX200	21790	1	1	O
	7.2	250	K81SVX250	26765	1	1	O
	7.2	50	KSVX50	13945	1	1	O
7.2	63	KSVX63	13945	1	1	O	
7.2	80	KSVX80	14220	1	1	O	
7.2	100	KSVX100	14345	1	1	O	
7.2	125	KSVX125	14480	1	1	O	
7.2	160	KSVX160	16390	1	1	O	
7.2	200	KSVX200	18670	1	1	O	
7.2	250	KSVX250	21340	1	1	O	

Note: Please discuss with Eaton sales team before placing any orders for these set of products.

N - Normal; O - On Order

w.e.f from 1st April 2023

Cross Reference Chart

LV BUS FUSES

Clip on Type

BS Size	Bussmann	Bussmann
E1	SSD	SS
F1	NSD	NS
F2	ESD	ES

Bolted Type - 550V Range

BS Size	Bussmann	Bussmann*
A1	NITD	NIT
A2	AAO	TSA
A3	BAO*	TSS
A4	CEO	TSD
-	OSD	TSDS
C2	FF	TST
C3	GF	TLM
-	GG	TLT

*Fuses are 415V rated

LV NH DIN FUSES

BS Size	Bussmann	Bussmann	Brand 2	Brand 3
400 / 415 Volts				
SIZECOO/000	NHG000B-400	NA	NA	
SIZE 00	NHG00B-400	NA	NA	HN SIZE00
SIZE 1	NHG01-400 / NHG1-40	NA	NA	HN SIZE1
SIZE 2	NHG02-400 / NHG2-40	NA	NA	HN SIZE2
SIZE 3	NHG03-400 / NHG3-40	NA	NA	HN SIZE3
500 Volts				
SIZECOO/000	NHG000B	VSA	3NA38	NA
SIZE 00	NHG00B	VSB	3NA10	NA
SIZE 1	NHG01 / NHG1	VSF	3NA12	NA
SIZE 2	NHG02 / NHG2	VSK	3NA13	NA
SIZE 3	NHG03 / NHG3	VST	3NA14	NA
660 / 690 Volts				
SIZE 00	NHG00B-690	NA	NA	NA
SIZE 1	NH1G-690	NA	NA	NA
SIZE 2	NH2G-690	NA	NA	NA
SIZE 3	NH3G-690	NA	NA	NA

Bolted Type - 660V Range

BS Size	Bussmann	Bussmann
A2	HO7-660	NIT
A3	KO7-660	TSA
A4	L14-660	TSS
-	M14-660	TSD
B1	LO9-660	TSDS
B2	MO9-660	TST
B3	NO9-660	TLM
B4	PO9-660	TLT
C1	P11-660	TLM
C2	R11-660	TLT

Bolted Type - 415V Range

BS Size	Bussmann	Bussmann
-	EITD	EIT
-	DEO	TSFP
B1	CD	TSDC
B2	DD	TSF
B3	ED	TSF/TSK
B4	ED	TSK/TSM
-	SN11 (S)	TSMS
-	SP11 (S)	TSTS
-	SR11 (S)	TSLS
C1	EF	TSM
-	SR11	TSL

LV NH DIN BASES

Suitable for size	Bussmann		Bussmann	Brand 2	Brand 3
	TYPE	AMPS			
C00/000/00	SB 00 - PB	160	SD00 - D	3NH3030 / 3032	HB160
01/1	SD 1 - S	250	SD1 - D	3NH3230	HB250
02/2	SD 2 - S	400	SD2 - D	3NH3330	HB800
03/3	SD 3 - S	630	SD3 - D	3NH3430	HB800

HIGHSPEED BS88 FUSES

BS Size		Bussmann		Brand 4	
TYPE	RANGE	TYPE	RANGE	TYPE	RANGE
240 Volts Range					
LCT	6-20	GSA	5-20	2.5URE	6-20
LET	25-180	GSA	25-100	2.5URGS/URZ	25-180
LMT	160-450	GS450	150-200	2.5URGG	150-200
LMT	160-450	GS450	300-500	2.5URGH	300-500
LMMT	400-900	-	-	-	-
690 Volts Range					
CT	6-20	GSB	5-20	6.6URE	6-20
ET	25-80	GSB	25-75	6.6URS	25-75
ET	25-80	GSG1000	16-55	6.6URS	16-55
EET	90-160	GSG1000	75-150	6.6URT	75-140
FM	180-350	GS1000	100-200	6.6URGL/UR	100-250
MT	160-355	GS1000	100-200	6.6URGL/UR	100-250
MMT	180-710	GS1000	300-500	-	-
MMT	180-710	GSG1000	175-350	6.6URGM/URU	175-350

LV BS88 BASES

BS SIZE	Bussmann			Bussmann	Brand 2	Brand 3
	FUSE TYPES	TYPE	AMPS			
Old Type						
F1	NSD/FO6	FA	32	NSH	NA	HD32H
F1	NSD/FO6	FB	32	NSP	NA	HD32P
F1	NSD/FO6	FD	32	NSB	NA	HD32B
A2	HO7 / AAO / FO7	HA	32	SM32H	NA	HK32H
A2	HO7 / AAO / FO7	HD	32	SM32B	NA	HK32B
A3	TO7 / BAO / KO7	KA	63	SM63H	NA	HK63H
A3	TO7 / BAO / KO7	KD	63	SM63B	NA	HK63B
A4	L14 / CEO / DEO@ / M14@ / KL14	LA	125	SM125H	NA	HK125H
A4	L14 / CEO / DEO@ / M14@ / KL14	LD	125	SM125B	NA	HK125B
New Safeloc Type						
F1	NSD / FO6	NNSF	32	SC32H	3NW 32	NA
					NNSF	
F2	ESD	ENSF	63	SC63H	NA	NA
New Range - Cam Master						
A2	HO7 / AAO / FO7	CM32F	32		3NW CM32F9	NA
A3	TO7 / BAO / KO7	CM63F	63		3NW CM63F9	NA
	OSD	CM100F	100		3NW CM100F9	NA

@ - Upto 125A only

HV FUSES

Appl. used in	Bussmann	Bussmann
Air	ADGHC	H2CAS
Air	ADOH6 / ADOH7	K3PGX
Air	BFGHD	H2CAS
Air	BDGHC	H2CAS
Air	AHGHC	H2CAS
Oil	OHGMA/OLGMA	KEMXO
Oil	OEFMA/OHFMA	KEBXO
VT/PT	ABWNA	VTF
VT/PT	ABCNA	VTF

Appl. used in	Bussmann	Bussmann
VT/PT	ABCNS	5xVTF
Motor Ckt.	WDOHS	K3PGX
Motor Ckt.	WDFMO/ WFFMO	K81PEX/ K81PRX
Motor Ckt.	WKFMO	K82PEX
Motor Ckt.	WFQMO	K81SVX/ K81SRX
Motor Ckt.	WKQMO	K82SSX

- ❖ The chart is intended for guidance purpose only, considering physical replaceability
- ❖ In identical operating condition, Bussmann fuse can be used to achieve similar performance
- ❖ Other makes may not necessarily have identical performance. Relevant data like rated voltage, breaking capacity, let thru' current, etc. also need to be evaluated while evaluating fuse performance

w.e.f from 1st April 2023



State-of-the-art manufacturing facility, Pondicherry

America | Europe | Middle East | Africa | Asia Pacific

Electrical standards and certifications



PRICE :

- For items marked (#), prices available on request.
- Prices are subject to change without prior notice.
- This Price list supersedes all previous Price Lists.
- Price prevailing at the time of dispatch will only be applicable.
- For prices of any special products not listed here, please contact us
- Prices are Ex-Pondicherry, exclusive of packing, forwarding, freight & insurance.
- Company reserves the right to issue amendments which may arise due to any errors in the Price List

TAXES AND DUTIES :

- All prices in this document are inclusive of GST.
- Order Postponement or cancellation is not allowed.
- For all shipments, orders to be in multiples of the carton quantity.
- All prices are in Rupees (₹) per individual item unless stated otherwise.

This price list is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products or discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this price list. Once a product has been selected, it should be tested by the user in all possible applications. The information contained in this price list is correct at the time of publication, but we reserve the right to supply products differing in construction or performance.

For more information, please reach out to our Eaton sales representative.

w.e.f from 1st April 2023



Powering Business Worldwide

India Head Office

Eaton Power Quality Pvt. Ltd.
2, EVR Street, Sedarpet
Industrial Estate
Pondicherry - 605111
Tel: +91 413 2672000
Enquiries - eatonelectricalindia@eaton.com

Branch Offices

Mumbai

Eaton Power Quality Pvt. Ltd.
Unit No. 101 & 102 "A" Wing,
1st floor, 215 Atrium, Andheri
- Kurla Road, Andheri (East)
Mumbai - 400093
Mob - 8754278882 / 9833014167

Bangalore

4th Floor, Prestige Atrium, Central
Street, Bangalore, India - 560001
Tel: +91 80 49012200
Mob - 9916514234 / 8754378882

Chennai

No. 334, Futura Tech Park, Block B,
1st floor, Rajiv Gandhi Salai,
Sholinganallur, Chennai - 600119
Mob - 7358110211

Pune

145, Off. Mumbai - Pune Road,
Pimpri, Pune - 411018
Mob: 9320141508 / 9819949882

Delhi

Unit A1 & B1, 3rd Floor, TDI Centre,
Plot No. 7, Jasola, New Delhi - 110025
Tel: +91 11 45851800
Mob - 8754268882 / 9811086586

Hyderabad

Mob - 9533423461

Coimbatore

Mob - 9344893165

Indore

Mob - 9501177119

Ahmedabad

Mob - 8754298882

Vadodara

Mob - 9879355485

Chandigarh

Mob - 8754348882 / 9501177119

Customer Care Center:

Toll free number: 1800 425 5758, 1800 102 4620

Emergency number: 893 922 2522

Email: eatonelectricalindia@eaton.com

helpdeskelectrical@eaton.com