

EMI RFI FILTERS



B01 PACKAGE

Rated Current	: 1A, 3A, 6A, 10A
Rated Voltage	: 120/250VAC
Mounting	: Panel mounting
Operating Temperature	: 40°C/-25° +85°C
Inlet	: C14
Output terminals	: Faston 6.3 x 0.8 / solder tab
Reference Standard	: EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
Compliance Marking	: CE, RoHS
Approvals	: cCSAus



PANEL MOUNTING SINGLE STAGE



B02 PACKAGE

Rated Current	: 1A, 3A, 6A, 10A
Rated Voltage	: 120/250VAC
Mounting	: Panel mounting
Operating Temperature	: 40°C/-25° +85°C
Inlet	: C14
Output terminals	: Faston 6.3 x 0.8 / solder tab
Reference Standard	: EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
Compliance Marking	: CE, RoHS
Approvals	: cCSAus

B03 PACKAGE

Rated Current	: 1A, 3A, 6A, 10A
Rated Voltage	: 120/250VAC
Mounting	: Panel mounting
Operating Temperature	: 40°C/-25° +85°C
Inlet	: C14
Output terminals	: Faston 6.3 x 0.8 / solder tab
Reference Standard	: EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
Compliance Marking	: CE, RoHS
Approvals	: cCSAus



B04 PACKAGE

Rated Current	: 1A, 3A, 6A, 10A
Rated Voltage	: 120/250VAC
Mounting	: Panel mounting
Operating Temperature	: 40°C/-25° +85°C
Inlet	: C14 with red illuminated switch & fuse
Output terminals	: Faston 4.8 x 0.8 / solder tab
Reference Standard	: EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
Compliance Marking	: CE, RoHS
Approvals	: cCSAus



B05 PACKAGE

- Rated Current : 1A, 3A, 6A,10A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C14 with red non-illuminated switch and single fuse
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



B06 PACKAGE

- Rated Current : 1A, 3A, 6A, 10A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C14 with black non-illuminated switch& double fuse
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



B07 PACKAGE

- Rated Current : 1A, 3A, 6A,10A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C14 with single fuse
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



B08 PACKAGE

- Rated Current : 1A, 3A, 6A,10A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C14 with double fuse
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



B14 PACKAGE

- Rated Current : 1A, 3A, 6A,10A,15A,20A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C20
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS





B15 PACKAGE

- Rated Current : 1A, 3A, 6A,10A,15A,20A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C20
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



PANEL MOUNTING DOUBLE STAGE



B14 PACKAGE

- Rated Current : 1A, 3A, 6A,10A,15A,20A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C20
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS

B15 PACKAGE

- Rated Current : 1A, 3A, 6A,10A,15A,20A
- Rated Voltage : 120/250VAC
- Mounting : Panel mounting
- Operating Temperature : 40°C/-25° +85°C
- Inlet : C20
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



CABLE MOUNT



D01 PACKAGE

- Rated Current : 5A, 6A, 10A, 15A
- Rated Voltage : 120/250VAC
- Mounting : Cable Mounting
- Operating Temperature : 40°C/-25° +85°C
- Input terminals : Open end, Indian plug, IEC connector
- Output terminals : Open end, IEC connector
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus





CHASSIS FILTER

B09 PACKAGE

- Rated Current : 16A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Faston 6.3 x 0.8 / solder tab
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



DIN-RAIL MOUNTING




E03 PACKAGE


- Rated Current : 1A, 3A, 6A,10A
- Rated Voltage : 120/250VAC
- Mounting : Din-Rail mounting
- Input terminals : Wire leads
- Output terminals : Wire leads
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS

E06 PACKAGE

- Rated Current : 1A, 3A, 6A,10A
- Rated Voltage : 120/250VAC
- Mounting : Din-Rail mounting
- Input terminals : Faston 6.3 x 0.8 / solder tab
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS



DIN RAIL MOUNTING-3 PHASE 4 WIRE FILTER



E07 PACKAGE

- Rated Current : 3A, 6A,10A,15A, 20A, 30A, 40A
- Rated Voltage : 250VAC (Phase-Neutral) 440VAC (Phase-Phase)
- Mounting : Din-Rail mounting
- Input terminals : Screw terminal/ Busbar terminal/ Touch Safe terminal/Wire terminal
- Output terminals : Screw terminal/ Busbar terminal/ Touch Safe terminal/Wire terminal
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS



C01 PACKAGE

CHASSIS MOUNTING SINGLE PHASE SINGLE STAGE FILTER

- Rated Current : 1A, 3A, 6A, 10A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Faston 6.3 x 0.8 / solder tab
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C02 PACKAGE

- Rated Current : 1A, 3A, 6A, 10A, 15A, 20A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Faston 6.3 x 0.8 / solder tab
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C03 PACKAGE

- Rated Current : 1A, 3A, 6A, 10A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Faston 4.8 x 0.8 / solder tab
- Output terminals : Faston 4.8 x 0.8 / solder tab
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C09 PACKAGE

- Rated Current : 20A, 30A, 40A, 50A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Busbar terminal
- Output terminals : Busbar terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C09 PACKAGE

- Rated Current : 20A, 30A, 40A, 50A 60A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus





C02 PACKAGE


CHASSIS MOUNTING SINGLE PHASE DOUBLE STAGE FILTER

- Rated Current : 3A, 6A, 10A, 15A, 20A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Faston 6.3 x 0.8 / solder tab
- Output terminals : Faston 6.3 x 0.8 / solder tab
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus




C09 PACKAGE

- Rated Current : 20A, 30A, 40A, 50A 60A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C10 PACKAGE

- Rated Current : 50A, 60A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus




C11 PACKAGE

- Rated Current : 80A, 100A, 120A, 150A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C12 PACKAGE

- Rated Current : 180A, 200A, 250A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus





CHASSIS MOUNTING 3 PHASE 3 WIRE FILTER (WITHOUT NEUTRAL)

C35 PACKAGE

- Rated Current : 3A, 6A, 10A, 15A, 20A, 30A, 40A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005
CSA Std. C22.2 No. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C35 PACKAGE


- Rated Current : 3A, 6A, 10A, 15A, 20A, 30A, 40A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Touch Safe terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 &
EN60939-2:2005, CSA Std. C22.2
No. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



CHASSIS MOUNTING 3 PHASE 3 WIRE FILTER


C37 PACKAGE

- Rated Current : 50A, 60A, 80A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Screw terminal
- Output terminals : Screw terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2
NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C37 PACKAGE

- Rated Current : 50A, 60A, 80A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Wire terminal
- Output terminals : Wire terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 &
EN60939-2:2005, CSA C22.2
NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus






C39 PACKAGE

- Rated Current : 100A, 120A, 150A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Screw terminal/ Busbar terminal/
Touch Safe terminal/ Wire terminal
- Output terminals : Screw terminal/ Busbar terminal/
Touch Safe terminal/ Wire terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2
NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus




C41 PACKAGE

- Rated Current : 180A, 200A, 250A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Screw terminal/ Busbar terminal/Touch Safe
terminal/Wire terminal
- Output terminals : Screw terminal/ Busbar terminal/Touch Safe
terminal/Wire terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2
NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus




C43 PACKAGE

- Rated Current : 300A, 350A, 400A, 450A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Busbar terminal
- Output terminals : Busbar terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 &
EN60939-2:2005, CSA C22.2
NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



C44 PACKAGE

- Rated Current : 500A, 550A, 600A, 650A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Busbar terminal
- Output terminals : Busbar terminal
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 &
EN60939-2:2005, CSA C22.2
NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus






C57 PACKAGE

Rated Current : 700A, 800A, 1000A
 Rated Voltage : 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)


Compliance Marking : CE, RoHS
 Approvals : cCSAus



C47 PACKAGE

Rated Current : 1200A, 1400A, 1600A
 Neutral : Without neutral
 Rated Voltage : 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)

Compliance Marking : CE, RoHS
 Approvals : cCSAus



C71 PACKAGE CHASSIS MOUNTING 3 PHASE 4 WIRE FILTER (WITH NEUTRAL)

Rated Current : 3A, 6A, 10A, 15A, 20A, 30A, 40A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Screw terminal
 Output terminals : Screw terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)

Compliance Marking : CE, RoHS
 Approvals : cCSAus



C71 PACKAGE

Rated Current : 3A, 6A, 10A, 15A, 20A, 30A, 40A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)


Compliance Marking : CE, RoHS
 Approvals : cCSAus



C74 PACKAGE

Rated Current : 50A, 60A, 80A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Screw terminal
 Output terminals : Screw terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)

Compliance Marking : CE, RoHS
 Approvals : cCSAus






C74 PACKAGE

Rated Current : 50A, 60A, 80A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
 Compliance Marking : CE, RoHS
 Approvals : cCSAus




C76 PACKAGE



Rated Current : 100A, 120A, 150A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Screw terminal/ Busbar terminal/Touch Safe terminal/Wire terminal
 Output terminals : Screw terminal/ Busbar terminal/Touch Safe terminal/Wire terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
 Compliance Marking : CE, RoHS
 Approvals : cCSAus

Rated Current : 180A, 200A, 250A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Screw terminal/ Busbar terminal/Touch Safe terminal/Wire terminal
 Output terminals : Screw terminal/ Busbar terminal/Touch Safe terminal/Wire terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
 Compliance Marking : CE, RoHS
 Approvals : cCSAus

C78 PACKAGE




C83 PACKAGE

Rated Current : 300A, 350A, 400A, 450A, 500A, 550A, 600A, 650A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
 Compliance Marking : CE, RoHS
 Approvals : cCSAus



C84 PACKAGE

Rated Current : 700A, 800A, 1000A
 Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
 Compliance Marking : CE, RoHS
 Approvals : cCSAus







A01 PACKAGE

PCB MOUNTING SINGLE PHASE FILTER

- Rated Current : 1A, 3A, 6A, 10A
- Rated Voltage : 120/250VAC
- Mounting : PCB Mounting
- Input terminals : Solder lug
- Output terminals : Solder lug
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



A02 PACKAGE

- Rated Current : 1A, 3A, 6A
- Rated Voltage : 120/250VAC
- Mounting : PCB Mounting
- Input terminals : Solder lug
- Output terminals : Solder lug
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus

A03 PACKAGE

- Rated Current : 1A, 3A, 6A, 10A
- Rated Voltage : 120/250VAC
- Mounting : PCB Mounting
- Input terminals : Solder lug
- Output terminals : Solder lug
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus



PCB MOUNTING SINGLE PHASE FILTER

A04 PACKAGE




- Rated Current : 2A, 6A
- Rated Voltage : 120/250VAC
- Mounting : PCB Mounting
- Input terminals : Solder lug
- Output terminals : Solder lug
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (7th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus

A04 PACKAGE

PCB MOUNTING 3 PHASE 3 WIRE FILTER (WITHOUT NEUTRAL)

- Rated Current : 1A, 2A, 3A, 6A, 10A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : PCB Mounting
- Input terminals : Solder lug
- Output terminals : Solder lug
- Operating Temperature : 40°C/-25° +85°C
- Reference Standard : EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (5th Edition)
- Compliance Marking : CE, RoHS
- Approvals : cCSAus





EMI RFI FILTERS OUTPUT FILTER CUSTOMIZE FILTER

PCB MOUNTING 3 PHASE 3 WIRE FILTER (WITHOUT NEUTRAL)

A04 PACKAGE

Rated Current	: 1A, 2A, 3A, 6A, 10A
Rated Voltage	: 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
Mounting	: PCB Mounting
Input terminals	: Solder lug
Output terminals	: Solder lug
Operating Temperature	: 40°C/-25° +85°C
Reference Standard	: EN60939-3:2015 & EN60939-2:2005, CSA C22.2 NO. 8-13, UL 1283 (5th Edition)
Compliance Marking	: CE, RoHS
Approvals	: cCSAus



OUTPUT FILTER

CHASSIS MOUNTING 3 PHASE 3 WIRE FILTER



C91 PACKAGE

Rated Current	: 12A
Rated Voltage	: 440VAC (Phase-Phase)
Mounting	: Chassis Mounting
Input terminals	: Touch safe terminal
Output terminals	: Touch safe terminal
Operating Temperature	: 40°C/-25° +85°C
Compliance Marking	: CE, RoHS




CUSTOMISED FILTER

SINGLE PHASE PANEL MOUNTING FILTER

B10 Package

Rated Current	: 3A
Rated Voltage	: 120/250VAC
Mounting	: Panel mounting
Operating Temperature	: 40°C/-25° +85°C
Input terminals	: Circular MIL connector
Output terminals	: Faston 6.3 x 0.8 / solder tab






C02 PACKAGE

CHASSIS MOUNTING SINGLE PHASE FILTER

Rated Current : 1A, 3A, 6A,10A,15A, 20A
 Rated Voltage : 120/250VAC
 Mounting : Chassis Mounting
 Operating Temperature : 40°C/-25° +85°C
 Input terminals : Wire lead terminal
 Output terminals : Wire lead terminal
 Compliance Marking : CE, RoHS

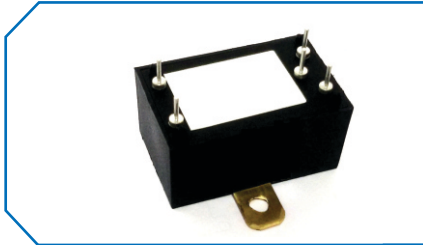


A03 PACKAGE

Rated Current : 1A, 3A, 6A, 10A
 Rated Voltage : 120/250VAC
 Mounting : Chassis Mounting
 Input terminals : Solder lug
 Output terminals : Solder lug
 Operating Temperature : 40°C/-25° +85°C
 Compliance Marking : CE, RoHS

C06 PACKAGE

Rated Current : 1A, 3A, 6A,10A,15A, 20A
 Rated Voltage : 120/250VAC
 Mounting : Chassis Mounting
 Input terminals : Wire terminal
 Output terminals : Wire terminal
 Operating Temperature : 40°C/-25° +85°C
 Compliance Marking : CE, RoHS

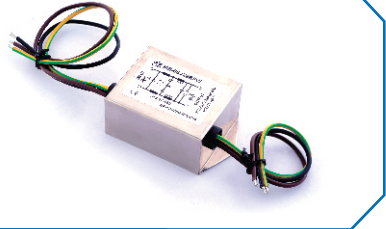


C08 PACKAGE

Rated Current : 10A, 20A, 30A,40A
 Rated Voltage : 120/250VAC
 Mounting : Chassis Mounting
 Input terminals : Busbar terminal
 Output terminals : Busbar terminal
 Operating Temperature : 40°C/-25° +85°C
 Compliance Marking : CE, RoHS

C14 PACKAGE


Rated Current : 3A
 Rated Voltage : 120/250VAC
 Mounting : Chassis Mounting
 Input terminals : Wire lead terminal
 Output terminals : Wire lead terminal
 Operating Temperature : 40°C/-25° +85°C
 Compliance Marking : CE, RoHS

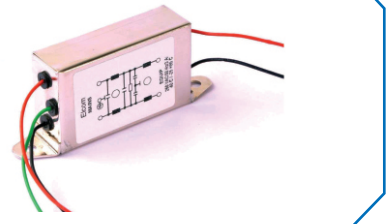




C19 PACKAGE

- Rated Current : 20A
- Rated Voltage : 120/250VAC
- Mounting : Chassis Mounting
- Input terminals : Screw terminal/ Busbar terminal
- Output terminals : Screw terminal/ Busbar terminal
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS



CHASSIS MOUNTING 3 PHASE 3 WIRE FILTER (WITHOUT NEUTRAL)





C48 PACKAGE

- Rated Current : 25A, 40A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Touch Safe terminal
- Output terminals : Touch Safe terminal
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS

C49 PACKAGE

- Rated Current : 5A, 7A
- Rated Voltage : 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Touch Safe terminal
- Output terminals : Wire lead terminal
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS



C51 PACKAGE

- Rated Current : 140A
- Rated Voltage : 480VAC
- Mounting : Chassis Mounting
- Input terminals : Touch Safe terminal
- Output terminals : Wire lead terminal
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS

CHASSIS MOUNTING 3 PHASE 4 WIRE FILTER (WITH NEUTRAL)

C72 PACKAGE

- Rated Current : 20A, 30A, 40A
- Rated Voltage : 250 VAC (Phase-Neutral) 440VAC (Phase-Phase)
- Mounting : Chassis Mounting
- Input terminals : Touch safe terminal
- Output terminals : Touch safe terminal
- Operating Temperature : 40°C/-25° +85°C
- Compliance Marking : CE, RoHS

