


平头菊花

Flat Head Round Body Plain

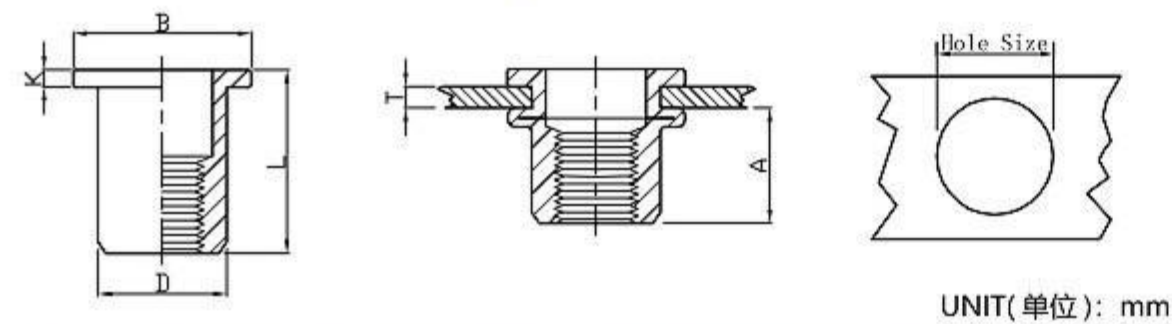


螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-RB-0315 FH-RB-0325	0.5-1.5 1.5-2.5	4.7	5.0	4.9	7.2	0.8	8.5 9.5
M4	FH-RB-0420 FH-RB-0435	0.5-2.0 2.0-3.5	6.0	6.0	5.9	8.5	0.8	10.5 12.0
M5	FH-RB-0525 FH-RB-0550	0.5-2.5 2.5-5.0	7.5 8.5	7.0	6.9	10.0	1.0	13.0 17.0
M6	FH-RB-0630 FH-RB-0655	0.5-3.0 3.0-5.5	9.2	9.0	8.9	12.3	1.3	15.5 18.0
M8	FH-RB-0835 FH-RB-0860	0.5-3.5 3.5-6.0	11.5	11.0	10.9	15.0	1.5	18.5 21.0
M10	FH-RB-1025	0.5-2.5	11.5	13.0	12.9	16.3	1.5	17.0
M10	FH-RB-1040 FH-RB-1060	2.5-4.0 4.0-6.0	12.5	13.0	12.9	17.0	1.6	21.0 24.0
M10	FH-RB-1035(12H)	1.0-3.5	11.0	12.0	11.9	16.0	1.6	19.0
M12	FH-RB-1240 FH-RB-1265	1.0-4.0 4.0-6.5	13.5	15.0	14.9	18.0	1.7	22.0 25.0
M12	FH-RB-1240(16H)	1.0-4.0	16.0	16.0	15.9	22.0	2.0	25.0
M16	FH-RB-16	2.5-5.0	20.0	21.0	20.9	26.0	2.5	33.0

※ 可以按客人要求生产 M14,M16 铆螺母。M14,M16 Size is available.

平头菊花盲孔


Flat Head Round Body Plain Closed End

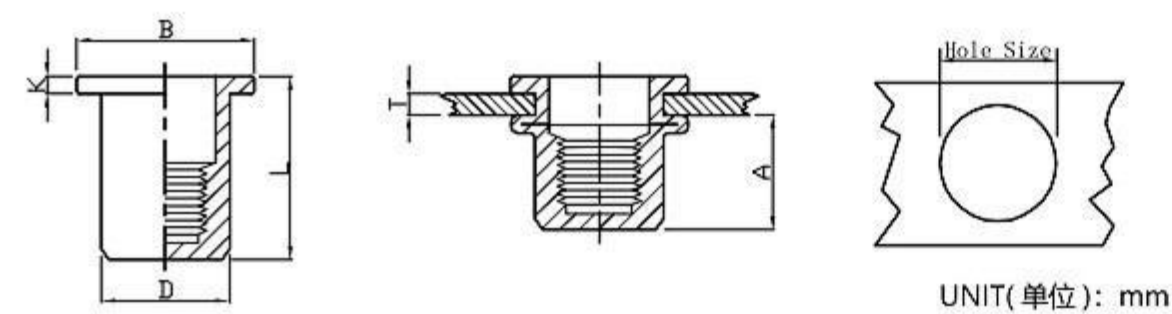

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-RBC-0315	0.5-1.5	10.0	5.0	4.9	7.2	0.8	13.3
M4	FH-RBC-0420 FH-RBC-0440	0.5-2.0 2.0-4.0	11.3	6.0	5.9	9.0	0.8	16.0 18.0
M5	FH-RBC-0525 FH-RBC-0550	0.5-2.5 2.5-5.0	11.5	7.0	6.9	10.0	1.0	17.0 19.0
M6	FH-RBC-0630 FH-RBC-0650	0.5-3.0 3.0-5.5	12.7	9.0	8.9	12.3	1.3	19.2 21.0
M8	FH-RBC-0830 FH-RBC-0855	0.5-3.0 3.5-5.5	14.8	11.0	10.9	15.0	1.5	21.5 24.0
M10	FH-RBC-1040	1.0-4.0	19.2	13.0	12.9	17.0	1.6	27.0

小沉头菊花


Reduce Head Round Body Plain

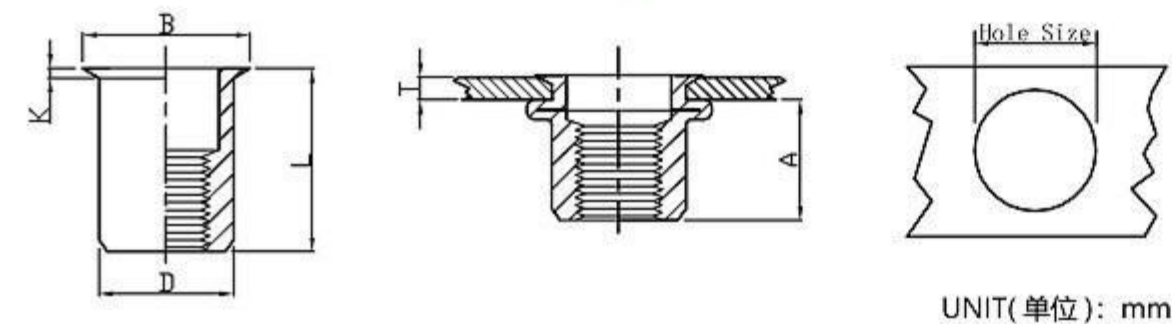

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	RH-RB-0315	0.5-1.5	6.2	5.0	4.9	6.0	0.5	9.0
M4	RH-RB-0420 RH-RB-0440	0.5-2.0 2.0-4.0	6.5	6.0	5.9	7.0	0.5	10.5 13.0
M5	RH-RB-0520 RH-RB-0540	0.5-2.0 2.0-4.0	7.0	7.0	6.9	8.0	0.5	11.5 13.0
M6	RH-RB-0625 FH-RB-0650	0.5-2.5 2.5-5.0	8.5	9.0	8.9	10.5 10.0	0.6 0.6	14.0 17.0
M8	RH-RB-0830 FH-RB-0850	0.5-3.0 3.0-5.0	10.0	11.0	10.9	12.0	0.65	16.5 18.5
M10	RH-RB-1030 RH-RB-1055	0.5-3.0 3.0-5.5	13.0	13.0	12.9	14.1	0.7	17.7 21.0
M10	RH-RB-1030(12H)	0.5-3.0	12.5	12.0	11.9	13.0	0.7	18.0


小沉头圆柱 (盲孔)

Reduce Head Round Body Plain Closed End

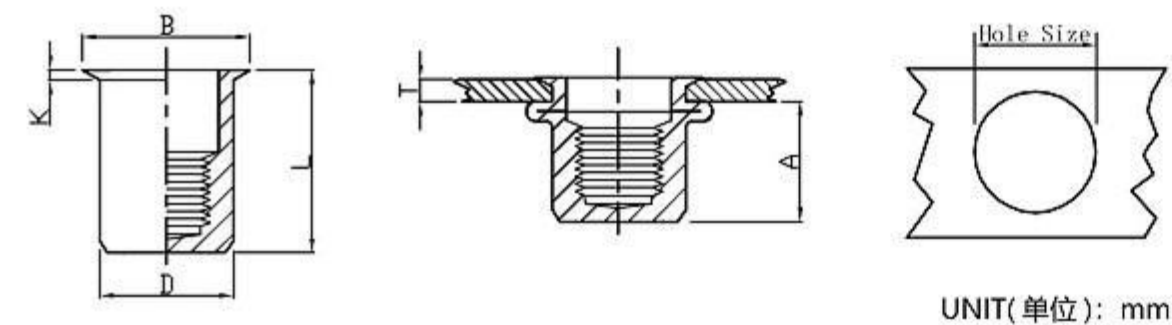

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	RH-RBC-0420 RH-RBC-0435	0.5-2.0 2.0-3.5	11.0	6.0	5.9	7.0	0.5	15.0 16.0
M5	RH-RBC-0520 RH-RBC-0535	0.5-2.0 2.0-3.5	12.5	7.0	6.9	8.0	0.5	16.5 17.5
M6	RH-RBC-0625 RH-RBC-0640	0.5-2.5 2.5-4.0	15.5	9.0	8.9	10.0	0.6	20.5 22.0
M8	RH-RBC-0830 RH-RBC-0845	0.5-3.0 2.5-4.5	17.0	11.0	10.9	12.0	0.65	23.0 24.5
M10	RH-RBC-1030 RH-RBC-1050	1.0-3.0 3.0-5.0	18.2	13.0	12.9	14.1	0.7	24.5 26.0


平头菊花条纹
Flat Head Knurled Body

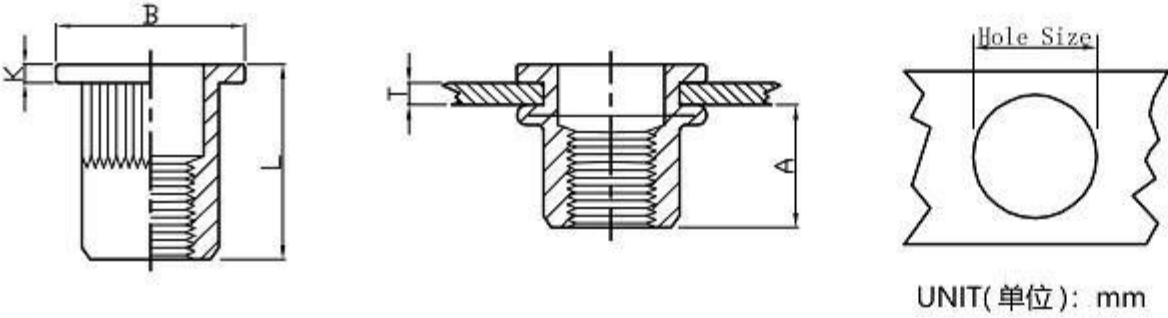

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	FH-KB-0315	0.5-1.5		6.0	5.0	4.9	8.0	0.8	10.0
	FH-KB-0325	2.0-3.5							11.5
M4	FH-KB-0420	0.5-2.0		6.0	6.0	5.9	9.0	0.8	10.5
	FH-KB-0435	2.0-3.5							12.0
M5	FH-KB-0525	0.5-2.5		7.5	7.0	6.9	10.0	1.0	13.0
	FH-KB-0550	2.5-5.0		8.5					16.5
M6	FH-KB-0630	0.5-3.0		9.2	9.0	8.9	12.3(*13.0)	1.3	15.5
	FH-KB-0655	3.0-5.5		10.5					19.5
M8	FH-KB-0835	1.0-3.5		11.5	11.0	10.9	14.5(*16.0)	1.5	18.5
	FH-KB-0860	3.5-6.0							21.0
M10	FH-KB-1040	1.0-4.0		13.5	13.0	12.9	17.0 (*19.0)	1.7	21.5
	FH-KB-1065	4.0-6.5							24.0
M10	FH-KB-1035(12H)	1.0-3.5		11.0	12.0	11.9	16.0	1.6	19.0
	FH-KB-1060(12H)	3.5-5.5							24.0
M12	FH-KB-1240	1.0-4.0		13.5	15.0	14.9	18.0	1.7	22.0
	FH-KB-1265	4.0-6.5		14.0					25.0
M12	FH-KB-1240(16H)	1.0-4.0		15.0	16.0	15.9	22.0	2.0	25.0
	FH-KB-1260(16H)	3.5-6.0		16.0					28.0


※ 部分为可代替尺寸，客户需要请另做说明 Part are different series, if customer need this size, please mark.
※ 这个系列的产品包含带菊花和不带菊花系列 All this part included serration or without serration under the flange.

平头竖条纹（盲孔）
Flat Head Knurled Body Closed End

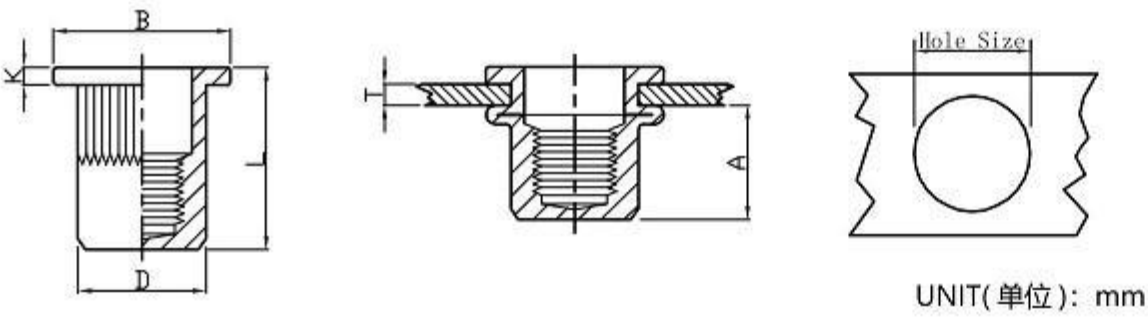


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	FH-KBC-0420	0.5-2.0		11.3	6.0	5.9	9.0	0.8	16.0
	FH-KBC-0440	2.0-4.0							18.0
M5	FH-KBC-0530	0.5-3.0		11.5	7.0	6.9	10.0	1.0	17.0
	FH-KBC-0550	2.5-5.0							19.0
M6	FH-KBC-0630	0.5-3.0		12.7	9.0	8.9	12.3	1.3	19.2
	FH-KBC-0650	3.0-5.0							21.0
M8	FH-KBC-0830	0.5-3.0		14.8	11.0	10.9	15.0	1.5	21.5
	FH-KBC-0855	3.0-5.5							24.0
M10	FH-KBC-1040	1.0-4.0		19.2	13.0	12.9	17.0	1.6	27.0
	FH-KBC-1060	3.5-6.0		22.0					32.5

小沉头竖条纹
Reduce Head Knurled Body

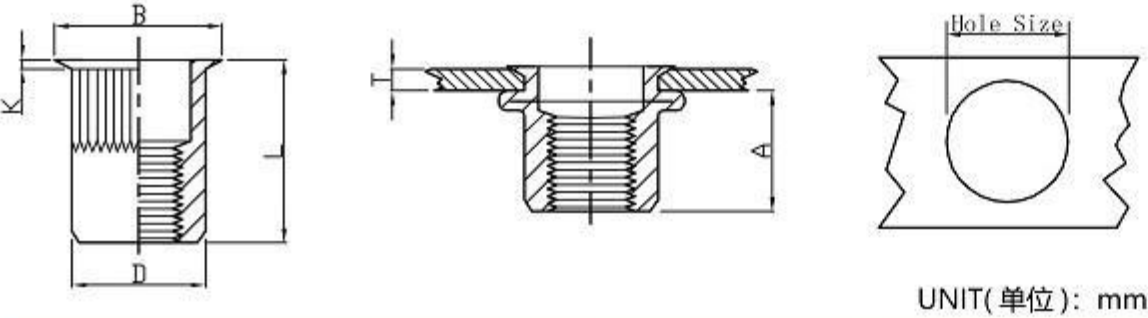

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	RH-KB-0320	0.5-2.0		6.2	5.0	4.9	6.0	0.5	9.0
	RH-KB-0335	1.5-3.0							11.5
M4	RH-KB-0420	0.5-2.0		7.0	6.0	5.9	7.0	0.5	11.2
	RH-KB-0440	2.0-4.0							13.0
M5	RH-RB-0520	0.5-2.0		7.0	7.0	6.9	8.0	0.5	11.5
	RH-KB-0540	2.0-4.0							13.0
M6	RH-KB-0625	0.5-2.5		8.5	9.0	8.9	10.0	0.6	14.0
	RH-KB-0650	2.5-5.0							16.0
M8	RH-KB-0830	0.5-3.0		10.0	11.0	10.9	12.0	0.65	16.5
	RH-KB-0850	3.0-5.0							18.5
M10	RH-KB-1035	1.0-3.5		12.5	13.0	12.9	14.0	0.7	19.5
	RH-KB-1060	3.5-6.0							22.0
M10	RH-KB-1035(12H)	1.0-3.5		12.5	12.0	11.9	13.0	0.7	19.5
	RH-KB-1060(12H)	3.5-5.5							22.0
M12	RH-KB-1240	1.0-4.0		16.2	16.0	15.9	17.6	0.75 0.8	24.2
	RH-KB-1260	4.0-6.5							27.5
M12	RH-KB-1235	0.5-3.5		15.2	15.0	14.9	16.5	0.8	22.5


小沉头竖条纹（盲孔）
Reduce Head Knurled Body Closed End

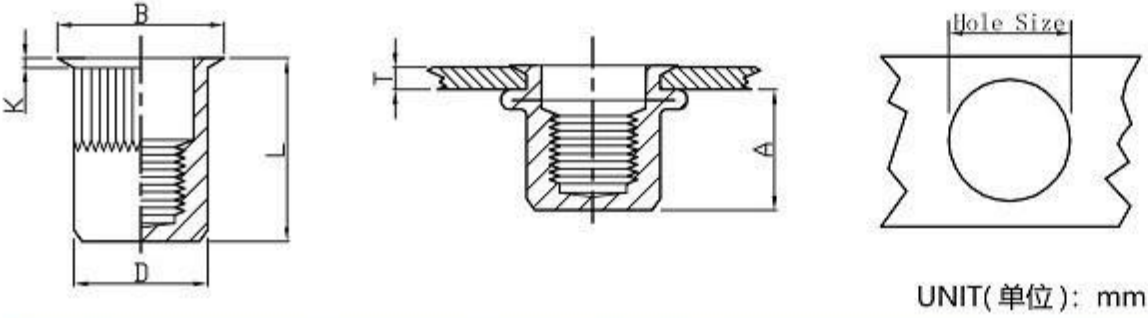

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	RH-KBC-0420	0.5-2.0		11.0	6.0	5.9	7.0	0.5	15.0
	RH-KBC-0435	2.0-3.5							16.5
M5	RH-KBC-0520	0.5-2.0		12.5	7.0	6.9	8.0	0.5	16.5
	RH-KBC-0535	2.0-3.5							18.0
M6	RH-KBC-0630	0.5-3.0		15.5	9.0	8.9	10.0	0.6	20.5
	RH-KBC-0645	3.0-4.5							22.0
M8	RH-KBC-0830	0.5-3.0		17.0	11.0	10.9	12.0	0.65	23.0
	RH-KBC-0845	3.0-4.5							24.5
M10	RH-KBC-1030	1.0-3.0		18.2	13.0	12.9	14.0	0.7	24.5
	RH-KBC-1050	3.0-5.0							26.0
M12	RH-KBC-1240	1.0-4.0		20.0	16.0	15.9	17.6	0.8	29.0
	RH-RBC-1260	3.0-6.0							32.0

沉头光身


Countersunk Head Round Body Plain

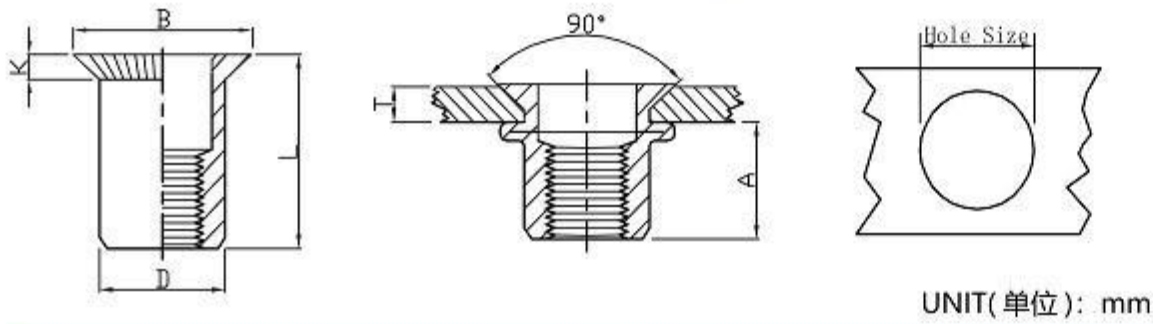

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	CH-RB-0335	1.6	3.5	4.5	5.0	4.9	7.8	1.5	8.5
M4	CH-RB-0430	1.5	3.0	6.5	6.0	5.9	9.0	1.5	12.0
M5	CH-RB-0535	1.5	3.5	7.5	7.0	6.9	10.0	1.5	13.0
M6	CH-RB-0640	1.5	4.0	9.0	9.0	8.9	12.0	1.5	15.5
M8	CH-RB-0845	2.0	4.5	11.0	11.0	10.9	14.0	1.5	18.5
M10	CH-RB-1050	2.0	5.0	13.0	13.0	12.9	16.0	1.5	21.0
M12	CH-RB-1245	1.6	4.5	17.5	16.0	15.9	19.0	1.9	26.0

沉头条纹


Countersunk Head Knurled Body

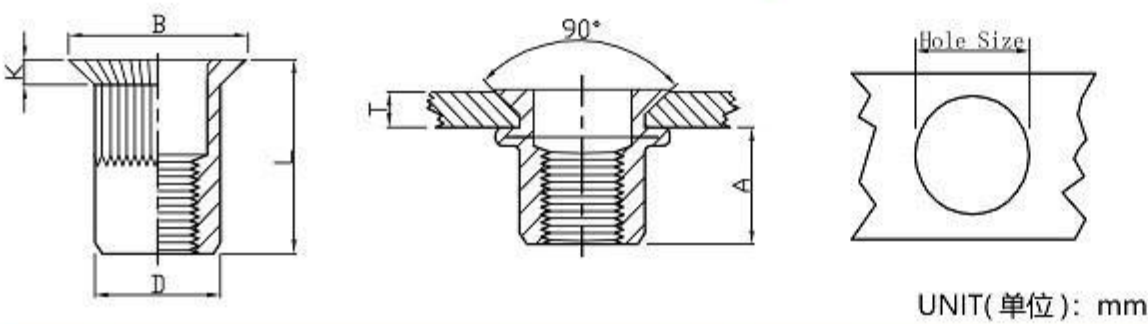

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	CH-KB-0325 CH-KB-0340	1.5-2.5 2.5-4.0		4.5	5.0	4.9	7.5	1.5	8.5 10.5
M4	CH-KB-0430 CH-KB-0450	1.5-3.0 3.5-5.0		6.5	6.0	5.9	9.0	1.5	12.0 13.0
M5	CH-RB-0535 CH-KB-0550	1.5-3.5 3.0-5.0		7.5	7.0	6.9	10.0	1.5	13.0 15.0
M6	CH-KB-0640 CH-KB-0660	1.5-4.0 4.0-6.0		9.0	9.0	8.9	12.0	1.5	15.5 17.0
M8	CH-KB-0845 CH-KB-0860	2.0-4.5 4.5-6.0		11.0	11.0	10.9	14.0	1.5	18.5 19.0
M10	CH-KB-1050 CH-KB-1065	2.0-5.0 3.5-6.5		13.0	13.0	12.9	16.0	1.5	21.0 24.0
M12	CH-KB-1250(16H) CH-KB-1270(16H)	2.0-5.0 5.0-7.0		16.5	16.0	15.9	19.0	1.9	24.0 24.0

沉头光身（盲孔）


Countersunk Head Round Body Plain Closed End

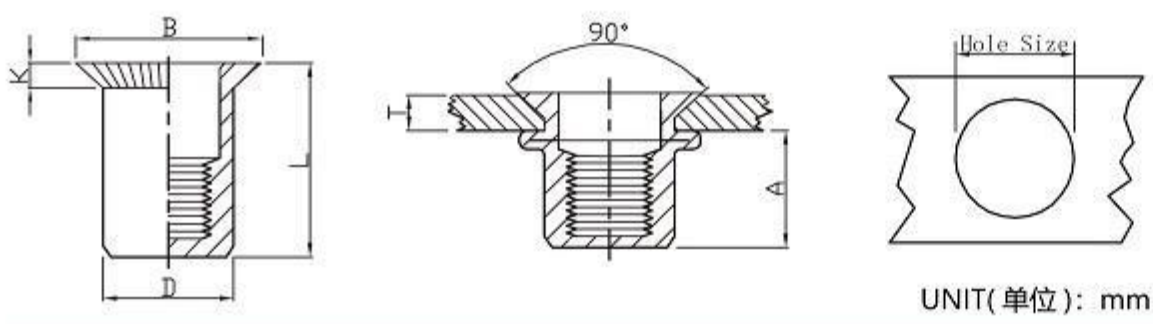

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	CH-RBC-0430	1.5	3.0	12.3	6.0	5.9	9.0	1.5	17.5
M5	CH-RBC-0535	1.5	3.5	14.0	7.0	6.9	10.0	1.5	19.5
M6	CH-RBC-0640	1.5	4.0	17.5	9.0	8.9	12.0	1.5	23.5
M8	CH-RBC-0840	1.5	4.0	20.0	11.0	10.9	14.0	1.5	26.5
M10	CH-RBC-1045	1.5	5.0	21.5	13.0	12.9	16.0	1.5	30.0


沉头条纹（盲孔）

Countersunk Head Knurled Body Closed End

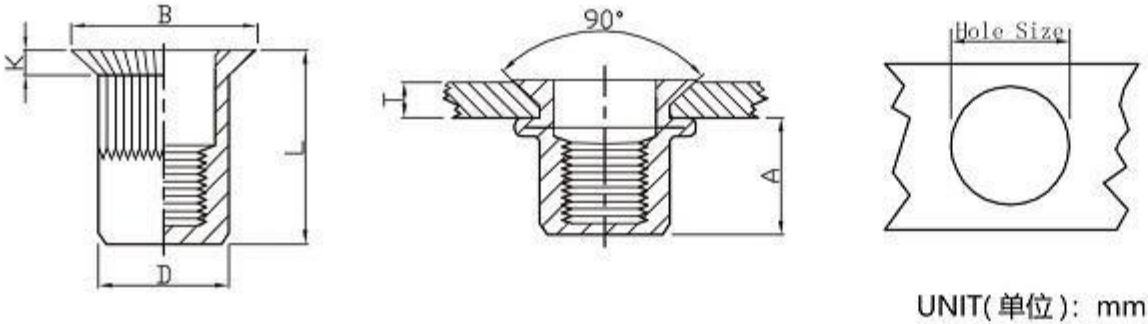


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	CH-KBC-0325 CH-KBC-0340	1.5-2.5 2.5-4.0		10.3	5.0	4.9	7.5	1.5	15.5 17.5
M4	CH-KBC-0430 CH-KBC-0450	1.5-3.0 3.0-5.0		12.3	6.0	5.9	9.0	1.5	17.5 19.5
M5	CH-KBC-0535 CH-KBC-0550	1.5-3.5 3.5-5.0		14.0	7.0	6.9	10.0	1.5	19.5 23.5
M6	CH-KBC-0640 CH-KBC-0660	1.5-4.0 4.0-6.0		17.5	9.0	8.9	12.0	1.5	23.5 25.5
M8	CH-KBC-0845 CH-KBC-0860	1.5-4.5 4.5-6.0		20.0	11.0	10.9	14.0	1.5	26.5 29.5
M10	CH-KBC-1050 CH-KBC-1065	1.5-5.0 4.5-6.5		21.5	13.0	12.9	16.0	1.5	30.0 32.5
M12	CH-KBC-1255 CH-KBC-1270	1.5-5.5 5.5-7.0		22.5	16.0	15.9	19.0	1.5	33.0 35.0

平头半六角
Flat Head Semi-Hex Body

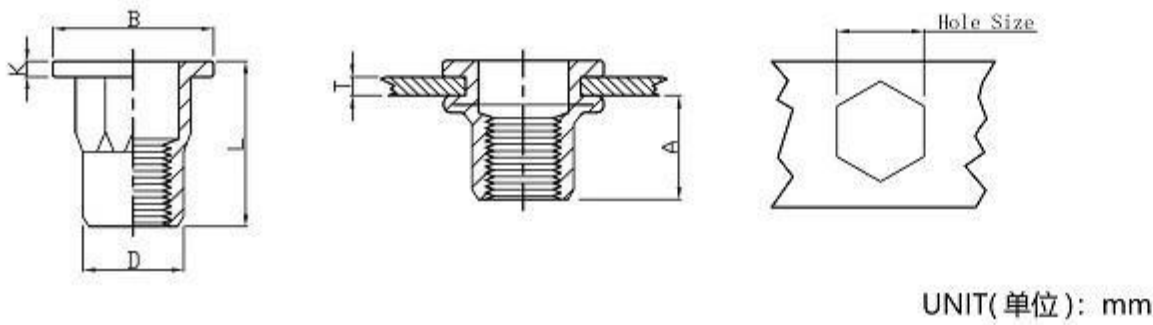


螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-SHB-0325	0.5-1.8	5.5	5.0	4.9	8.0	0.75	9.0
M4	FH-SHB-0420	0.5-2.0	7.0	6.0	5.9	9.0	0.8	11.0
	FH-SHB-0440	2.0-4.0						13.0
M5	FH-IHB-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	12.0
	FH-IHB-0540	2.5-4.0						14.0
M6	FH-IHB-0630	0.5-3.0	9.2	9.0	8.9	12.7(*13.0)	1.35	15.5
	FH-IHB-0650	3.0-5.0						19.5
M8	FH-IHB-0835	1.0-3.5	11.2	11.0	10.9	16.0	1.5	18.0
	FH-IHB-0855	3.5-5.5						21.0
M10	FH-IHB-1035	1.0-3.5	12.5	13.0	12.9	18.0(*19.0)	1.7	21.0
	FH-IHB-1060	3.5-6.0	12.8					21.0
M10	FH-IHB-1035(12H)	1.0-3.5	11.0	12.0	11.9	17.0	1.6	19.0
M12	FH-IHB-1250(16H)	2.0-5.0	16.5	16.0	15.9	23.0	2.0	27.5

电梯螺母
Elevator Nut

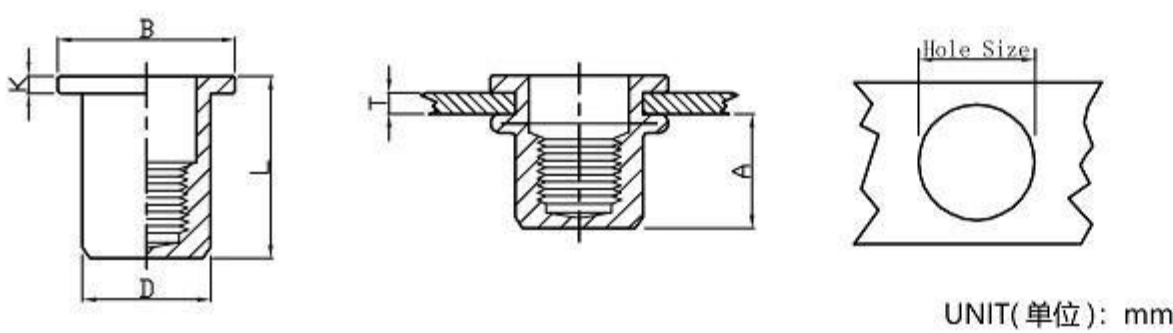



螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M6	FHRB-TT-0630	1.0-3.0	10	9.0	8.9	12.0	5.0	18.0
M8	FHRB-TT-0835	1.0-3.5	11.5	11.0	10.9	16.0	6.0	20.0
M10	FHRB-TT-1040	1.0-4.0	12.5	14.3	14.2	18.0	6.0	22.5

平头内外半六角
Flat Head Inner-Hex Body

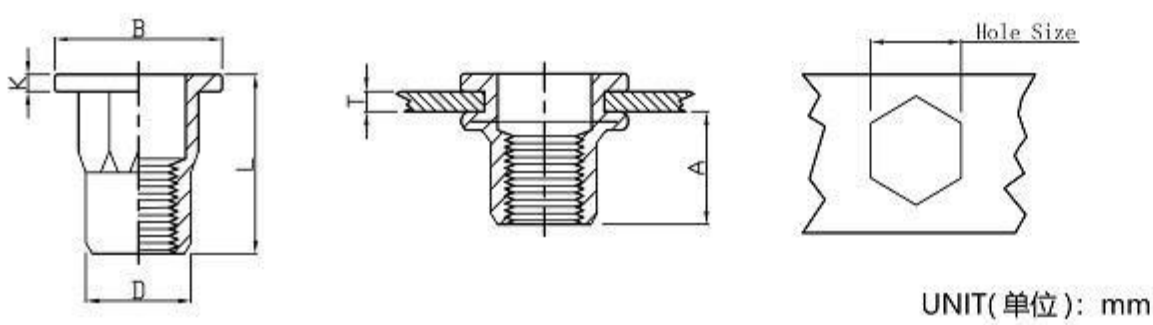


螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-IHB-0325	0.5-1.8	5.5	5.0	4.9	8.0	0.75	9.0
M4	FH-IHB-0420	0.5-2.0	7.0	6.0	5.9	9.0	0.8	11.0
	FH-IHB-0440	2.0-4.0						13.0
M5	FH-IHB-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	12.0
	FH-IHB-0540	2.5-4.0						14.0
M6	FH-IHB-0630	0.5-3.0	9.2	9.0	8.9	12.7(*13.0)	1.35	15.5
	FH-IHB-0650	3.0-5.0						19.5
M8	FH-IHB-0835	1.0-3.5	11.2	11.0	10.9	16.0	1.5	18.0
	FH-IHB-0855	3.5-5.5						21.0
M10	FH-IHB-1035(13H)	1.0-3.5	12.8	13.0	12.9	18.0(*19.0)	1.7	21.0
	FH-IHB-1060(13H)	3.5-6.0						21.0
M12	FH-IHB-1250(16H)	2.0-5.0	16.5	16.0	15.9	23.0	2.0	27.5

平头内外半六角（盲孔）
Flat Head Inner-Hex Body Closed End

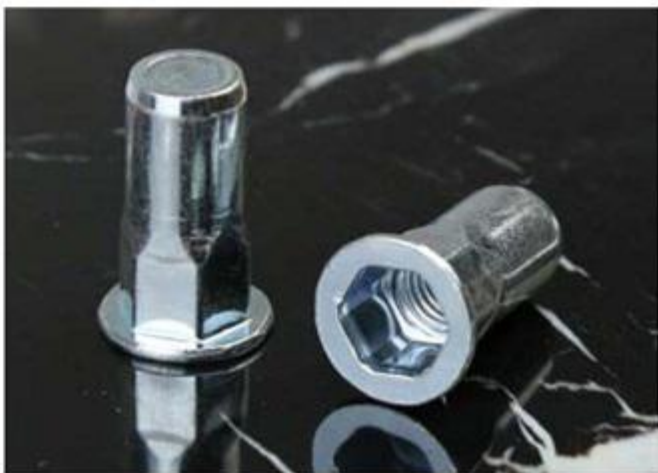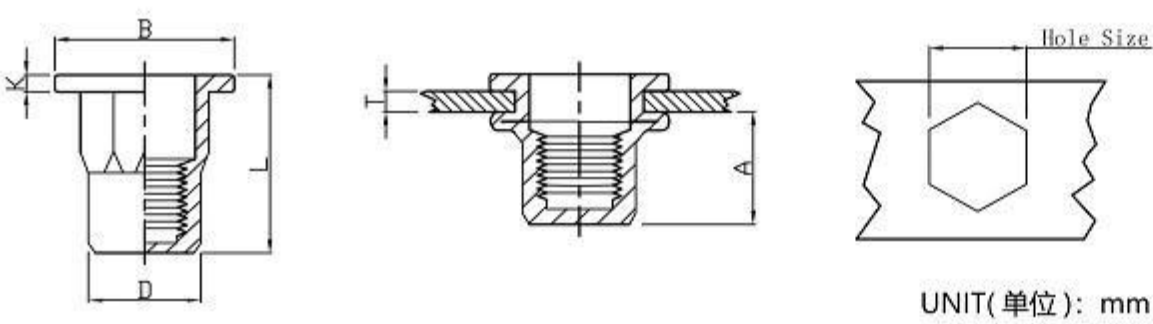

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	FH-IHBC-0420	0.5-2.0	11.5	6.0	5.9	9.0	0.8	16.0
	FH-IHBC-0440	2.0-4.0						17.0
M5	FH-IHBC-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.5
	FH-IHBC-0545	2.5-4.5						19.5
M6	FH-IHBC-0635	0.5-3.0	17.0	9.0	8.9	12.7	1.35	23.0
	FH-IHBC-0655	3.0-5.5						25.0
M8	FH-IHBC-0835	1.0-3.5	18.2	11.0	10.9	16.0	1.5	25.0
	FH-IHBC-0860	3.5-6.0						27.0
M10	FH-IHBC-1040	1.0-4.0	25.0	13.0	12.9	18.0(*19.0)	1.7	33.0
	FH-IHBC-1060	4.0-6.0						35.0
M12	FH-IHBC-1265	4.0-6.5	27.0	16.0	15.9	23.0	2.0	34.0
	FH-IHBC-1285	6.5-8.5						37.0


平头全六角
Flat Head Full Hex Body

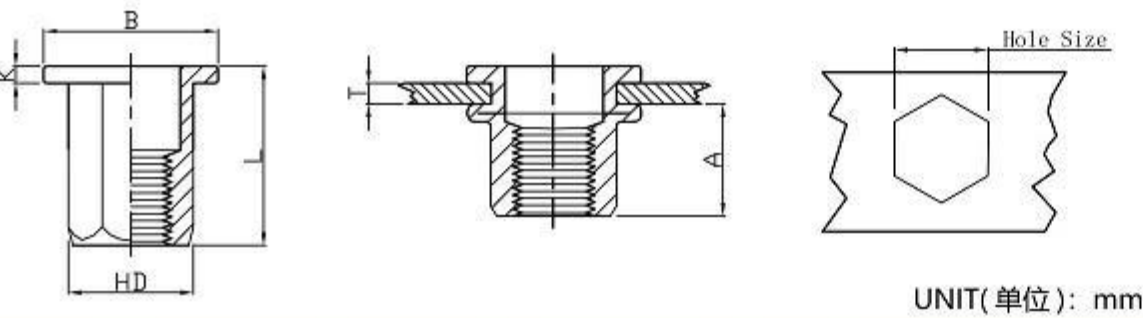

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	FH-FHB-0325	0.5-1.5		5.5	5.0	4.9	7.5	0.8	8.5
M4	FH-FHB-0420	0.5-2.0		6.5	6.0	5.9	9.0	0.8	11.0
	FH-FHB-0440	2.0-4.0							13.0
M5	FH-FHB-0525	0.5-2.5		8.0	7.0	6.9	10.0	1.0	14.0
	FH-FHB-0540	2.5-5.0							16.5
M6	FH-FHB-0630	0.5-3.0		8.5	9.0	8.9	12.7(*13.0)	1.35	15.0(*16.0)
	FH-FHB-0650	3.0-5.5							19.5
M8	FH-FHB-0835	1.0-3.5		10.5	11.0	10.9	16.0	1.5	18.0
	FH-FHB-0855	3.5-5.5							21.0
M10	FH-FHB-1035	1.0-3.5		12.5	13.0	12.9	18.0(*19.0)	1.7	21.0(*23.0)
	FH-FHB-1060	3.5-6.0							24.0
M10	FH-FHB-1035(12H)	1.0-3.5		13.5	12.0	11.9	18.0	1.7	21.0
	FH-FHB-1040(12H)	3.5-6.0							22.5
M12	FH-FHB-1240(15H)	1.0-4.0		14.0	15.0	14.9	20.0	1.7	23.0
M12	FH-FHB-1250(16H)	2.0-5.0		16.5	16.0	15.9	23.0	2.0	27.0
	FH-FHB-1280(16H)	5.0-8.0							30.0


※部分为可代替尺寸，客户需要请另做说明
※Part are different series, if customer need this size, please mark.

平头全六角(盲孔)
Flat Head Full Hex Body Closed End

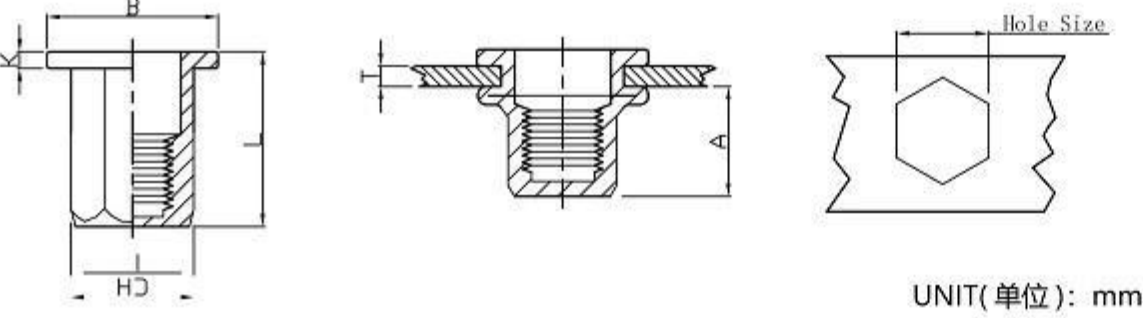


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	FH-FHBC-0420	0.5-2.0		11.0	6.0	5.9	9.0	1.0	15.0
	FH-FHBC-0440	2.0-4.0							17.0
M5	FH-FHBC-0525	0.5-2.5		13.5	7.0	6.9	10.0	1.0	18.0
	FH-FHBC-0540	2.5-5.0							20.0
M6	FH-FHBC-0630	0.5-3.0		17.0	9.0	8.9	12.7	1.5	23.0
	FH-FHBC-0650	3.0-5.5							25.0
M8	FH-FHBC-0835	1.0-3.5		19.0	11.0	10.9	16.0	1.5	26.0
	FH-FHBC-0855	3.5-5.5							29.0
M10	FH-FHBC-1040	1.0-4.0		25.0	13.0	12.9	19.0	2.0	33.0
	FH-FHBC-1060	4.0-6.0							35.0

小沉头全六角
Reduce Hex Head Full-Hex Body

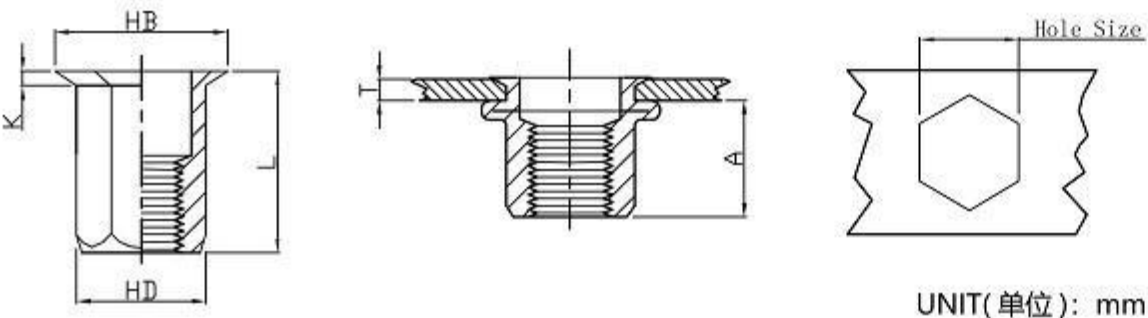


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	RHH-FHB-0325	0.5-1.5		5.0	5.0	4.9	6.0	0.5	8.5
	RHH-FHB-0340	1.5-3.0							10.5
M4	RHH-FHB-0425	0.5-2.5		6.7	6.0	5.9	7.0	0.5	11.0
	RHH-FHB-0450	2.5-5.0							13.5
M5	RHH-FHB-0530	0.5-3.0		9.0	7.0	6.9	8.0	0.5	14.5
	RHH-FHB-0550	3.0-5.0							16.0
M6	RHH-FHB-0635	1.0-3.5		10.0	9.0	8.9	10.0	0.6	16.0
	RHH-FHB-0660	3.5-6.0							18.0
M8	RHH-FHB-0840	1.0-4.0		11.5	11.0	10.9	12.0	0.65	18.0
	RHH-FHB-0860	4.0-6.0							20.0
M10	RHH-FHB-1035	1.0-3.5		12.5	12.0	11.9	13.5	0.75	20.0
	RHH-FHB-1060	3.5-6.0							23.5
M10	RHH-FHB-1035	1.0-3.5		12.5	13.0	12.9	14.5	0.75	19.0
	RHH-FHB-1060	3.5-6.0							23.5
M12	RHH-FHB-1240	1.0-4.0		15.5	16.0	15.9	17.5	1.0	25.0
	RHH-FHB-1260	4.0-7.0							28.0

小沉头全六角(盲孔)
Reduce Hex Head Full-Hex Body Closed End

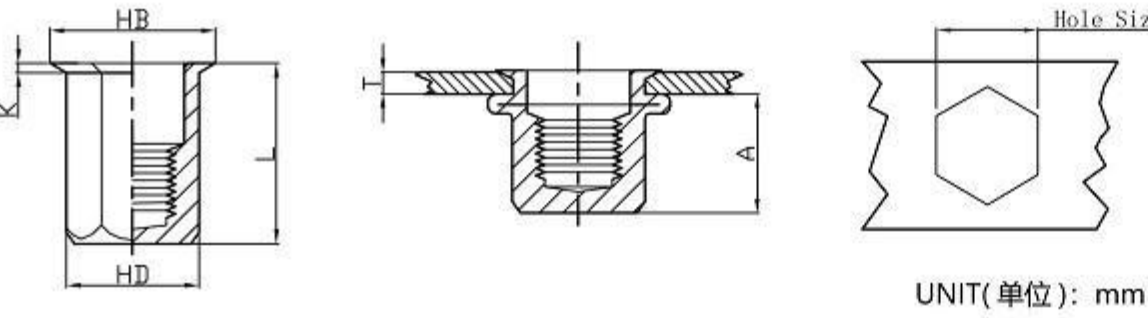


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	RH-FHBC-0425	0.5-2.5		12.3	6.0	5.9	7.0	0.5	16.0
	RH-FHBC-0450	2.5-4.0							18.0
M5	RH-FHBC-0530	0.5-3.0		15.2	7.0	6.9	8.0	0.5	20.0
	RH-FHBC-0550	3.0-5.0							23.0
M6	RH-FHBC-0635	0.5-3.5		14.5	9.0	8.9	10.0	0.6	20.5
	RH-FHBC-0660	3.5-5.5							23.5
M8	RH-FHBC-0840	1.0-4.0		17.0	11.0	10.9	12.0	0.65	23.0
	RH-FHBC-0860	4.0-6.0							25.0
M10	RH-FHBC-1045	1.0-4.5		20.0	13.0	12.9	14.5	0.75	28.5
	RH-FHBC-1060	4.0-6.0							30.5

小沉头内外六角
Reduce Hex Head Inner-Hex Body

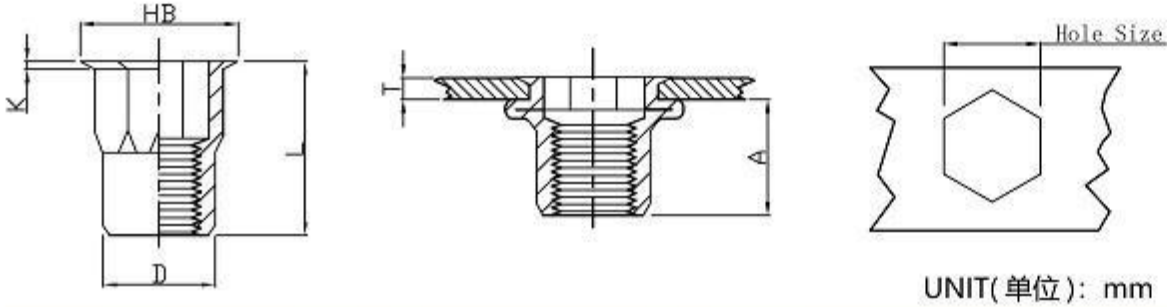


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	RHH-IHB-0325	0.5	1.5	5.5	5.0	4.9	6.0	0.5	8.5
	RHH-IHB-0340	1.5	2.5						
M4	RHH-IHB-0420	0.5	2.0	8.3	6.0	5.9	7.0	0.5	12.0
	RHH-IHB-0440	2.0	4.0						
M5	RHH-IHB-0525	0.5	2.5	8.7	7.0	6.9	8.0	0.5	13.0
	RHH-IHB-0540	2.5	4.5						
M6	RHH-IHB-0635	1.0	3.5	10.5	9.0	8.9	10.0	0.6	16.0
	RHH-IHB-0650	3.5	5.0						
M8	RHH-IHB-0835	1.0	3.5	11.3	11.0	10.9	12.0	0.65	17.5
	RHH-IHB-0850	3.5	6.0						
M10	RHH-IHB-1040	1.0	4.0	12.8	13.0	12.9	14.5	0.75	21.0
	RHH-IHB-1050	4.0	6.0						
M12	RHH-IHB-1240	1.0	4.0	14.8	16.0	15.9	17.5	1.0	25.0
	RHH-IHB-1260	4.0	7.0						

小沉头内外六角(盲孔)
Reduce Hex Head Inner-Hex Body Closed End

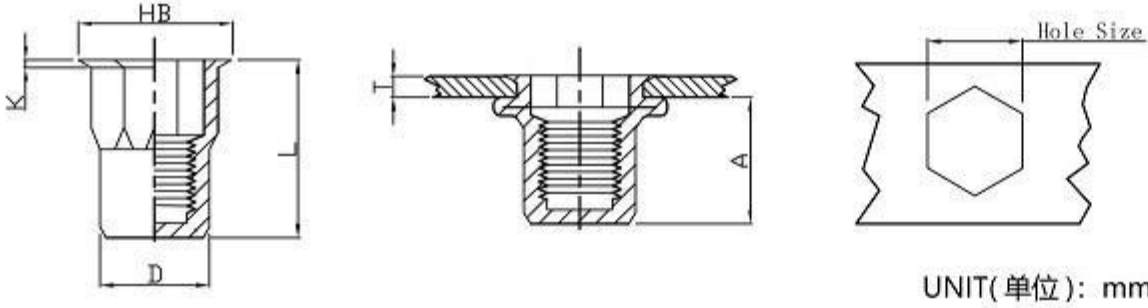


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	RHH-IHBC-0420	0.5	2.0	11.5	6.0	5.9	7.0	0.6	15.5
	RHH-IHBC-0440	2.0	4.0						
M5	RHH-IHBC-0525	0.5	2.5	13.5	7.0	6.9	8.0	0.6	18.0
	RHH-IHBC-0545	2.5	4.5						
M6	RHH-IHBC-0635	1.0	3.5	15.8	9.0	8.9	10.0	0.6	21.5
	RHH-IHBC-0650	3.0	5.0						
M8	RHH-IHBC-0835	1.0	3.5	18.2	11.0	10.9	12.0	0.7	24.0
	RHH-IHBC-0855	3.5	5.5						
M10	RHH-IHBC-1040	1.0	4.0	23.2	13.0	12.9	14.5	0.85	30.5
	RHH-IHBC-1060	4.0	6.0						
M12	RHH-IHBC-1265	4.0	6.5	22.5	16.0	15.9	17.5	1.0	32.5
	RHH-IHBC-1285	6.5	8.5						

小沉头内外六角(英标)
Reduce Hex Head Inner-Hex Body-UK

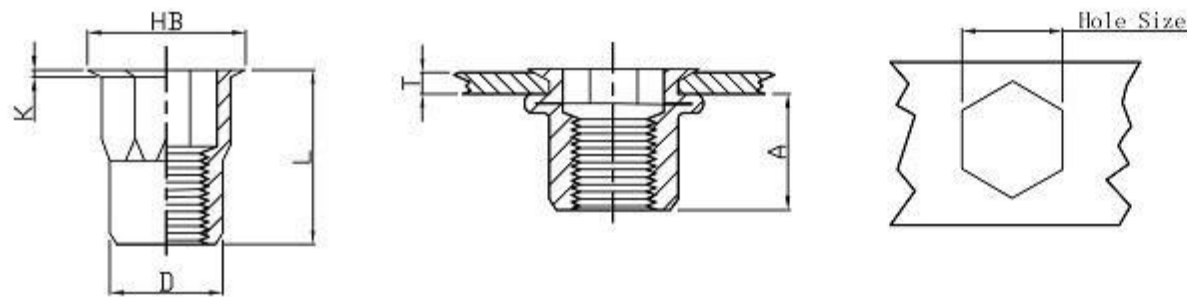


螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D ± 0.05 (* ± 0.08)	B	K	L $+1.0$ -1.0
		Min	Max						
M4	RHH-IHB-UK-0420	0.5	2.0	6.5	6.4	6.25	7.25	0.5	10.5
M5	RHH-IHB-UK-0525	0.5	2.5	7.5	7.2	7.05	8.1	0.5	12.0*
M6	RHH-IHB-UK-0630	1.0	3.0	9.2	9.6	9.45	10.5*	0.6*	15.0*
M8	RHH-IHB-UK-0835	1.0	3.5	10.5	10.6	10.45	11.5*	0.65*	16.5*
M10	RHH-IHB-UK-1040	1.0	4.0	11.3	12.8	12.65	14.0	0.7	21.0

平头内外六角(英标)
Flat Head Inner-Hex Body-UK

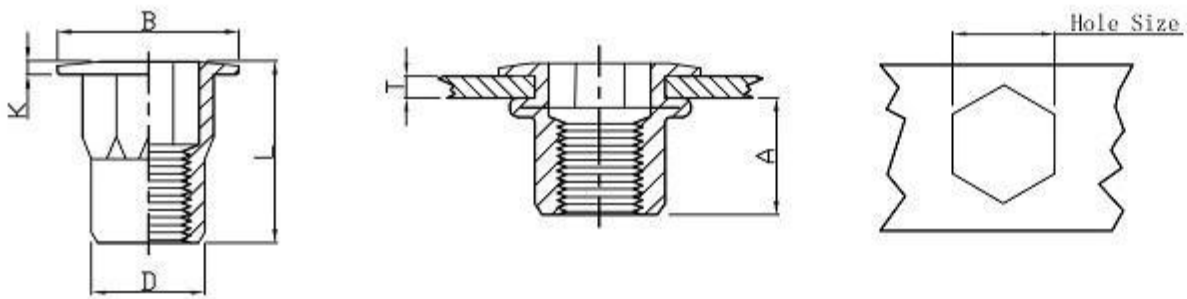

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D ± 0.05 (* ± 0.08)	B	K	L $+1.0$ -1.0
		Min	Max						
M4	FH-IHB-UK-0420	0.5	2.0	6.5	6.4	6.25	9.5	0.6	10.5
M5	FH-IHB-UK-0525	0.5	2.5	7.5	7.2	7.05	10.0	0.8	12.0
M6	FH-IHB-UK-0630	1.0	3.0	9.2	9.6	9.4*	12.95*	1.0*	15.5*
M8	FH-IHB-UK-0835	1.0	3.5	10.5	10.6	10.45*	16.5*	1.15*	18.5*
M10	FH-IHB-UK-1040	1.0	4.0	12.3	12.8	12.65	17.0	1.2	20.5

平头（菊花）竖条纹（美标）
Flat Head Knurled Body-AVK

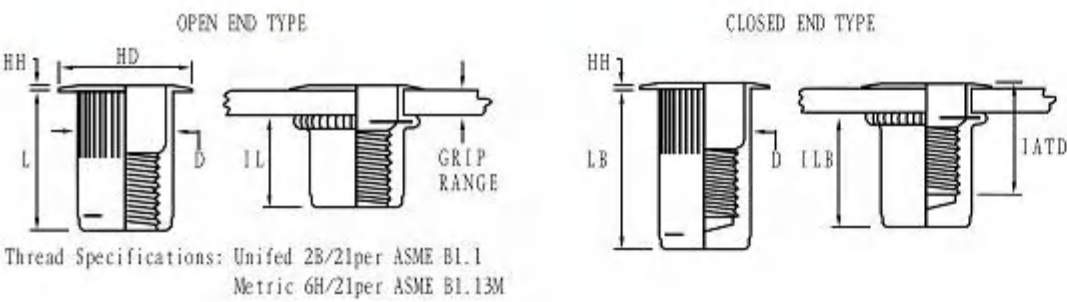


UNIT(单位): INCH

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size $\begin{smallmatrix} +.006 \\ -.000 \end{smallmatrix}$	HD $\begin{smallmatrix} \pm .010 \\ \pm .205^* \end{smallmatrix}$	HH $\pm .003$	L $\pm .015$	D MAX.	IL MAX.	LB $\pm .015$	ILB MAX.	IATD* MAX.
6-32 UNC	632	.020-.080	80	17/64(.2656)	.390	.030	.420	.265	.305	.740	.640	.610
6-32UNC	632	.080-.130	130	17/64(.2656)	.390	.030	.470	.265	.305	.740	.580	.670
8-32UNC	832	.020-.080	80	17/64(.2656)	.390	.030	.420	.265	.305	.740	.640	.610
8-32UNC	832	.080-.130	130	17/64(.2656)	.390	.030	.470	.265	.305	.740	.580	.670
10-24UNC	1024	.020-.130	130	19/64(.2969)	.415	.030	.475	.296	.315	.990	.845	.730
10-24UNC	1024	.130-.225	225	19/64(.2969)	.415	.030	.585	.296	.315	.990	.735	.840
10-32 UNF	1032	.020-.130	130	19/64(.2969)	.415	.030	.475	.296	.315	.990	.845	.730
10-32 UNF	1032	.130-.225	225	19/64(.2969)	.415	.030	.585	.296	.315	.990	.735	.840
1/4-20 UNC	420	.027-.165	165	25/64(.3906)	.500	.030	.580	.390	.380	1.190	1.005	.895
1/4-20 UNC	420	.165-.260	260	25/64(.3906)	.500	.030	.680	.390	.380	1.190	.905	1.035
5/16-18 UNC	518	.027-.150	150	17/32(.5312)	.685*	.035	.690	.530	.470	1.390	1.175	.995
5/16-18 UNC	518	.150-.312	312	17/32(.5312)	.685*	.035	.805	.530	.425	1.390	1.025	1.120
3/8-16 UNC	616	.027-.150	150	17/32(.5312)	.685*	.035	.690	.530	.470	1.390	1.175	.995
3/8-16 UNC	616	.150-.312	312	17/32(.5312)	.685*	.035	.805	.530	.425	1.390	1.025	1.120
1/2-13 UNC	813	.063-.200	200	11/16(.6875)	.865*	.047	1.150	.685	.850	2.365	2.070	1.505
1/2-13 UNC	813	.200-.350	350	11/16(.6875)	.865*	.047	1.300	.685	.850	2.365	1.920	1.505
1/2-13 UNC	813	.365-.500	500	11/16(.6875)	.865*	.047	1.450	.685	.860	2.365	1.770	1.505

UNIT(单位): mm

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size $\begin{smallmatrix} +.015 \\ -.000 \end{smallmatrix}$	HD $\begin{smallmatrix} \pm .025 \\ \pm .064^* \end{smallmatrix}$	HH $\pm .008$	L $\pm .038$	D MAX.	IL MAX.	LB $\pm .038$	ILB MAX.	IATD* MAX.
M4x0,7 ISO	470	0,50-2,00	2.0	6,75	9,91	0,76	10,67	6,73	7,75	18,80	16,26	15,49
M4x0,7 ISO	470	2,00-3,30	3.3	6,75	9,91	0,76	11,94	6,73	7,75	18,80	14,73	17,02
M5x0,8 ISO	580	0,50-3,30	3.3	7,60	10,54	0,76	12,07	7,52	8,00	25,15	21,46	18,54
M5x0,8 ISO	580	3,30-5,70	5.7	7,60	10,54	0,76	14,86	7,52	8,00	25,15	18,67	21,34
M6x1,0 ISO	610	0,70-4,20	4.2	10,00	12,70	0,76	14,73	9,91	9,65	30,23	25,53	22,73
M6x1,0 ISO	610	4,20-6,60	6.6	10,00	12,70	0,76	17,27	9,91	9,65	30,23	22,99	26,29
M8x1,25 ISO	8125	0,70-3,80	3.8	13,50	17,40*	0,89	17,53	13,46	11,94	35,31	29,85	25,27
M8x1,25 ISO	8125	3,80-7,90	7.9	13,50	17,40*	0,89	20,45	13,46	10,80	35,31	26,04	28,45
M10x1,5 ISO	1015	0,70-3,80	3.8	13,50	17,40*	0,89	17,53	13,46	11,94	35,31	29,85	25,27
M10x1,5 ISO	1015	3,80-7,90	7.9	13,50	17,40*	0,89	20,45	13,46	10,80	35,31	26,04	28,45
M12x1,75 ISO	12175	1,60-5,10	5.1	17,45	21,97*	1,19	29,21	17,4	21,59	60,07	52,58	38,23
M12x1,75 ISO	12175	5,10-8,90	8.9	17,45	21,97*	1,19	33,02	17,4	21,59	60,07	48,77	38,23
M12x1,75 ISO	12175	8,90-12,7	12.7	17,45	21,97*	1,19	36,83	17,4	21,84	60,07	44,96	38,23

小头（菊花）竖条纹（美标）
Small Flat Head Knurled Body-AVK

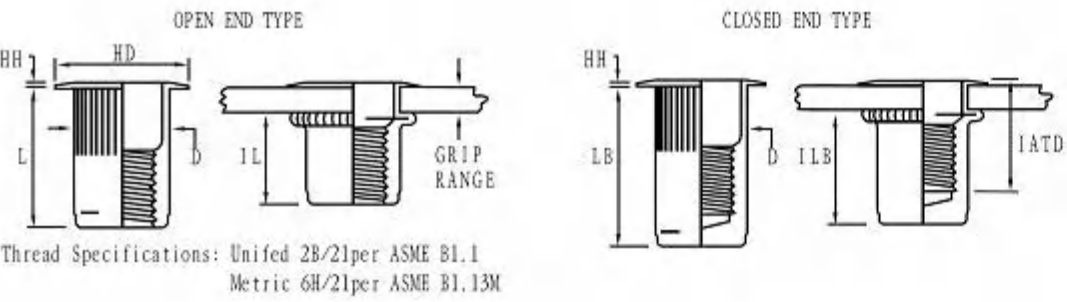


UNIT(单位): INCH

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size $\begin{smallmatrix} +.006 \\ -.000 \end{smallmatrix}$	HD $\pm .010$	HH $\pm .002$	L $\pm .015$	D MAX.	IL MAX.	LB $\pm .015$	ILB MAX.	IATD* MAX.
6-32 UNC	632	.020-.080	80	17/64(.2656)	.310	.019	.420	.265	.305	.740	.640	.610
6-32 UNC	632	.080-.130	130	17/64(.2656)	.310	.019	.470	.265	.305	.740	.580	.670
8-32 UNC	832	.020-.080	80	17/64(.2656)	.310	.019	.420	.265	.305	.740	.640	.610
8-32 UNC	832	.080-.130	130	17/64(.2656)	.310	.019	.470	.265	.305	.740	.580	.670
10-24 UNC	1024	.020-.130	130	19/64(.2969)	.340	.019	.475	.296	.315	.990	.845	.730
10-24 UNC	1024	.130-.225	225	19/64(.2969)	.340	.019	.585	.296	.315	.990	.735	.840
10-32 UNF	1032	.020-.130	130	19/64(.2969)	.340	.019	.475	.296	.315	.990	.845	.730
10-32 UNF	1032	.130-.225	225	19/64(.2969)	.340	.019	.585	.296	.315	.990	.735	.840
1/4-20 UNC	420	.027-.165	165	25/64(.3906)	.455	.022	.580	.390	.380	1.190	1.005	.895
1/4-20 UNC	420	.165-.260	260	25/64(.3906)	.455	.022	.680	.390	.380	1.190	.905	1.035
5/16-18 UNC	518	.027-.150	150	17/32(.5312)	.595	.022	.690	.530	.470	1.390	1.175	.995
5/16-18 UNC	518	.150-.312	312	17/32(.5312)	.595	.022	.805	.530	.425	1.390	1.025	1.120
3/8-16 UNC	616	.027-.150	150	17/32(.5312)	.595	.022	.690	.530	.470	1.390	1.175	.995
3/8-16 UNC	616	.150-.312	312	17/32(.5312)	.595	.022	.805	.530	.425	1.390	1.025	1.120

UNIT(单位): mm

Thread Size	Thread Call Out	Grip Range	Grip Call Out	Hole Size $\begin{smallmatrix} +.015 \\ -.000 \end{smallmatrix}$	HD $\pm .025$	HH $\pm .005$	L $\pm .038$	D MAX.	IL MAX.	LB $\pm .038$	ILB MAX.	IATD* MAX.
M4x0,7 ISO	470	0,50-2,00	2.0	6,75	7,87	0,48	10,67	6,73	7,75	18,80	16,26	15,49
M4x0,7 ISO	470	2,00-3,30	3.3	6,75	7,87	0,48	11,94	6,73	7,75	18,80	14,73	17,02
M5x0,8 ISO	580	0,50-3,30	3.3	7,60	8,64	0,48	12,07	7,52	8,00	25,15	21,46	18,54
M5x0,8 ISO	580	3,30-5,70	5.7	7,60	8,64	0,48	14,86	7,52	8,00	25,15	18,67	21,34
M6x1,0 ISO	610	0,70-4,20	4.2	10,00	11,56	0,55	14,73	9,91	9,65	30,23	25,53	22,73
M6x1,0 ISO	610	4,20-6,60	6.6	10,00	11,56	0,55	17,27	9,91	9,65	30,23	22,99	26,29
M8x1,25 ISO	8125	0,70-3,80	3.8	13,50	15,11	0,55	17,53	13,46	11,94	35,31	29,85	25,27
M8x1,25 ISO	8125	3,80-7,90	7.9	13,50	15,11	0,55	20,45	13,46	10,80	35,31	26,04	28,45
M10x1,5 ISO	1015	0,70-3,80	3.8	13,50	15,11	0,55	17,53	13,46	11,94	35,31	29,85	25,27
M10x1,5 ISO	1015	3,80-7,90	7.9	13,50	15,11	0,55	20,45	13,46	10,80	35,31	26,04	28,45


小沉菊花 (英标)
Reduce Head Round Body Plain-UK

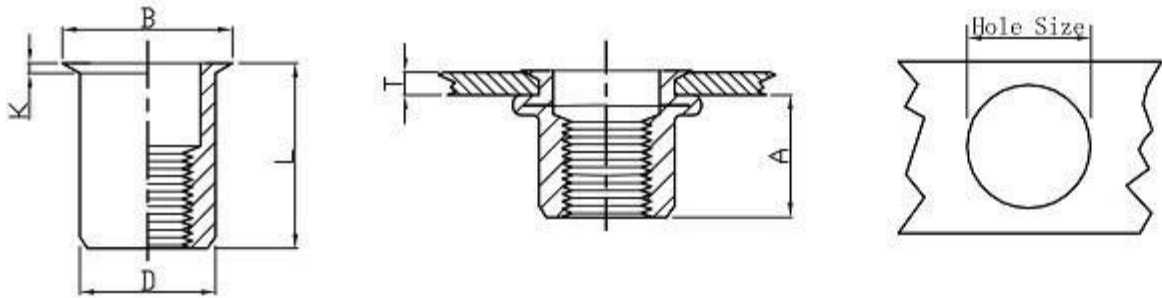

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D ± 0.05 ($^{+0.07}_{-0.1}$)	B	K	L $+1.0$ -1.0
		Min	Max						
M3	RH-RB-UK-0315	0.5	1.5	5.5	4.8	4.65	5.4	0.4	9.0
M4	RH-RB-UK-0420	0.5	2.0	6.5	6.4	6.25	7.0	0.5	10.5
M5	RH-RB-UK-0525	0.5	2.5	7.5	7.2	7.05	7.8	0.5	12.0
M6	RH-RB-UK-0630	1.0	3.0	9.2	9.6	9.45	10.3	0.6	15.0
M8	RH-RB-UK-0835	1.0	3.5	10.5	10.6	10.45	11.3	0.6	16.0
M10	RH-RB-UK-1040	1.0	4.0	12.8	12.8	12.65*	13.8	0.65	20.0


小沉头竖条纹 (英标)
Reduce Head Knurled Body-UK

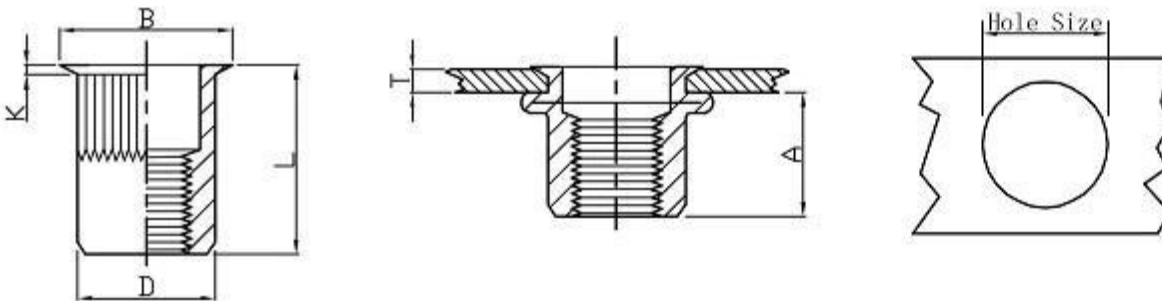

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D ± 0.05 ($^{+0.07}_{-0.1}$)	B	K	L $+1.0$ -1.0
		Min	Max						
M3	RH-KB-UK-0315	0.5	1.5	5.5	4.8	4.65	5.4	0.4	9.0
M4	RH-KB-UK-0420	0.5	2.0	6.5	6.5	6.35	7.0	0.5	10.5
M5	RH-KB-UK-0525	0.5	2.5	7.5	7.25	7.15	7.85	0.5	12.0
M6	RH-KB-UK-0630	1.0	3.0	9.2	9.6	9.45	10.3	0.6	15.0
M8	RH-KB-UK-0835	1.0	3.5	10.5	10.6	10.45	11.3	0.6	16.0
M10	RH-KB-UK-1040	1.0	4.0	12.8	12.8	12.65*	13.8	0.65	20.0


不锈钢平头光身
Stainless Steel Flat Head Round Body Plain

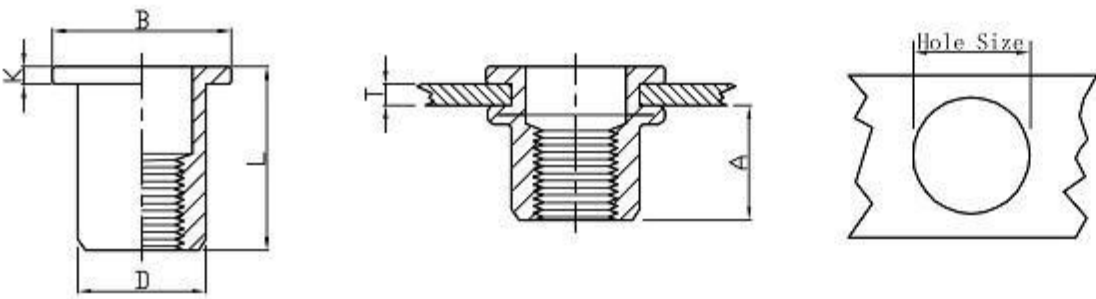

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $^{+0.07}_{-0.1}$	B	K	L $+1.0$ -1.0
		Min	Max						
M4	FH-RB/SS-0420	0.5	2.0	6.0	6.0	5.9	8.5	0.8	10.5
M5	FH-RB/SS-0525	0.5	2.5	7.5	7.0	6.9	10.0	1.0	13.0
M6	FH-RB/SS-0630	0.5	3.0	9.2	9.0	8.9	12.3	1.3	15.5
M8	FH-RB/SS-0835	1.0	3.5	11.5	11.0	10.9	15.0	1.5	18.5
M10	FH-RB/SS-1040	1.0	4.0	12.5	13.0	12.9	17.0	1.6	21.0


不锈钢平头光身 (盲孔)
Stainless Steel Flat Head Round Body Plain Closed End

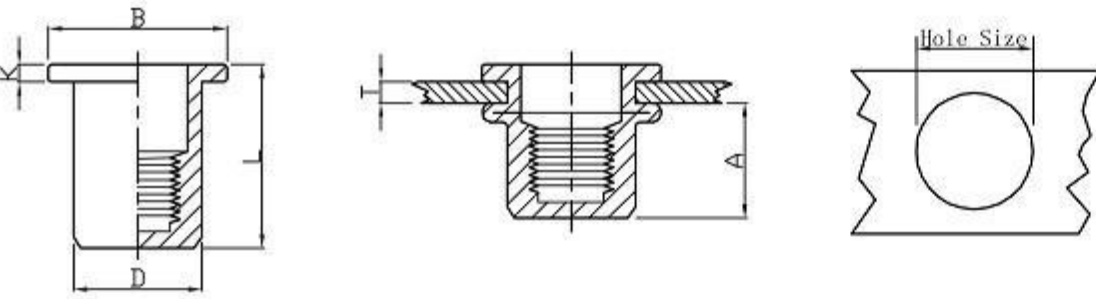

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Rer	Hole Size $+0.1$ 0	D $^{+0.07}_{-0.1}$	B	K	L $+1.0$ -1.0
		Min	Max						
M4	FH-RBC/SS-0420	0.5	2.0	11.3	6.0	5.9	9.0	0.8	16.0
M5	FH-RBC/SS-0525	0.5	2.5	13.8	7.0	6.9	10.0	1.0	19.0
M6	FH-RBC/SS-0630	0.5	3.0	15.0	9.0	8.9	12.3	1.3	21.0
M8	FH-RBC/SS-0835	1.0	3.5	18.2	11.0	10.9	15.5	1.5	25.0
M10	FH-RBC/SS-1040	1.0	4.0	19.4	13.0	12.9	17.0	1.6	27.0


不锈钢平头条纹
Stainless Steel Flat Head Knurled Body

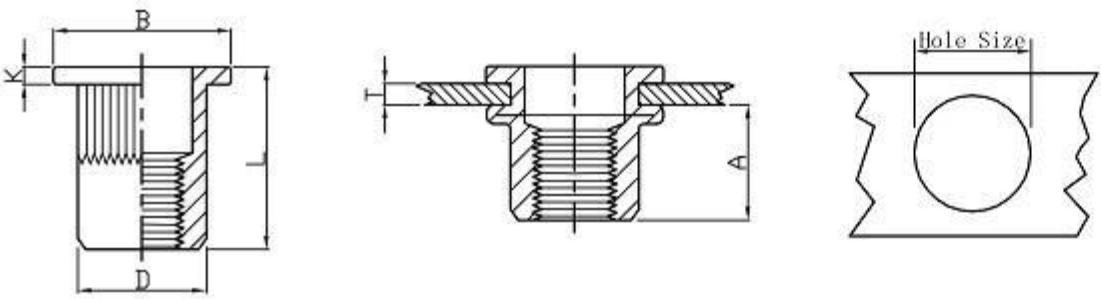

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-KB/SS-0315	0.5-1.5	5.0	5.0	4.9	8.0	0.8	9.0
M4	FH-KB/SS-0420	0.5-2.0	6.5	6.0	5.9	9.0	0.8	10.5
	FH-KB/SS-0440	2.0-4.0		8.0				12.0
M5	FH-KB/SS-0525	0.5-2.5	8.0	7.0	6.9	10.0	1.0	13.0
	FH-KB/SS-0540	2.0-4.0	8.5					15.0
M6	FH-KB/SS-0630	0.5-3.0	9.2	9.0	8.9	12.3	1.3	15.5
	FH-KB/SS-0650	3.0-5.0	10.5					19.5
M8	FH-KB/SS-0835	1.0-3.5	11.5	11.0	10.9	14.5	1.5	18.5
	FH-KB/SS-0855	3.5-5.5						21.5
M10	FH-KB/SS-1040	1.0-4.0	13.5	13.0	12.9	17.0	1.6	21.0
	FH-KB/SS-1060	4.0-6.0					1.7	24.0
M12	FH-KB/SS-1240	1.0-4.0	15.0	16.0	15.9	23.0	2.0	25.0
	FH-KB/SS-1260	4.0-6.0	16.0					28.0


不锈钢平头条纹（盲孔）
Stainless Steel Flat Head Knurled Body Closed End

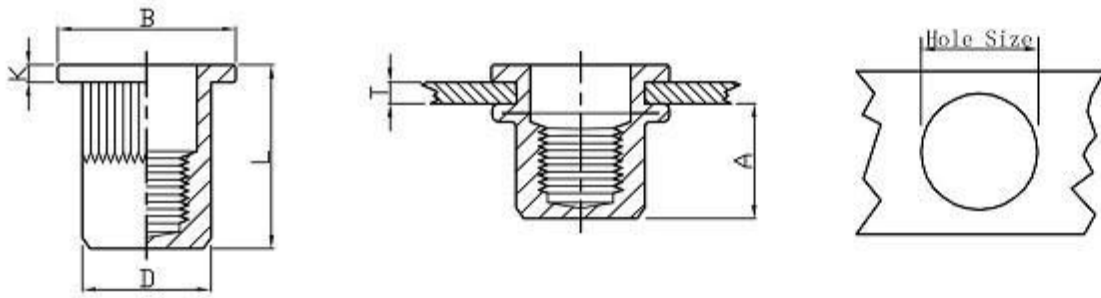

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-KBC/SS-0315	0.5-1.5	8.0	6.0	5.9	8.0	0.8	13.0
M4	FH-KBC/SS-0420	0.5-2.0	11.8	6.0	5.9	9.0	0.8	16.0
	FH-KBC/SS-0440	2.0-4.0						18.0
M5	FH-KBC/SS-0525	0.5-2.5	12.0	7.0	6.9	10.0	1.0	17.0
	FH-KBC/SS-0540	2.0-4.0						19.0
M6	FH-KBC/SS-0630	0.5-3.0	12.7	9.0	8.9	12.3	1.3	19.2
	FH-KBC/SS-0650	3.0-5.0						21.0
M8	FH-KBC/SS-0835	1.0-3.5	14.2	11.0	10.9	15.0	1.5	21.5
	FH-KBC/SS-0855	3.5-5.5	14.8			14.5		24.0
M10	FH-KBC/SS-1040	1.0-4.0	18.0	13.0	12.9	17.0	1.6	27.0
	FH-KBC/SS-1060	4.0-6.0	19.2				1.7	30.0
M12	FH-KBC/SS-1240	1.0-4.0	29.5	16.0	15.9	23.0	1.8	30.0
	FH-KBC/SS-1260	4.0-6.0					2.0	33.0


不锈钢小头光身
Stainless Steel Reduce Head Round Body Plain

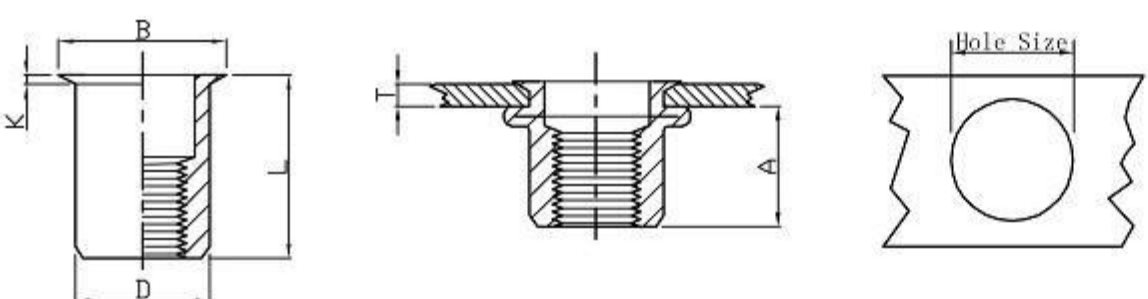

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	RH-RB/SS-0420	0.5-2.0	6.5	6.0	5.9	7.0	0.5	10.5
M5	RH-RB/SS-0520	0.5-2.0	7.0	7.0	6.9	8.0	0.5	11.5
M6	RH-RB/SS-0625	0.5-2.5	8.5	9.0	8.9	10.0	0.6	14.0
M8	RH-RB/SS-0830	0.5-3.0	10.5	11.0	10.9	12.0	0.65	16.5
M10	RH-RB/SS-1035	1.0-3.0	11.5	13.0	12.9	14.0	0.7	17.7


不锈钢小头光身（盲孔）
Stainless Steel Reduce Head Round Body Plain Closed End

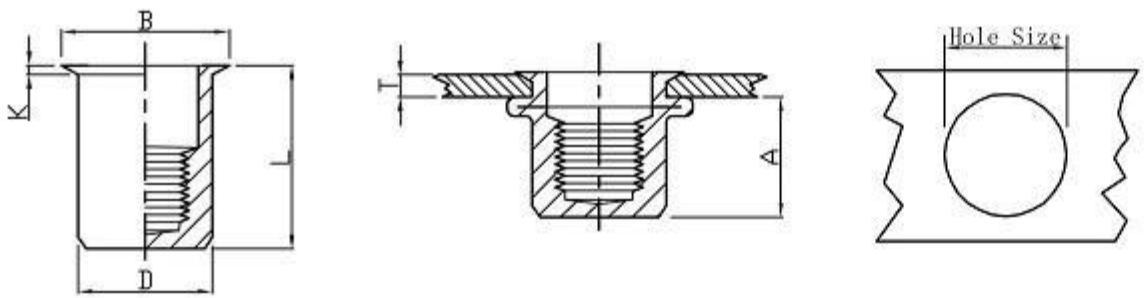

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	RH-RBC/SS-0420	0.5-2.0	11.0	6.0	5.9	7.0	0.5	15.0
M5	RH-RBC/SS-0520	0.5-2.0	12.5	7.0	6.9	8.0	0.5	16.5
M6	RH-RBC/SS-0625	0.5-2.5	15.5	9.0	8.9	10.0	0.6	20.5
M8	RH-RBC/SS-0830	0.5-3.0	17.6	11.0	10.9	12.0	0.65	23.0
M10	RH-RBC/SS-1035	1.0-3.5	18.3	13.0	12.9	14.0	0.7	24.5


不锈钢小头条纹
 Stainless Steel Reduce Head Knurled Body

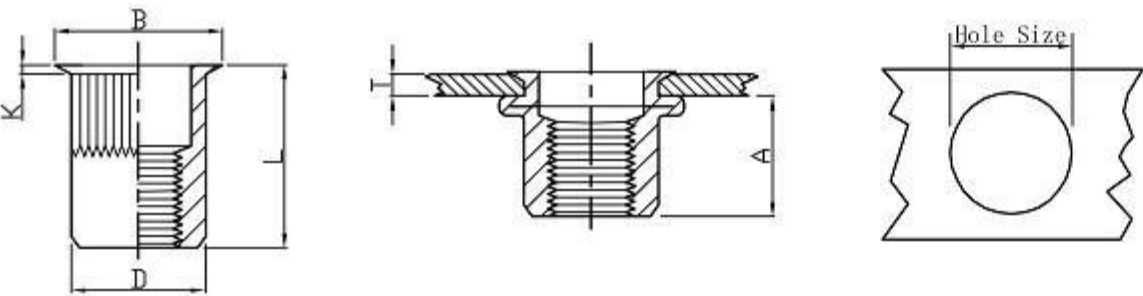

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	RH-KB/SS-0315	0.5-1.5	5.0	5.0	4.9	6.0	0.5	9.0
	RH-KB/SS-0325	1.5-2.5	6.2	5.0	4.9	6.0	0.5	11.5
M4	RH-KB/SS-0420	0.5-2.0	6.5	6.0	5.9	7.0	0.5	10.5
	RH-KB/SS-0440	2.0-4.0	7.0	6.0	5.9	7.0	0.5	13.0
M5	RH-KB/SS-0520	0.5-2.0	7.2	7.0	6.9	8.0	0.5	11.5
	RH-KB/SS-0540	2.0-4.0	7.2	7.0	6.9	8.0	0.5	13.0
M6	RH-KB/SS-0625	0.5-2.5	8.7	9.0	8.9	10.0	0.6	14.0
	RH-KB/SS-0650	2.5-5.0	8.7	9.0	8.9	10.0	0.6	16.0
M8	RH-KB/SS-0830	0.5-3.0	10.5	11.0	10.9	12.0	0.65	16.5
	RH-KB/SS-0850	3.0-5.0	10.5	11.0	10.9	12.0	0.65	19.5
M10	RH-KB/SS-1035	1.0-3.5	10.7	13.0	12.9	14.0	0.70	17.7
	RH-KB/SS-1060	3.5-6.0	12.5	13.0	12.9	14.0	0.75	23.0
M12	RH-KB/SS-1240	1.0-4.0	16.2	16.0	15.9	17.6	0.8	24.2
	RH-KB/SS-1260	4.0-6.5	16.2	16.0	15.9	17.6	0.8	27.0


不锈钢小头条纹 (盲孔)
 Stainless Steel Reduce Head Knurled Body Closed End

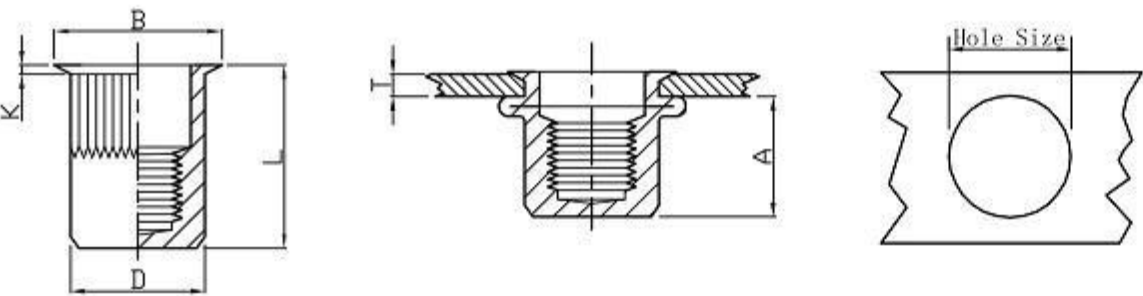

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	RH-KBC/SS-0315	1.5-2.5	8.5	5.0	4.9	6.0	0.5	13.0
M4	RH-KBC/SS-0420	0.5-2.0	11.2	6.0	5.9	7.0	0.5	15.0
	RH-KBC/SS-0440	2.0-4.0	11.2	6.0	5.9	7.0	0.5	16.5
M5	RH-KBC/SS-0520	0.5-2.0	11.5	7.0	6.9	8.0	0.5	16.5
	RH-KBC/SS-0540	2.0-4.0	11.5	7.0	6.9	8.0	0.5	18.0
M6	RH-KBC/SS-0625	0.5-2.5	15.0	9.0	8.9	10.0	0.6	20.5
	RH-KBC/SS-0645	2.5-4.5	15.0	9.0	8.9	10.0	0.6	22.0
M8	RH-KBC/SS-0830	0.5-3.0	17.5	11.0	10.9	12.0	0.65	23.0
	RH-KBC/SS-0850	3.0-5.0	17.5	11.0	10.9	12.0	0.70	24.5
M10	RH-KBC/SS-1035	1.0-3.5	18.0	13.0	12.9	14.0	0.7	24.5
	RH-KBC/SS-1055	3.5-5.5	18.0	13.0	12.9	14.0	0.8	26.0


不锈钢沉头光身
 Stainless Steel Countersunk Head Round Body Plain

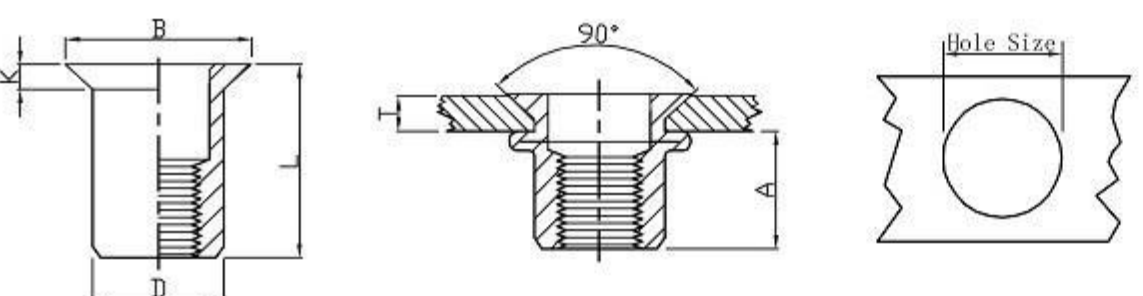

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	CH-RB/SS-0430	1.5-3.0	7.5	6.0	5.9	9.0	1.5	12.0
M5	CH-RB/SS-0535	1.5-3.5	7.8	7.0	6.9	10.0	1.5	13.0
M6	CH-RB/SS-0640	1.5-4.0	9.0	9.0	8.9	12.0	1.5	15.5
M8	CH-RB/SS-0845	2.0-4.5	12.0	11.0	10.9	14.0	1.5	18.5
M10	CH-RB/SS-1050	2.0-5.0	13.0	13.0	12.9	16.0	1.5	21.0


不锈钢沉头条纹
 Stainless Steel Countersunk Head Knurled Body

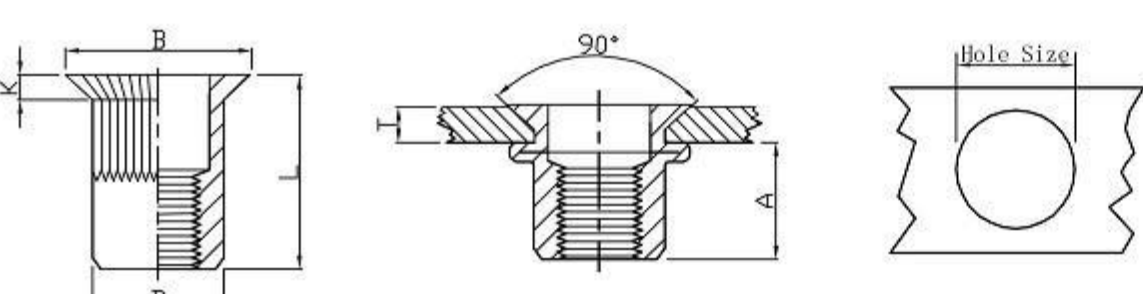

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	CH-KB/SS-0430	1.5-3.0	7.5	6.0	5.9	9.0	1.5	12.0
M5	CH-KB/SS-0535	1.5-3.5	7.8	7.0	6.9	10.0	1.5	13.0
M6	CH-KB/SS-0640	1.5-4.0	9.0	9.0	8.9	12.0	1.5	15.5
M8	CH-KB/SS-0845	2.0-4.5	12.0	11.0	10.9	14.0	1.5	18.5
M10	CH-KB/SS-1050	2.0-5.0	13.0	13.0	12.9	16.0	1.5	21.0
M12	CH-KB/SS-1240	2.0-5.0	17.5	16.0	15.9	18.0	1.7	24.0


不锈钢小头内外半六角
 Stainless Steel Reduce Hex Head Inner-Hex Body

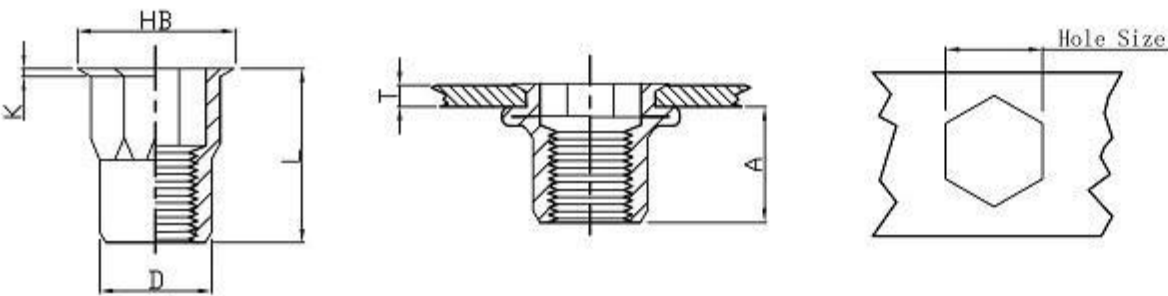

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	RHH-IHB/SS-0325	0.5-1.5	5.2	5.0	4.9	6.0	0.5	9.0
	RHH-IHB/SS-0325	1.5-2.5	5.5					11.0
M4	RHH-IHB/SS-0420	0.5-2.0	8.0	6.0	5.9	7.0	0.5	12.0
	RHH-IHB/SS-0440	2.0-4.0						14.0
M5	RHH-IHB/SS-0525	0.5-2.5	8.2	7.0	6.9	8.0	0.6	13.0
	RHH-IHB/SS-0540	2.0-4.0					0.5	15.0
M6	RHH-IHB/SS-0630	1.0-3.0	10.7	9.0	8.9	10.0	0.6	16.0
	RHH-IHB/SS-0650	3.5-5.0						18.0
M8	RHH-IHB/SS-0835	1.0-3.5	11.2	11.0	10.9	12.0	0.65	17.5
	RHH-IHB/SS-0850	3.5-5.0						19.5
M10	RHH-IHB/SS-1040	1.0-4.0	13.5	13.0	12.9	14.5	0.75	21.0
	RHH-IHB/SS-1050	3.5-5.0						23.0
M12	RHH-IHB/SS-1240	1.0-4.0	14.8	16.0	15.9	17.5	0.8	24.0
	RHH-IHB/SS-1260	4.0-6.0						27.0


不锈钢小头内外半六角(盲孔)
 Stainless Steel Reduce Hex Head Inner-Hex Body Closed End

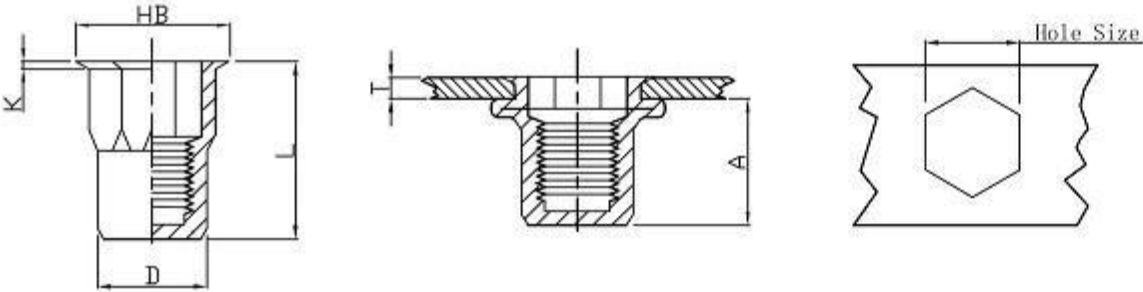

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	RHH-IHBC/SS-0315	0.5-1.5	8.5	5.0	4.9	6.0	0.5	13.0
	RHH-IHBC/SS-0320	1.5-2.5						15.0
M4	RHH-IHBC/SS-0420	0.5-2.0	11.5	6.0	5.9	7.0	0.5	15.5
	RHH-IHBC/SS-0440	2.0-4.0						17.5
M5	RHH-IHBC/SS-0525	0.5-2.5	13.5	7.0	6.9	8.0	0.5	18.0
	RHH-IHBC/SS-0540	2.0-4.0						20.0
M6	RHH-IHBC/SS-0630	0.5-3.5	15.8	9.0	8.9	10.0	0.6	21.5
	RHH-IHBC/SS-0650	3.5-5.0						23.0
M8	RHH-IHBC/SS-0835	1.0-3.5	18.2	11.0	10.9	12.0	0.65	24.0
	RHH-IHBC/SS-0850	3.5-5.0						26.0
M10	RHH-IHBC/SS-1040	1.0-4.0	23.2	13.0	12.9	14.5	0.75	30.5
	RHH-IHBC/SS-1050	3.5-5.0						33.0


不锈钢平头内外半六角
 Stainless Steel Flat Head Inner-Hex Body

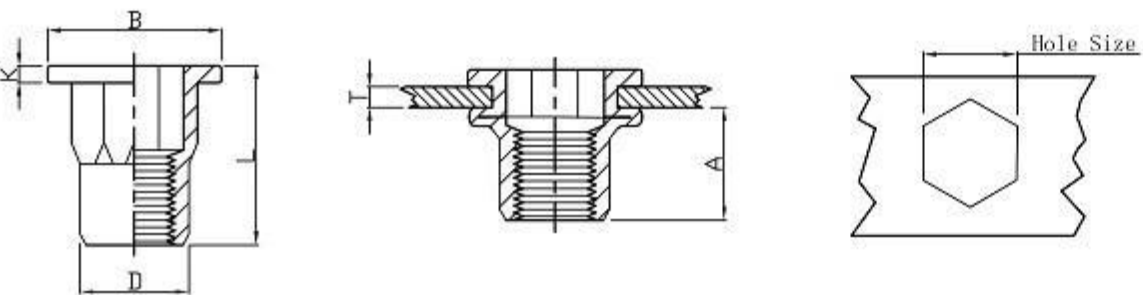

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-IHB/SS-0420	0.5-1.5	5.0	5.0	4.9	8.0	0.8	9.0
M4	FH-IHB/SS-0420	0.5-2.0	7.2	6.0	5.9	9.0	0.8	11.0
M5	FH-IHB/SS-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	12.0
M6	FH-IHB/SS-0630	0.5-3.0	9.2	9.0	8.9	12.7	1.3	15.5
M8	FH-IHB/SS-0835	1.0-3.5	11.0	11.0	10.9	16.0	1.5	18.0
M10	FH-IHB/SS-1040	1.0-4.0	13.2	13.0	12.9	18.0	1.7	21.0


不锈钢平头内外半六角(盲孔)
 Stainless Steel Flat Head Inner-Hex Body Closed End

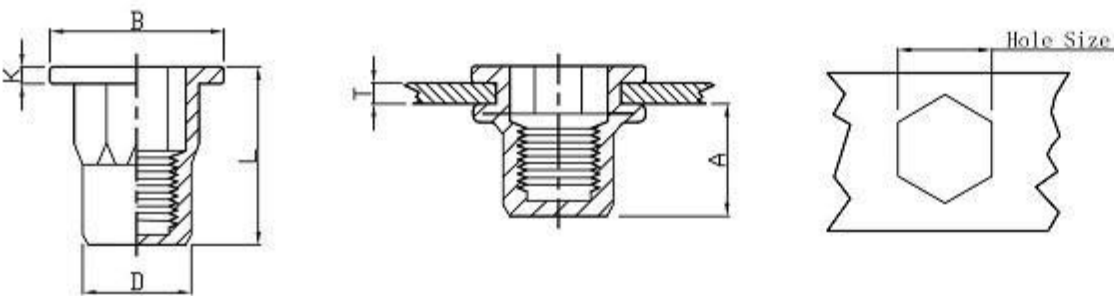

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	FH-IHBC/SS-0420	0.5-2.0	11.5	6.0	5.9	9.0	1.0	16.0
M5	FH-IHBC/SS-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.5
M6	FH-IHBC/SS-0630	0.5-3.0	17.0	9.0	8.9	12.7	1.5	23.0
M8	FH-IHBC/SS-0835	1.0-3.5	18.2	11.0	10.9	16.0	1.5	25.0
M10	FH-IHBC/SS-1040	1.0-4.0	25.0	13.0	12.9	19.0	1.7	33.0

不锈钢平头全六角
 Stainless Steel Flat Head Full Hex Body

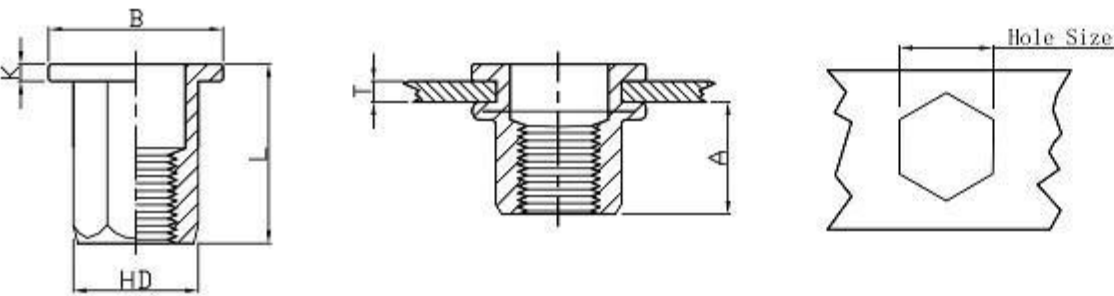


UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	FH-FHB/SS-0325	0.5-1.5	5.5	5.0	4.9	7.5	0.8	8.5
M4	FH-FHB/SS-0420	0.5-2.0	6.5	6.0	5.9	9.0	0.8	11.0
M5	FH-FHB/SS-0525	0.5-2.5	8.0	7.0	6.9	10.0	1.0	14.0
M6	FH-FHB/SS-0630	0.5-3.0	8.5	9.0	8.9	12.7(*13.0)	1.35	15.0(*16.0)
M8	FH-FHB/SS-0835	1.0-3.5	10.5	11.0	10.9	16.0	1.5	18.0
M10	FH-FHB/SS-1035	1.0-3.5	12.5	13.0	12.9	18.0(*19.0)	1.7	21.0(*23.0)
M10	FH-FHB/SS-1035(12H)	1.0-3.5	13.5	12.0	11.9	18.0	1.7	21.0
M12	FH-FHB/SS-1240(15H)	1.0-4.0	14.0	15.0	14.9	20.0	1.7	23.0
M12	FH-FHB/SS-1250(16H)	2.0-5.0	16.5	16.0	15.9	23.0	2.0	27.0

※部分为可代替尺寸，客户需要请另做说明
 ※Part are different series, if customer need this size, please mark.


不锈钢平头全六角(盲孔)
 Stainless Steel Flat Head Full Hex Body Closed End

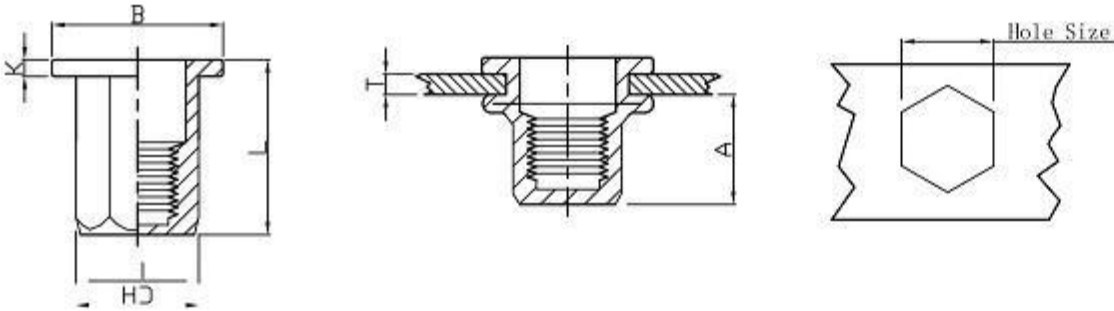

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	FH-FHBC/SS-0420	0.5-2.0	11.0	6.0	5.9	9.0	1.0	15.0
M5	FH-FHBC/SS-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.0
M6	FH-FHBC/SS-0630	0.5-3.0	17.0	9.0	8.9	12.7	1.5	23.0
M8	FH-FHBC/SS-0835	1.0-3.5	19.0	11.0	10.9	16.0	1.5	26.0
M10	FH-FHBC/SS-1040	1.0-4.0	25.0	13.0	12.9	19.0	2.0	33.0


不锈钢小头全六角
 Stainless Steel Reduce Head Full Hex Body

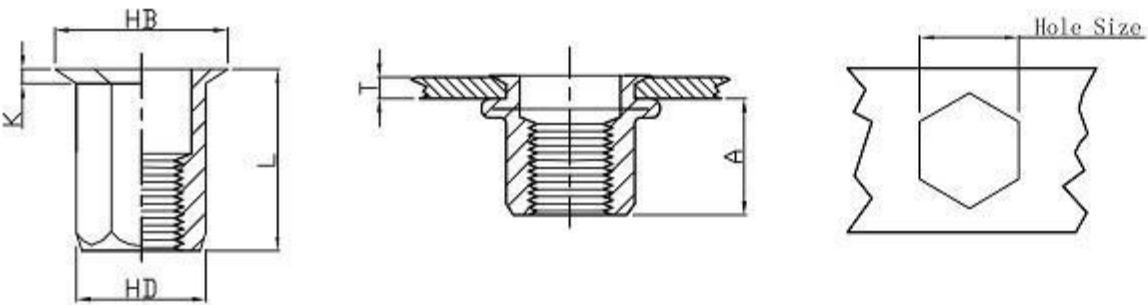

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M3	RHH-FHB/SS-0325	0.5-1.5	5.0	5.0	4.9	6.0	0.5	8.5
M4	RHH-FHB/SS-0425	0.5-2.5	6.7	6.0	5.9	7.0	0.5	11.0
M5	RHH-FHB/SS-0530	0.5-3.0	9.0	7.0	6.9	8.0	0.5	14.5
M6	RHH-FHB/SS-0635	1.0-3.5	10.0	9.0	8.9	10.0	0.6	16.0
M8	RHH-FHB/SS-0840	1.0-4.0	11.5	11.0	10.9	12.0	0.65	18.0
M10	RHH-FHB/SS-1035	1.0-3.5	12.5	12.0	11.9	13.5	0.75	20.0
M12	RHH-FHB/SS-1240	1.0-4.0	15.5	16.0	15.9	17.5	1.0	25.0


不锈钢小头全六角 (盲孔)
 Stainless Steel Reduce Head Full Hex Body Closed End

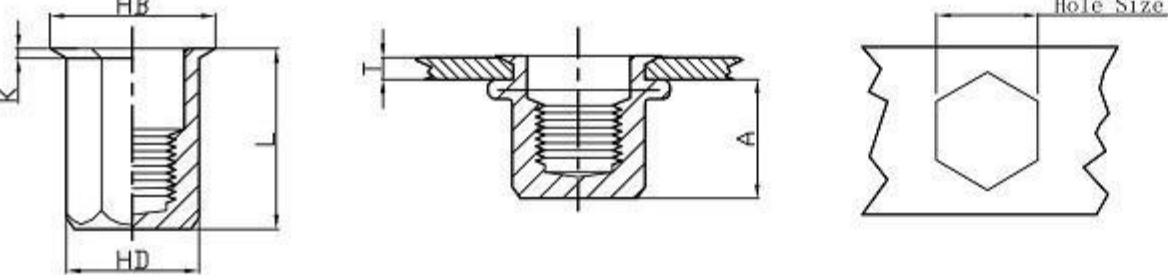

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M4	RHH-FHBC/SS-0425	0.5-2.5	12.3	6.0	5.9	7.0	0.5	16.0
M5	RHH-FHBC/SS-0530	0.5-3.0	15.2	7.0	6.9	8.0	0.5	20.0
M6	RHH-FHBC/SS-0635	0.5-3.5	14.5	9.0	8.9	10.0	0.6	20.5
M8	RHH-FHBC/SS-0840	1.0-4.0	17.0	11.0	10.9	12.0	0.65	23.0
M10	RHH-FHBC/SS-1045	1.0-4.5	20.0	13.0	12.9	14.5	0.75	28.5


铝平头菊花
Aluminum Flat Head Round Body Plain

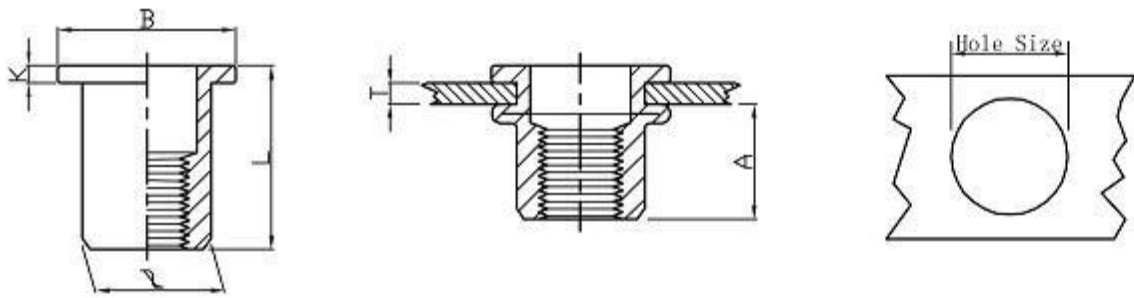

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	FH-RB/AL-0420	0.5	2.0	6.0	6.0	5.9	8.8*	0.8*	10.5*
M5	FH-RB/AL-0525	0.5	2.5	7.5	7.0	6.9	10.0	1.0	13.0
M6	FH-RB/AL-0625	0.5	2.5	9.2	9.0	8.9	12.3	1.5	15.0
M8	FH-RB/AL-0830	1.0	3.0	10.2	11.0	10.9	14.3	1.5	16.5
M10	FH-RB/AL-1040	1.0	4.0	11.5	13.0	12.9	16.3	1.6	19.0


铝平头菊花竖条纹
Aluminum Flat Head Knurled Body

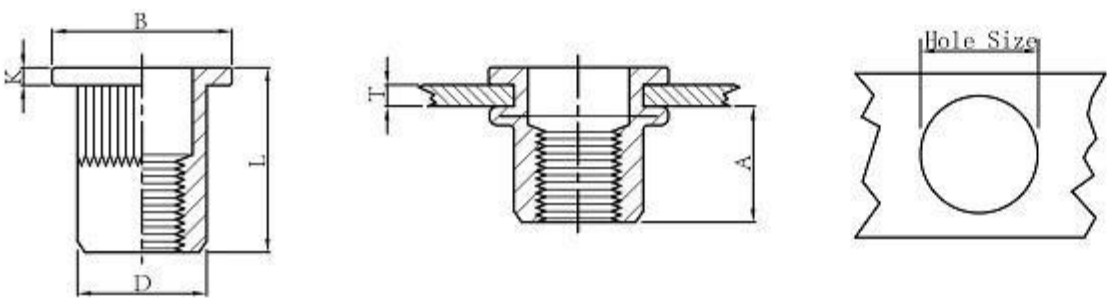

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	FH-KB/AL-0315	0.5	1.5	5.0	5.0	4.9	8.0	0.8	9.0
M4	FH-KB/AL-0420	0.5	2.0	6.0	6.0	5.9	8.8*	0.8*	10.5*
M5	FH-KB/AL-0525	0.5	2.5	7.5	7.0	6.9	10.0	1.0	13.0
M6	FH-KB/AL-0625	0.5	2.5	9.2	9.0	8.9	12.3	1.5	15.0
M8	FH-KB/AL-0830	1.0	3.0	10.2	11.0	10.9	14.3	1.5	16.5
M10	FH-KB/AL-1040	1.0	4.0	11.5	13.0	12.9	16.3	1.6	19.0


铝小沉头圆柱
Aluminum Reduce Head Round Body Plain

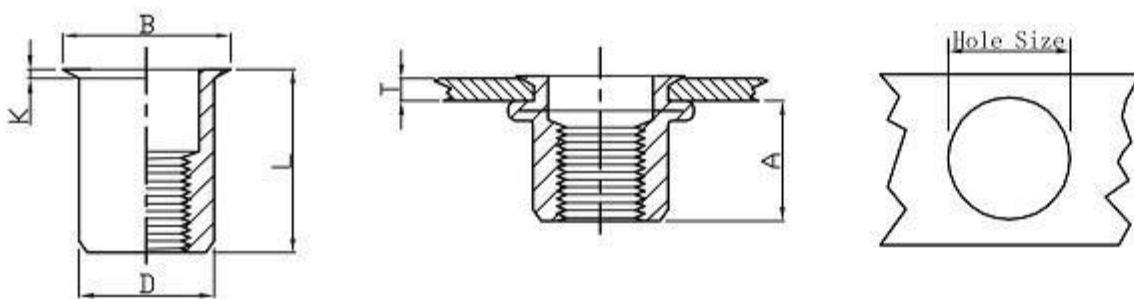

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M4	RH-RB/AL-0420	0.5	2.0	6.0	6.0	5.9	7.0	0.5	10.5
M5	RH-RB/AL-0520	0.5	2.0	7.5	7.0	6.9	8.0	0.5	11.5
M6	RH-RB/AL-0625	0.5	2.5	9.2	9.0	8.9	10.0	0.6*	14.0*
M8	RH-RB/AL-0825	0.5	2.5	10.2	11.0	10.9	12.0	0.65*	15.5*
M10	RH-RB/AL-1030	1.0	3.0	11.5	13.0	12.9	14.1	0.7*	17.7*


铝小沉头竖条纹
Aluminum Reduce Head Knurled Body

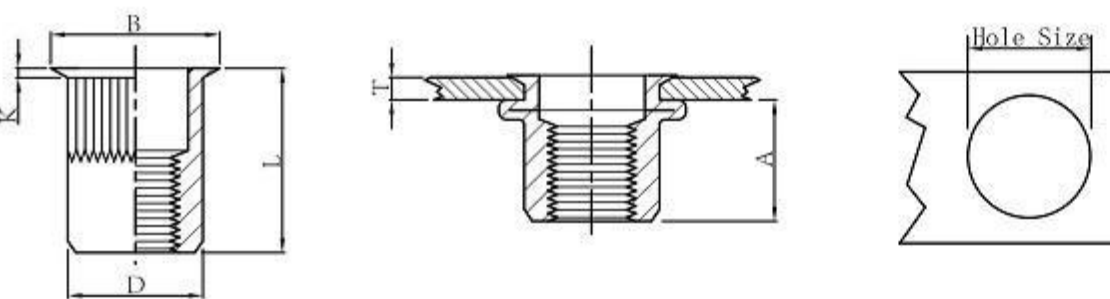

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE)		A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
		Min	Max						
M3	RH-KB/AL-0320	0.5	1.5	5.0	5.0	4.9	6.0	0.5	9.0
M4	RH-KB/AL-0420	0.5	2.0	6.0	6.0	5.9	7.0	0.5	10.5
M5	RH-KB/AL-0520	0.5	2.0	7.5	7.0	6.9	8.0	0.5	11.5
M6	RH-KB/AL-0625	0.5	2.5	9.2	9.0	8.9	10.0	0.6*	14.0*
M8	RH-KB/AL-0825	0.5	2.5	10.2	11.0	10.9	12.0	0.65*	15.5*
M10	RH-KB/AL-1030	1.0	3.0	11.5	13.0	12.9	14.1	0.7*	17.7*


平头方型铆螺母
Flat Head Square Body

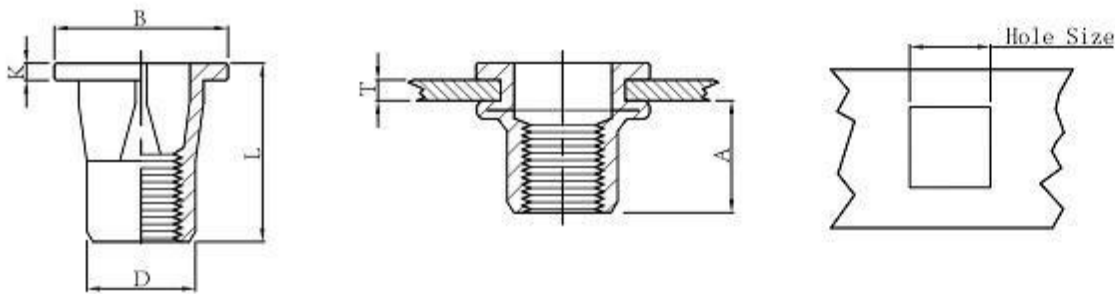

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M5	FH-SQB-0515	0.5-1.5	8	7.0	6.9	10.5	0.6	11.2
	FH-SQB-0530	1.5-3.0						
M6	FH-SQB-0625	0.5-2.5	8.5	9.0	8.9	14.0*	0.8*	14.3
	FH-SQB-0640	2.5-4.0	9.5				0.8*	17.2*
M8	FH-SQB-0830	1.0-3.0	11.5	11.0	10.9	17.5*	1.3*	18.6*

膨胀铆螺母
Flat Head Slotted Body

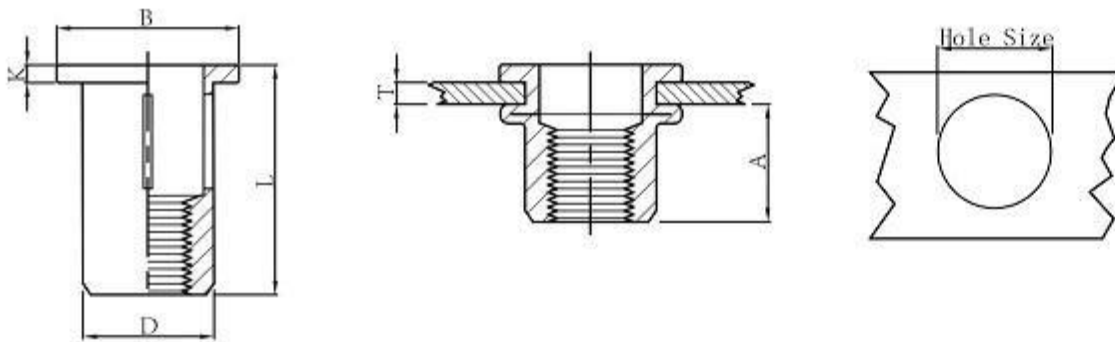

UNIT(单位): mm

螺纹 Thread	编号 P/N	T(GRIP RANGE) Min Max	A Ref	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L $+1.0$ -1.0
M5	FH-SLB-0545	0.5-4.5	9.6	7.5	7.4	12.7	1.0	22.0
M6	FH-SLB-0670	0.5-7.0	12.5	8.8	8.7	16.0	1.5	27.0
M8	FH-SLB-0870	1.0-7.0	14.3	11.1	11.0	19.0	1.6	30.5

其他
Other



※我们除了样本中的标准铆螺母以外,还生产其他很多非标类铆螺母以及其他非标汽车紧固件。
We offer lots of non-standard rivet nuts that you can not find in the catalogue also lots auto parts.