

TACFLEX FLEXIBLE CONDUIT FITTINGS



FLEXIBLE SPIRAL CONDUIT FITTINGS FIXED BODY


TECHNICAL DETAILS

Material

Ring	: Brass with nickel plated
Fixed gland body	: Brass with nickel plated
O-ring	: NBR
Connection thread	: Metric (EN60423) / PG (DIN 40430)
Protection class	: IP54
Temperature range	: -30 °C + 100 °C
Certificates	

Properties

Easy to assemble
Fixed or swivel body versions
Apply with either OCGS or OPCGS type conduits




SABİT DIŞ SİRAL BORU RAKORU

Hammaddesi	: Piring, nikel kaplı
Bağlantı dişi M	: EN 60423
Bağlantı dişi PG	: DIN 40430
Koruma sınıfı	: IP54
O-ring	: Nitril kauçuk
Uygun spiral	: OCGS-OPCGS

METRIC/PG THREAD FIXED BODY

AG Thread	Code	H mm.	GL mm.	L mm.	D mm.	 mm.	E mm.
M 12 x 1,5	MMR 12	24	8	13	6	15	7,5 x 11,5
M 16 x 1,5	MMR 16	24	8	13	7	20	9 x 13
M 16 x 1,5	MMR 116	26	10	13	9	20	11 x 15
M 20 x 1,5	MMR 20	26	10	13	12	22	14 x 18
M 20 x 1,5	MMR 120	26	10	13	14	22	16 x 20
M 25 x 1,5	MMR 25	27	10	13	18	28	21 x 25
M 32 x 1,5	MMR 32	31	12	15	23	35	26 x 31
M 40 x 1,5	MMR 40	36	14	17	33,5	45	35 x 40
M 50 x 1,5	MMR 50	36	14	17	37	55	40 x 45
M 63 x 1,5	MMR 63	36	14	17	46	65	51 x 56
PG 7	MPR 7	24	8	13	6	15	7,5 x 11,5
PG 9	MPR 9	24	8	13	7	17	9 x 13
PG 11	MPR 11	26	10	13	9	20	11 x 15
PG 13,5	MPR 13,5	26	10	13	12	22	14 x 18
PG 16	MPR 16	26	10	13	14	24	16 x 20
PG 21	MPR 21	27	10	13	18	30	21 x 25
PG 29	MPR 29	31	12	15	23	40	26 x 31
PG 36	MPR 36	36	14	17	33,5	50	35 x 40
PG 42	MPR 42	36	14	17	37	60	40 x 45
PG 48	MPR 48	36	14	17	46	65	51 x 56

TACFLEX STAINLESS STEEL FLEXIBLE CONDUITS

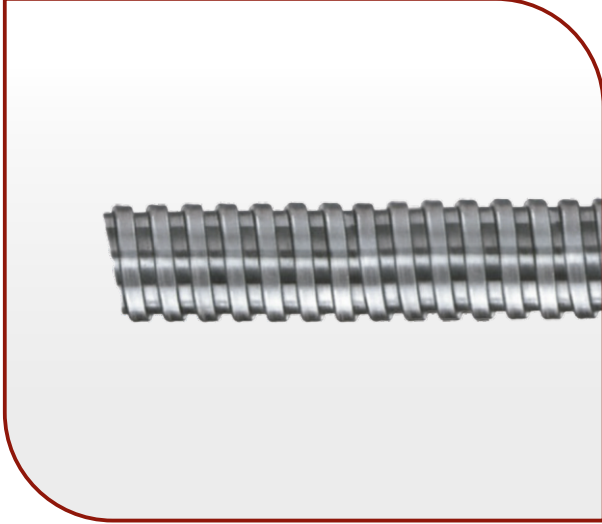


FLEXIBLE SPIRAL CONDUITS STAINLESS STEEL

TECHNICAL DETAILS

Material : Stainless Steel AISI 304L
Protection class : IP40
Temperature range : -100 °C +300 °C

Properties

High impact strength
High abrasion resistance
Halogen free
Low fire hazard
Self extinguishing
Full-shrink packing



PASLANMAZ ÇELİK SİRAL BORULAR

Hammaddesi : Paslanmaz çelik AISI 304L
Sürekli ısıya direnci : -100 °C + 300 °C

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
OCSS 07	-	7,5	10,5	50
OCSS 09	1/4"	9	12	50
OCSS 11	3/8"	11	14	50
OCSS 13	3/8"	13	15,5	50
OCSS 14	-	14	17	50
OCSS 16	1/2"	16	19	50
OCSS 18	-	18	21	50
OCSS 21	3/4"	21	24	50
OCSS 26	1"	26	30	25
OCSS 29	-	29	33	25
OCSS 32	-	32	36	25
OCSS 35	1 1/4"	35	39	25
OCSS 37	-	37	41	25
OCSS 40	1 1/2"	40	44	25
OCSS 42	-	42	46	25
OCSS 45	-	45	49	25
OCSS 51	2"	51	55	25
OCSS 63	2 1/2"	63	67	25
OCSS 75	3"	75	80	25